
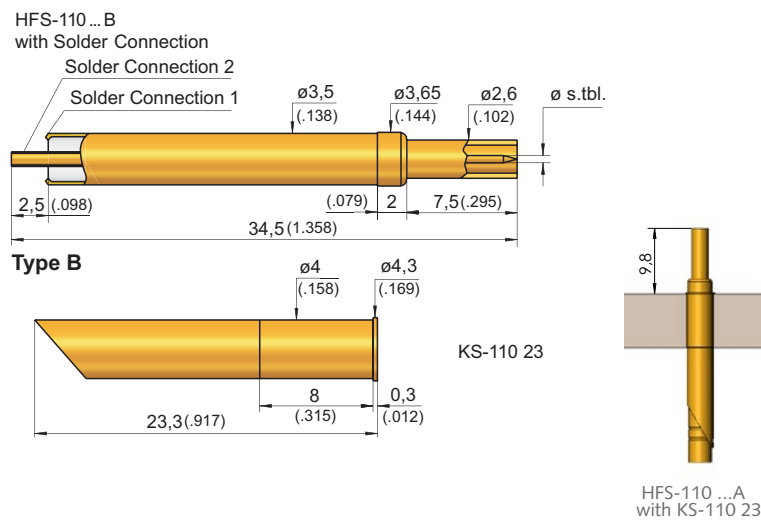


Grid:
 ≥ 4,50 mm
 ≥ 177 Mil

Installation height with KS: 9,8 mm (.386)
Recommended stroke: 4,0 mm (.157)

Mounting and functional dimensions

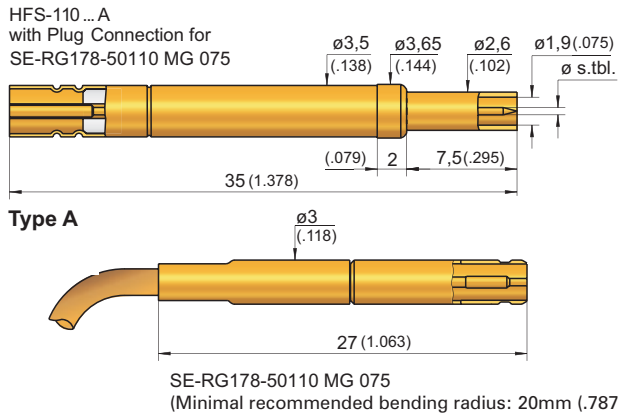

		Available tip styles inner conductor		
Material	Tip style	Plating	Further versions	
			∅	∅ (inch)
3	01	A	∅ 0,50 (.020)	
3	02	A	∅ 0,50 (.020)	
3	03	A	∅ 1,15 (.045)	
3	04	A	∅ 1,15 (.045)	
3	05	A	∅ 1,15 (.045)	
3	06	A	∅ 1,15 (.045)	
3	07	A	∅ 1,00 (.039)	
3	08	A	∅ 1,15 (.045)	

		Available tip styles outer plunger	
02			
06			

Mechanical data
Working stroke: 4,0 mm (.157)
Maximum stroke: 5,0 mm (.197)
Spring force at working stroke
 - outer conductor: 3,0 N (10.8oz)
 - inner conductor: 1,5 N (5.4oz)

Materials
Plunger: BeCu, gold-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated
Receptacle: Brass, gold-plated
Insulation: Teflon

Note:
 The inner conductor is fixed in the probe, and therefore cannot be changed.

Electrical data
Frequency range: up to 700 MHz
Current rating: 3 A
R_i typical: < 20 mΩ
Impedance test probe: 50 Ω
Impedance cable: 50 Ω

Mounting hole size
with receptacle: ∅ 3,98 - 3,99 mm (.1567 - .1571)
without receptacle: ∅ 3,50 mm (.1378)

Operating temperature
Standard: -40° up to +80 °C

Ordering example

