


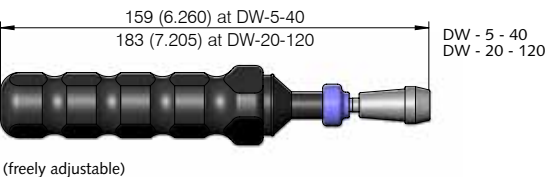


Series	Plunger Tip-Ø	Bit Tool	Ø A (mm)	Ø B (mm)	C (mm)	Torque Key			Recommend screw-in torque		Insertion Tools for Receptacles
						pre-set	freely adjustable		min.	max.	
T-112 M	≤ 2,0 mm	BIT-GKS-112 M-B	2,7	5	30	DW-5-S	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-112
T-112 M	≤ 3,5 mm	BIT-GKS-112 M	4,3	6	27	DW-5-S	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-112
T-113 M	≤ 3,0 mm	BIT-GKS-113 M-B	4,8	4,8	-	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-113
T-113 M	≤ 4,2 mm	BIT-GKS-113 M	5,3	6	27	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-113
T-113 M	≤ 5,0 mm	BIT-T-113 M	6	-	-	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-113
<b>NEW</b> T-888 M	3,0 - 4,0 mm	BIT-T-888 M-3	3,5	6	23	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-113
<b>NEW</b> T-888 M	4,0 - 4,7 mm	BIT-T-888 M	5	6	23	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-113
<b>NEW</b> T-888 M	5,0 mm	BIT-T-912 M	2,6	6	23	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-113
T-899 M	≤ 1,5 mm	BIT-GKS-899 M-B	2,4	5	30	DW-3-S	-	-	2 Ncm	3 Ncm	SW-KS-100
<b>NEW</b> T-912 M	2,0 - 3,5 mm	BIT-T-912 M	2,6	6	23	DW-5-S	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-112
VF-3	≤ 2,1 mm	BIT-VF3 M-B	3,3	5	29	DW-5-S	DW-5-40	-	3 Ncm	5 Ncm	SW-GKS
VF-3	≤ 3,0 mm	BIT-VF3 M	4	6	27	DW-5-S	DW-5-40	-	3 Ncm	5 Ncm	SW-GKS
VF-4	≤ 2,5 mm	BIT-VF4 M-B	4	4	-	-	DW-5-40	-	5 Ncm	10 Ncm	SW-KS-103
VF-4	≤ 4,0 mm	BIT-VF4 M	4	6	27	-	DW-5-40	-	5 Ncm	10 Ncm	SW-KS-103
VF-5	≤ 3,0 mm	BIT-GKS-113 M	5,3	6	27	DW-20	DW-5-40	DW-20-120	5 Ncm	20 Ncm	on Request

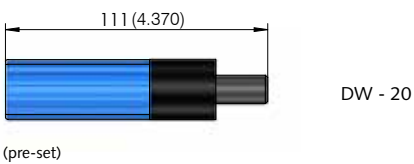

Application example:  
BIT-GKS-113 M with Test Probe GKS 113 M



## Ordering Example

Bit-tool for screw-in Probe:

Handle without ratchet:

Torque keys pre-set:

Torque keys freely adjustable:

BIT - GKS - 112 M - B

DW - S

DW - 1 - S

DW - 3 - S

DW - 5 - S

DW - 20

DW - 5 - 40

DW - 20 - 120