

MA 2112		
<b>Part No. 32660</b> (Basic Unit)	MA 2112/D/H/S-7	Outside Dimensions: 460 x 515 x 270 mm (w x d x h)* Contact Force: max. 2.000 N Interface Pin Blocks: max. 7
<b>Part No. 33651</b> (Basic Unit)	MA 2112-2/D/H/S-7, dual-stage Version	Technical data see MA 2112
<b>Part No. 31190</b> (Replacement Kit)	ATS 2112 VG-2 prepared for mounting of 2 x VG-96 pole Male Connector	Usable Area: 295 x 250 mm**
<b>Part No. 32340</b> (Replacement Kit)	ATS 2112/S-7 prepared for mounting of max. 7 Interface Blocks	Usable Area: 295 x 250 mm**
<b>Part No. 32330</b> (Replacement Kit)	ATS 2112 without S-7 without Interface Mounting	Usable Area: 295 x 250 mm**

The high contacting force of 2.000 N allows the combination of Mechanical Fixtures with In-circuit Test Systems. Here you can find a number of chosen variants for connection to the Test System, which are also available as a dual-stage Version (ICT/FCT).

<b>Part No. 33460</b>	MA 2112/D/H/S-7/HG (tall Housing)	Outside Dimensions: 460 x 520 x 375 mm (w x d x h)*
<b>Part No. 33462</b>	MA 2112/D/H/S-7/GR 2270/71	Outside Dimensions: 483 x 548 x 262 mm (w x d x h)*
<b>Part No. 33457</b>	MA 2112/D/H/S-7/HG/GR2270/71	Outside Dimensions: 483 x 548 x 363 mm (w x d x h)*
<b>Part No. 33681</b>	MA 2112/D/H/S-7/Pylon 9,6	Outside Dimensions: 460 x 460 x 275 mm (w x d x h)*
<b>Part No. 32965</b>	MA 2112/F/H/S-7/TD 88xx-S	Outside Dimensions: 550 x 548 x 263 mm (w x d x h)*
<b>Part No. 33464</b>	MA 2112/F/H/S-7/TD 88xx-M	Outside Dimensions: 550 x 548 x 263 mm (w x d x h)*
<b>Part No. 32958</b>	MA 2112/D/H/S-7/MTS 300	Outside Dimensions: 574 x 572 x 269 mm (w x d x h)*


Further variants available.

\* Details see page 14


\*\* The outside dimensions of the PC-Board can in some cases be larger than the stated usable area.



MA 2112

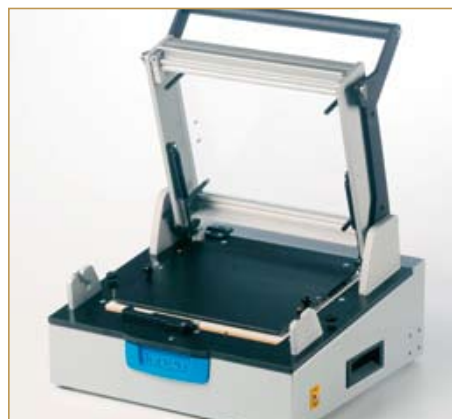

MA 2112 Pressure Frame open

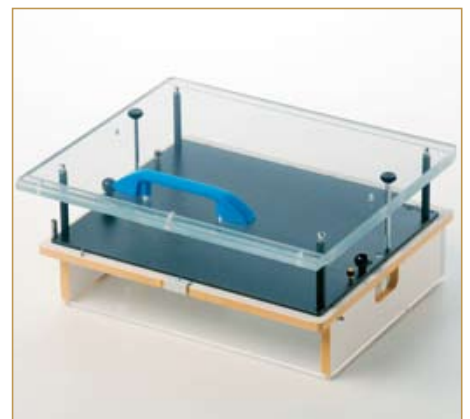

Replacement Kit ATS 2112