


▶ 101712 PROBE

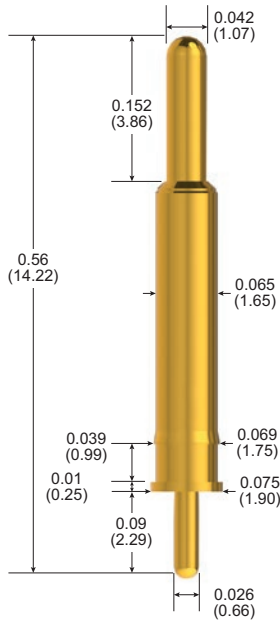

PROBE SPECIFICATIONS

Minimum Centers	0.10 (2.54)
Current Rating	3 A continuous <i>(individual probe in free air @ ambient temperature)</i>
Spring Force	102 g @ 0.06 (1.52) travel
Typical Resistance	< 50 mΩ
Maximum Travel	0.12 (3.05)
Working Travel	0.06 (1.52)


MATERIALS

Barrel	Brass, gold plated
Spring	Stainless steel
Plunger	Brass, gold plated

HOW TO ORDER

Part Number	101712-000
--------------------	------------

▶ 101530 PROBE



PROBE SPECIFICATIONS

Minimum Centers	0.07 (1.78)
Current Rating	1 A continuous <i>(individual probe in free air @ ambient temperature)</i>
Spring Force	71 g @ 0.042 (1.07) travel
Typical Resistance	< 50 mΩ
Maximum Travel	0.05 (1.27)
Working Travel	0.042 (1.07)

MATERIALS

Barrel	Brass, gold plated
Spring	Stainless steel
Plunger	Full-hard beryllium copper, gold plated

HOW TO ORDER

Part Number	101530-000
--------------------	------------