


▶ 100671 PROBE

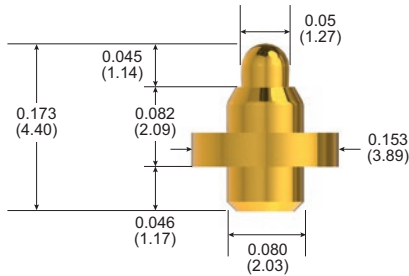

PROBE SPECIFICATIONS

Minimum Centers	0.175 (4.45)
Current Rating	3 A continuous <i>(individual probe in free air @ ambient temperature)</i>
Spring Force	145 g @ 0.027 (0.69) travel
Typical Resistance	< 10 mΩ
Maximum Travel	0.04 (1.02)*
Working Travel	0.027 (0.69)

MATERIALS


Barrel	Nickel/silver, gold plated
Spring	Stainless steel, gold plated
Plunger	Beryllium copper, gold plated

HOW TO ORDER

Part Number	100671-000
--------------------	------------

*Not recommended for use at maximum travel

▶ 101111 PROBE



PROBE SPECIFICATIONS

Minimum Centers	0.029 (0.75)
Current Rating	6 A continuous <i>(individual probe in free air @ ambient temperature)</i>
Spring Force	43 g @ 0.022 (0.55) travel
Typical Resistance	< 50 mΩ
Maximum Travel	0.025 (0.58)
Working Travel	0.022 (0.55)

MATERIALS

Barrel	Phosphor bronze, gold plated
Spring	Music wire, gold plated
Plunger	Phosphor bronze, gold plated

HOW TO ORDER

Part Number	101111-000
--------------------	------------