


▶ 100803 PROBE

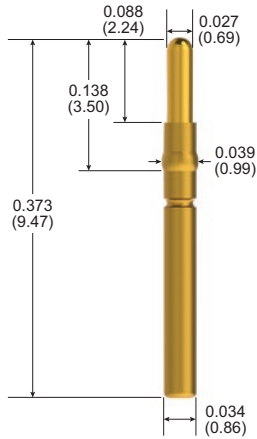

PROBE SPECIFICATIONS

Minimum Centers	0.05 (1.27)
Current Rating	5 A continuous <i>(individual probe in free air @ ambient temperature)</i>
Spring Force	34 g @ 0.05 (1.27) travel
Typical Resistance	< 50 mΩ
Maximum Travel	0.06 (1.52)
Working Travel	0.05 (1.27)


MATERIALS

Barrel	Nickel/silver, gold plated
Spring	Stainless steel, gold plated
Plunger	Beryllium copper, gold plated

HOW TO ORDER

Part Number	100803-011
--------------------	------------

▶ 101190 PROBE

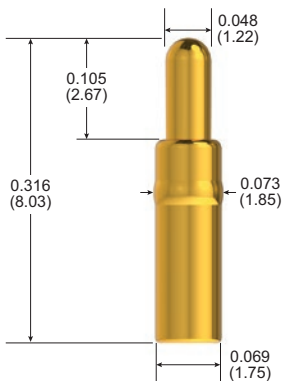

PROBE SPECIFICATIONS

Minimum Centers	0.10 (2.54)
Current Rating	15 A continuous <i>(individual probe in free air @ ambient temperature)</i>
Spring Force	74 g @ 0.067 (1.70) travel
Typical Resistance	< 6 mΩ
Maximum Travel	0.10 (2.54)
Working Travel	0.067 (1.70)

MATERIALS

Barrel	Nickel/silver, gold plated
Spring	Stainless steel
Plungers	Beryllium copper, gold plated

HOW TO ORDER

Part Number	101190-002
--------------------	------------