

Plastic hoods

Black or metallized plastic for shielding

D-Sub Hoods



A wide range of black or metallized plastic hoods for applications with shielding requirements. Quick and easy assembly through a practical design with a minimized number of single parts is an essential feature of the D-Sub plastic hoods. The tailor-made solution can be implemented with a wide range of options with regard to locking, cable outlet and a comprehensive range of accessories.

Various locking options

- Screw locking with knurled screws in different lengths
- Push-pull locking with the innovative „Quick Lock“ system
- Sliding lock in universal design

Cable connection versions for the highest requirements

All hood series

- Cable clamp internally as a compact solution

Quick Lock and 07er Hoods (Sliding / Clip Locking):

- 360 ° EMI / RFI crimp flange system vibration- and torsion-proof
- External cable clamp for diameter 4-14 mm (50-pole: up to 16 mm)

The right hood for every application

- Plastic hoods
- Metallized plastic hoods for applications with shielding requirements
- Adapter hoods in black or metallized

Technical data	
IP protection class	IP 20
Temperature range black	-20° C to + 90° C
Temperature range metallized	-40° C to + 90° C
Tightening torque	
Cable clamp screw	max. 30 Ncm
Cover screw	max. 20 Ncm
Housing (metallized)	ABS UL 94-V0 (Ni-plated)
Locking screws	St Ni-plated
Cable diameter	
Series 07/ 17/ 47/ 57	9+15:max. 8,5 / 25 + 37:max. 11 / 50:max. 12
Series 77	max. 10
Series 103/104 QuickLock	9:9/ 15:10/ 25+37:11/ 50:12




Plastic hood (series 17)

Very compact design and screw-locking

- Two-part plastic case with straight cable outlet
- Made from high-quality black ABS plastic, flame-retarding acc. to UL 94 V-0
- Hood pluggable in 3 TE-grid
- Integrated dust protection shoulder
- UNC 4-40 knurled screws (M3 also available)
- Multiple opening possible
- Also available in green, red and blue

Dimensions

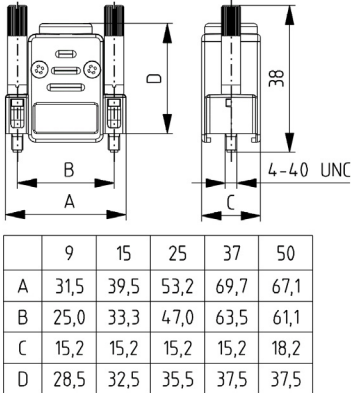




Stud hood (series 57)

With lateral screw-locking

- Minimized assembly time due to stud locking of the hood halves
- Suitable for flat cable connectors
- Made from high-quality black ABS plastic, flame-retarding acc. to UL 94 V-0
- Available with metallized or black surface
- UNC 4-40 knurled screw (M3 also available)

Dimensions

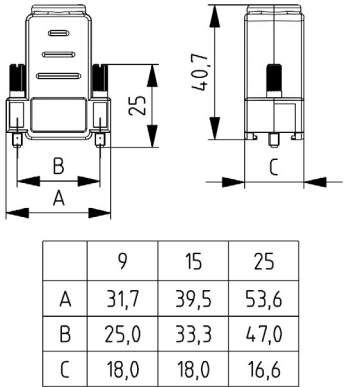


Technical data (mutual data on pages 153 & 154)

IP protection class:	IP 20
Cable diameter:	9+15:10 / 25:11
Temperature range:	-20° C to +90° C
Housing:	ABS UL 94-V0 black

Order information

57090B25T001	9-pole set
57150B25T001	15-pole set
57250B25T001	25-pole set
57090B25T000	9-pole single parts
57150B25T000	15-pole single parts
57250B25T000	25-pole single parts

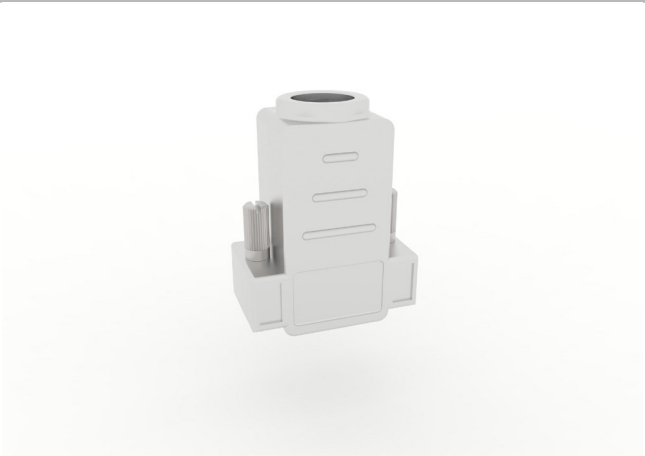


Stud hood metallized (series 57)

With lateral screw-locking

- Minimized assembly time due to stud locking between the hood halves
- Suitable for flat cable connectors
- Made from high-quality metallized ABS UL 94 V-0
- High shielding attenuation for EMC applications
- Pre-assembled UNC 4-40 knurled screw (alternatively M3)

Dimensions

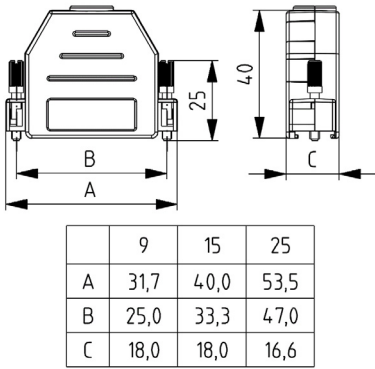

Technical data (mutual data on pages 153 & 154)

IP protection
