


Potentiometer Screwing Unit **Compact Screwing Unit for space-saving Potentiometer Adjustments**

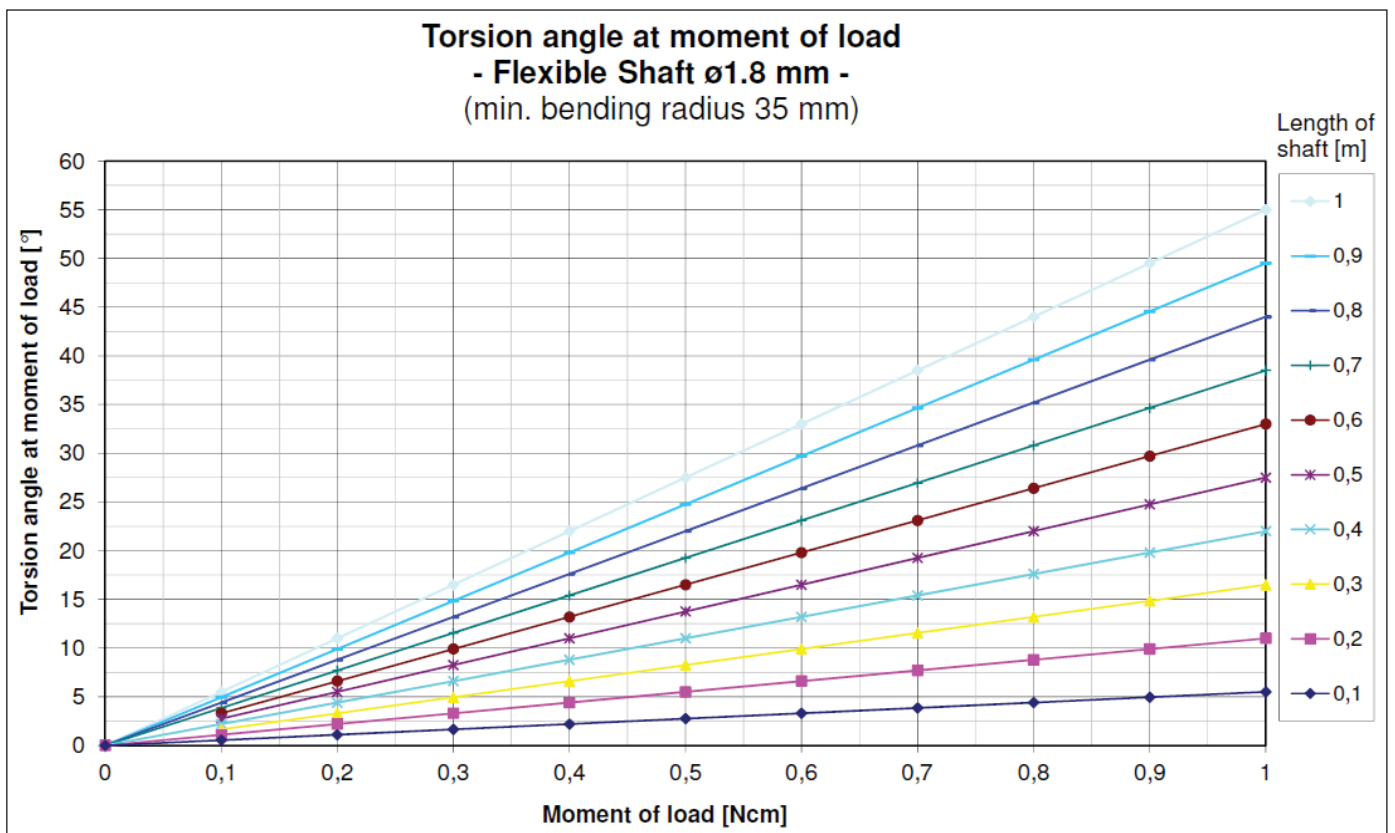

$\varnothing$ [mm]	Min. bending radius [mm]	Max. rotation speed [min ⁻¹]	Torsion angle / constant of torsion stiffness		Break load		Max. torque		Weight per m [kg]
			clockw ise rotation	anticlockw ise rotation	clockw ise rotation	anticlockw ise rotation	clockw ise rotation	anticlockw ise rotation	
1.8	35	50000	550	2500	40	28	12	8	0.015

Further shaft diameter are available on request.
 Individually designed screwing heads in regard to specific customer demands are available on request.

Please contact us for further information.
 Prices and delivery time on request.
 Technical changes possible without prior notification.

Further innovative products can be found on our Homepage and in our Catalog.
 Please note especially our Manual Test Fixtures MA 21xx- and MA 32xx-series.

