



Blocs D' Interfaces



ICT/FCT



High Current

Components made by



CB-S-P-216WW

Interface Block




Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	Wire-Wrap posts
Number of poles:	216
Probes working stroke :	2,6 mm
Air distance:	0,19 mm
Spring force:	237,6 N
Current rating:	4 A
Typical contact resistance:	<10 mΩ
Operating temperature range:	-30° up to +80°

Components specification:	CP945T102B100G CR945-W
---------------------------	---------------------------

Compatible with

Compatible mating part 1:	CB-S-FT-216WW
---------------------------	---------------

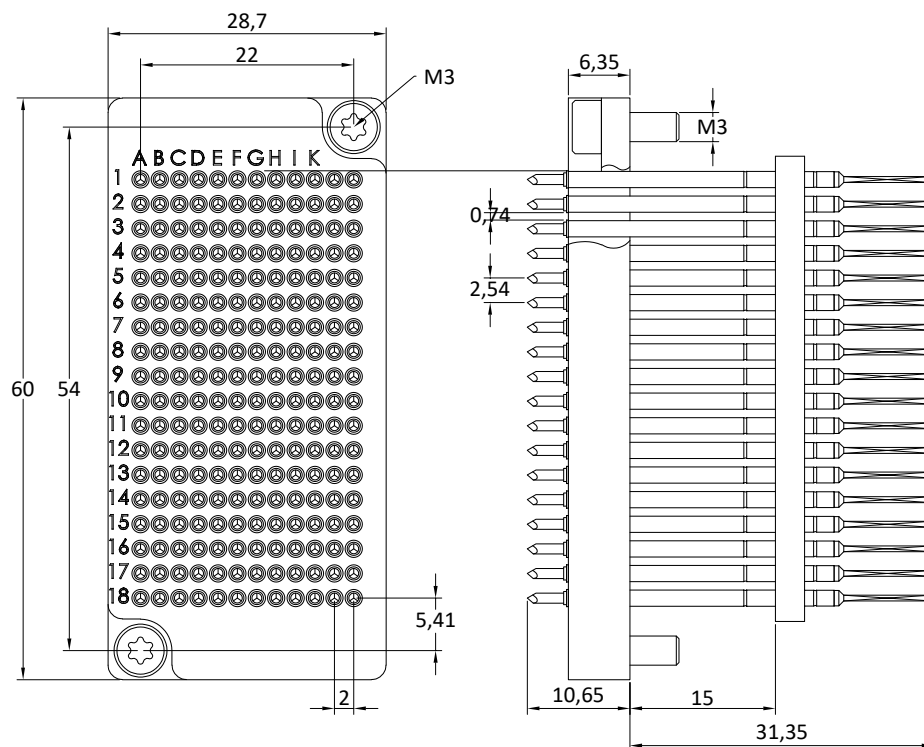


Ordering example:

Series	Type de contact	A wrapper
CB-	S-	P-
		216
		WW
Block type		Nombre de contacts
Signal		

CB-S-FT-216WW

Interface Block

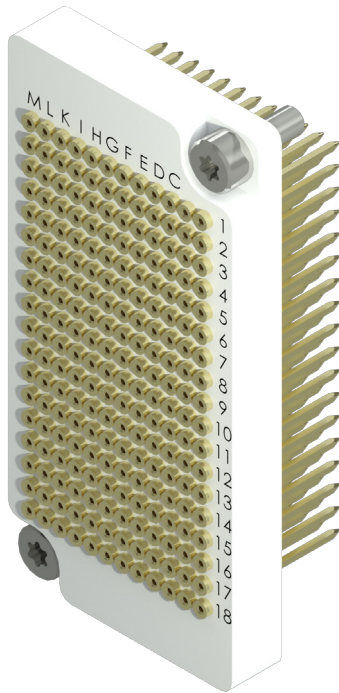


Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	Wire-Wrap posts
Number of poles:	216
Air distance:	0,19 mm
Current rating:	3 A
Typical contact resistance:	<5 mΩ
Operating temperature range:	-30° up to +80°

Components specification:	CF 158/06
---------------------------	-----------

Compatible with

Compatible mating part 1:	CB-S-P-216WW
---------------------------	--------------

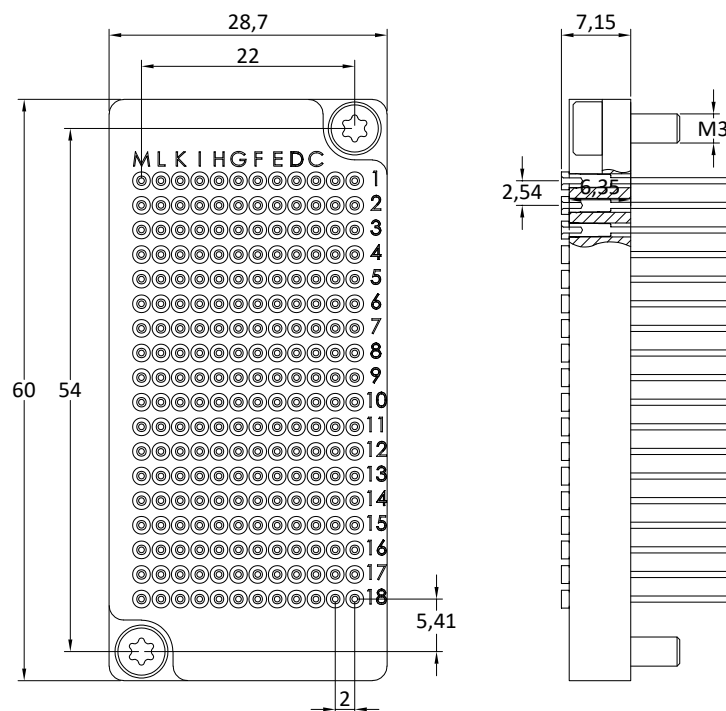

Ordering example:

Series	Pointe côté châssis		Type de contact	A wrapper
CB-	S-	FT-	216	WW
Block type		Nombre de contacts		
Signal				

CB-S-P-170WW

Interface Block





Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	Wire-Wrap posts
Number of poles:	170
Probes working stroke :	2,6 mm
Air distance:	0,64 mm
Spring force:	187 N
Current rating:	4 A
Typical contact resistance:	<10 mΩ
Operating temperature range:	-30° up to +80°

Components specification:	CP945T102B100G CR945-W
---------------------------	---------------------------

Compatible with

Compatible mating part 1:	CB-S-F-170WW
Compatible mating part 2:	CB-S-FT-170WW

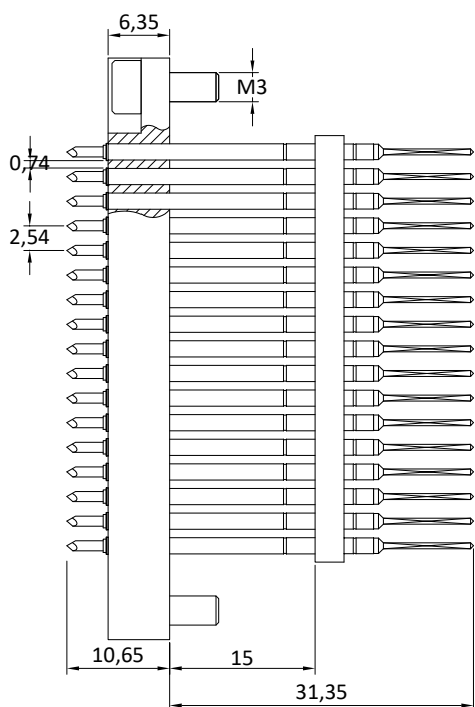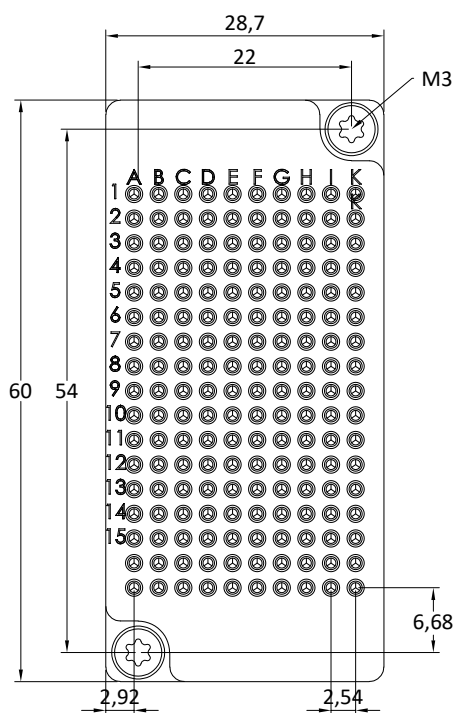

Ordering example:

Pointe côté châssis				
Series	Type de contact		A wrapper	
CB-	S-	P-	170	WW
Block type		Nombre de contacts		
Signal				

CB-HC-P-170WW

Interface Block





Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	Wire-Wrap posts
Number of poles:	170
Probes working stroke :	4 mm
Air distance:	0,34 mm
Spring force:	187 N
Current rating:	4 A
Typical contact resistance:	<10 mΩ
Operating temperature range:	-30° up to +80°
Components specification:	HC118 -2LM175B110G CR112-3

Compatible with

Compatible mating part 1:	CB-S-FT-170WW
---------------------------	---------------

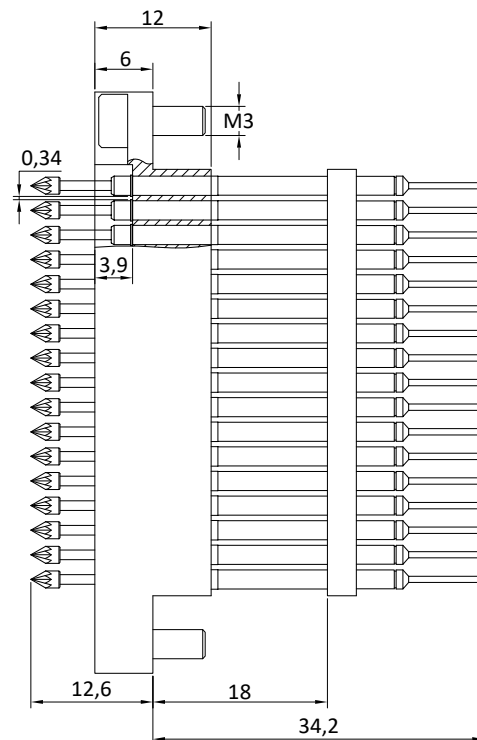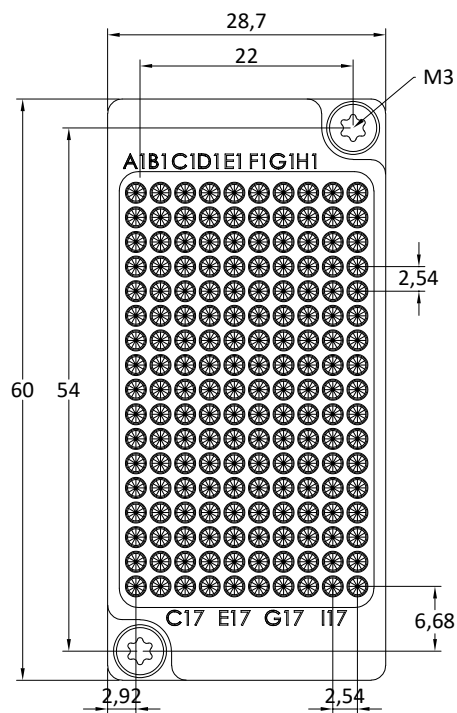

Ordering example:

Pointe côté châssis				
Series	Type de contact		A wrapper	
CB-	HC-	P-	170	WW
Block type		Nombre de contacts		
Hight current				

CB-S-FT-170WW

Interface Block




Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	Wire-Wrap posts
Number of poles:	170
Air distance:	0,64 mm
Current rating:	3 A
Typical contact resistance:	<5 mΩ
Operating temperature range:	-30° up to +80°

Components specification: CF158/06

Compatible with

Compatible mating part 1:	CB-S-P-170WW
Compatible mating part 2:	CB-HC-P-170WW

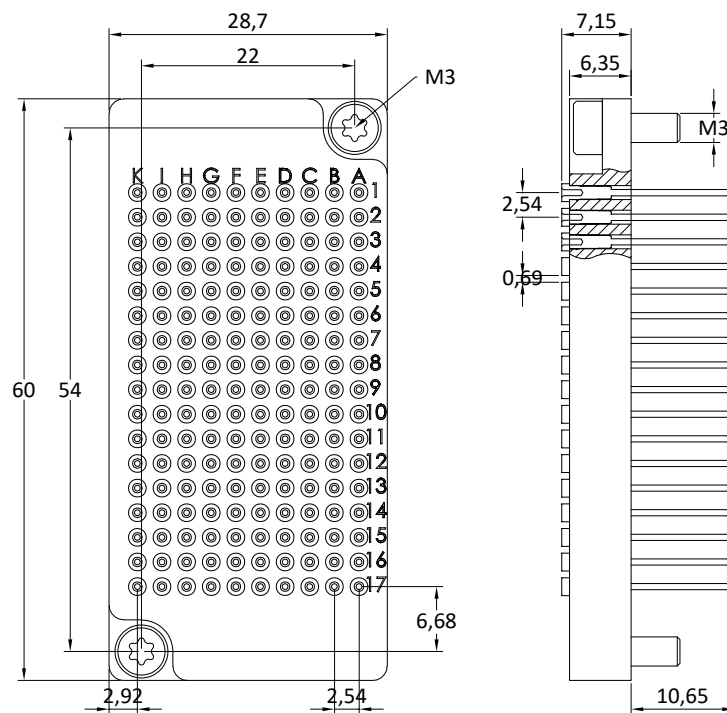


Ordering example:

Pointe côté châssis

Series	Type de contact	A wrapper
CB-	S-	FT-
		170
		WW
Block type		Nombre de contacts
Signal		

CB-SG-P-170WW

Interface Block

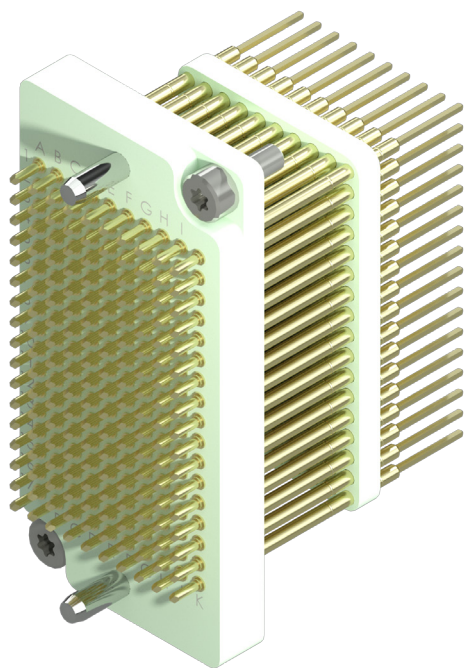


Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	Wire-Wrap posts
Number of poles:	170
Probes working stroke :	2,6 mm
Air distance:	0,64 mm
Spring force:	187 N
Current rating:	4 A
Typical contact resistance:	<10 mΩ
Operating temperature range:	-30° up to +80°

Components specification:	CP945T102B100G CR945-W
---------------------------	---------------------------

Compatible with

Compatible mating part 1:	CB-SG-FT-170WW
---------------------------	----------------

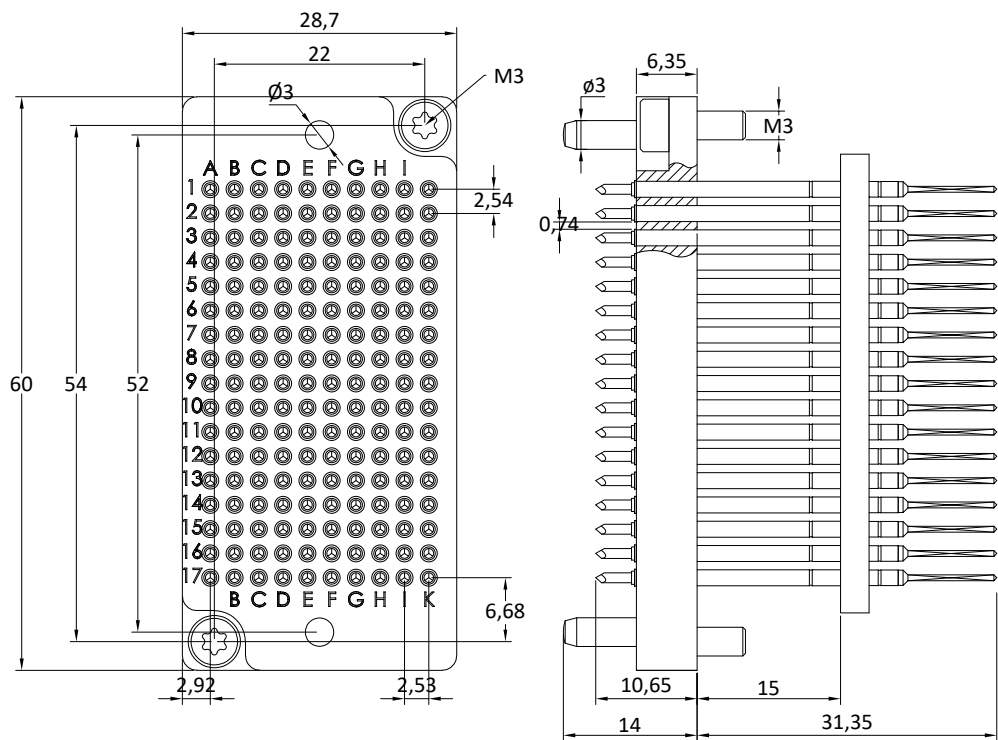

Ordering example:

Series	Type de contact	A wrapper
CB-	SG-	P-
		170
		WW
Block type Signal guidé		Nombre de contacts

CB-HCG-P-170WW

Interface Block




Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	Wire-Wrap posts
Number of poles:	170
Probes working stroke :	4 mm
Air distance:	0,34 mm
Spring force:	187 N
Current rating:	4 A
Typical contact resistance:	<10 mΩ
Operating temperature range:	-30° up to +80°

Components specification:	HC118 -2LM175B110G CR112-3
---------------------------	-------------------------------

Compatible with

Compatible mating part 1:	CB-SG-FT-170WW
---------------------------	----------------

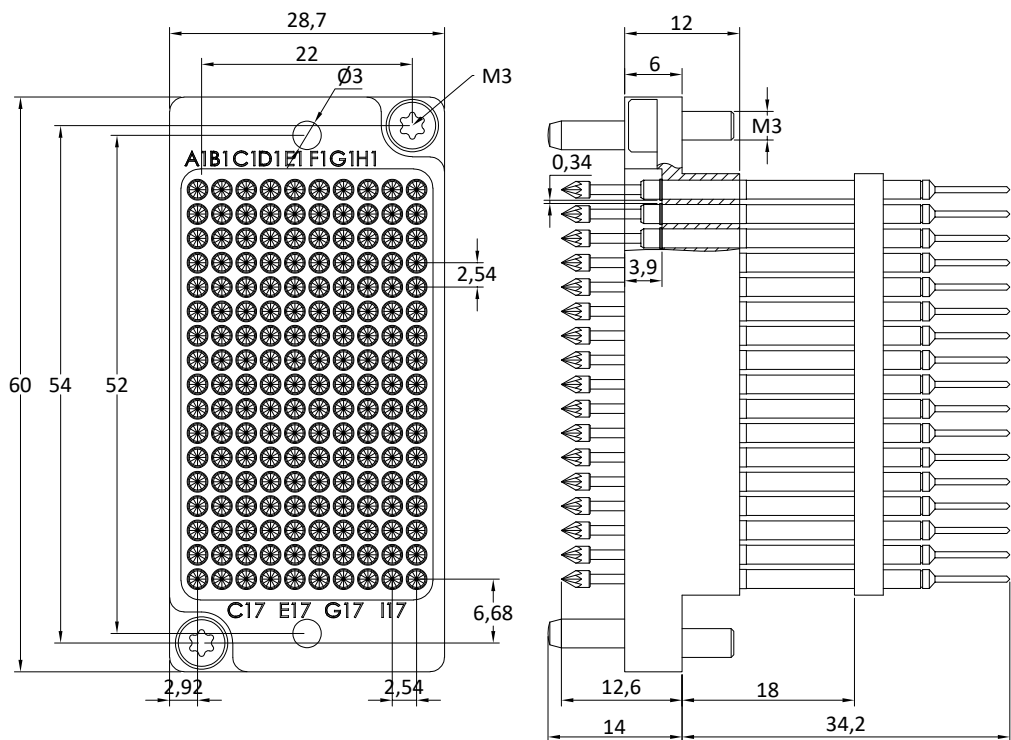


Ordering example:

Series	Type de contact	A wrapper
CB-	HCG- P-	170 WW
Block type	Nombre de contacts	
Hight current guidé		

CB-SG-FT-170WW

Interface Block

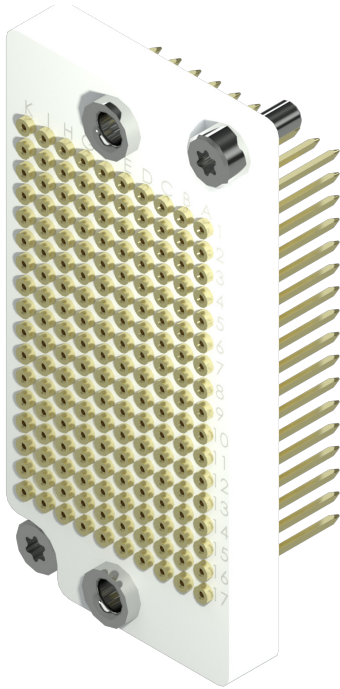


Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	Wire-Wrap posts
Number of poles:	170
Air distance:	0,64 mm
Current rating:	3 A
Typical contact resistance:	<5 mΩ
Operating temperature range:	-30° up to +80°

Components specification:	CF158/06
---------------------------	----------

Compatible with

Compatible mating part 1:	CB-SG-P-170WW
Compatible mating part 2:	CB-HCG-P-170WW

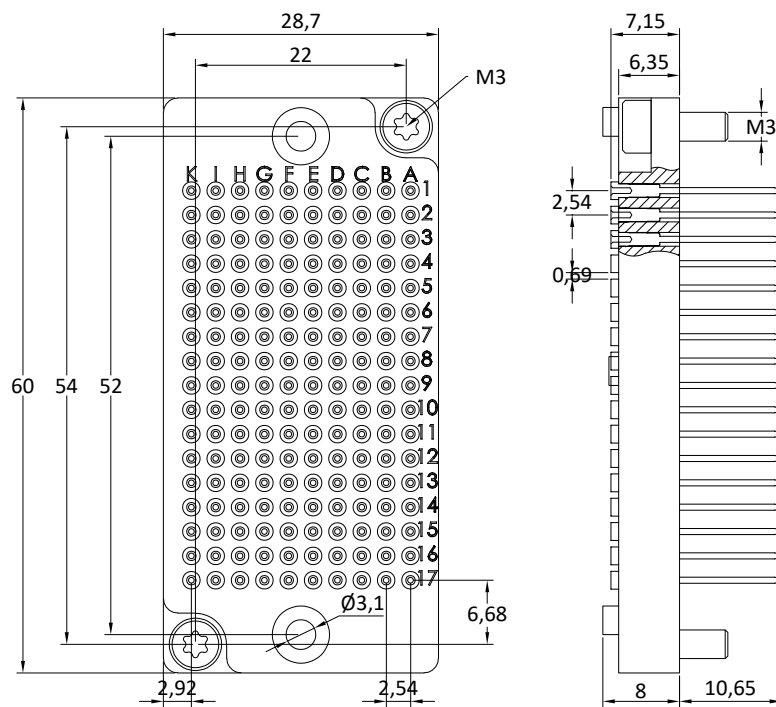

Ordering example:

Pointe côté châssis

Series	Type de contact	A wrapper
CB-	SG-	FT-
170	WW	
Block type Signal guidé		Nombre de contacts

CB-S-P-170RP

Interface Block





Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	Round posts
Number of poles:	170
Probes working stroke :	2,6 mm
Air distance:	0,64 mm
Spring force:	187 N
Current rating:	4 A
Typical contact resistance:	<10 mΩ
Operating temperature range:	-30° up to +80°

Components specification:	CP945T102B100G CR945-RP
---------------------------	----------------------------

Compatible with

Compatible mating part 1:	CB-S-FT-170RP
---------------------------	---------------

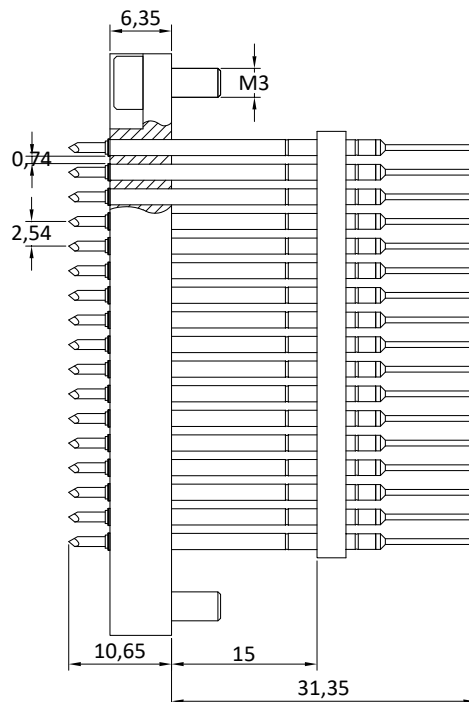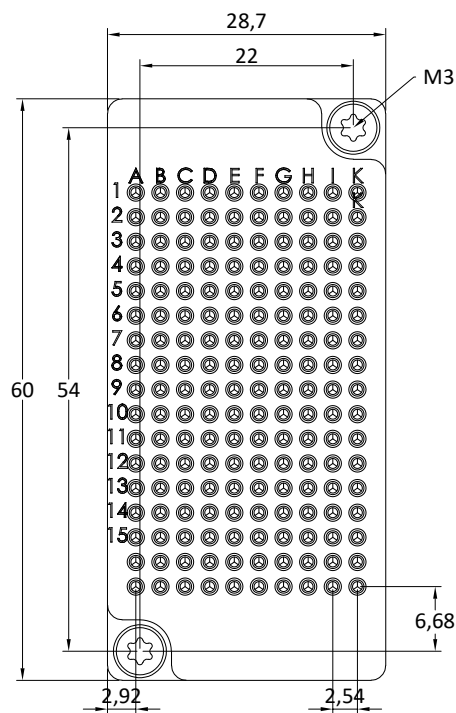

Ordering example:

Pointe côté châssis				
Series	Type de contact		Queue ronde	
CB-	S-	P-	170	RP
Block type		Nombre de contacts		
Signal				

CB-S-FT-170RP

Interface Block

Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	Round posts
Number of poles:	170
Air distance:	0,64 mm
Current rating:	3 A
Typical contact resistance:	<5 mΩ
Operating temperature range:	-30° up to +80°

Components specification:	CF158/06
---------------------------	----------

Compatible with

Compatible mating part 1:	CB-S-P-170RP
---------------------------	--------------

Ordering example:

Series		Type de contact		Queue ronde
CB-		S-	FT- 170	RP
		Block type	Nombre	
		Signal	de contacts	

CB-S-P-136WW

Interface Block




Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	Wire-Wrap posts
Number of poles:	136
Probes working stroke :	2,6 mm
Air distance:	0,64 mm
Spring force:	150 N
Current rating:	4 A
Typical contact resistance:	<10 mΩ
Operating temperature range:	-30° up to +80°

Components specification:	CP945T102B100G
	CR945-W

Compatible with

Compatible mating part 1:	CB-S-FT-136WW
---------------------------	---------------

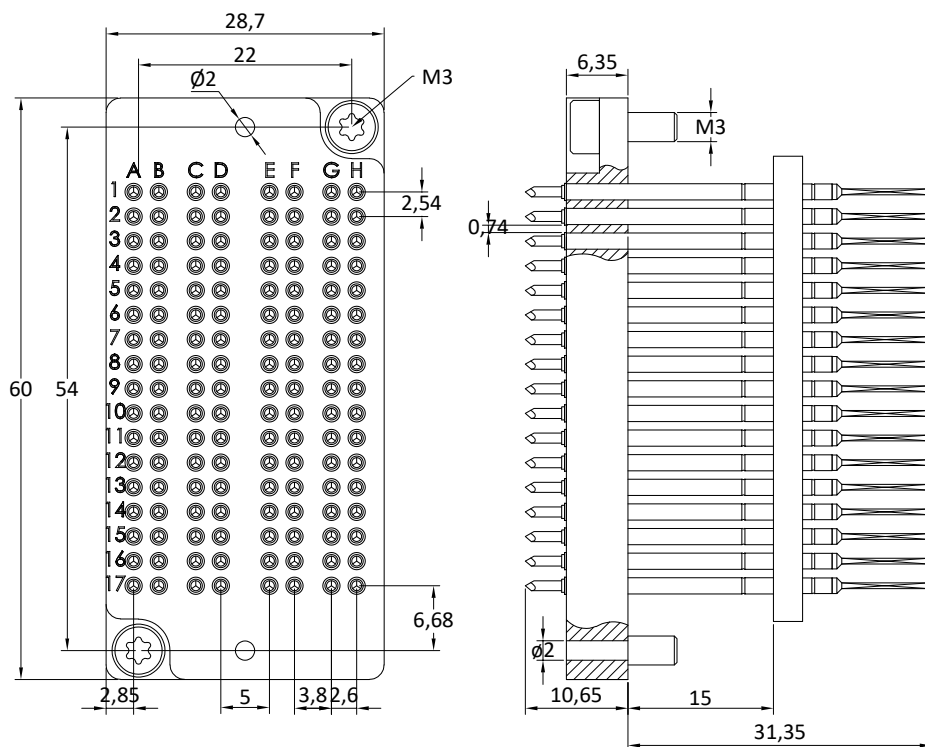

Ordering example:

Series	Type de contact	A wrapper
CB-	S-	P-
		136
		WW
Block type		Nombre de contacts
Signal		

CB-S-FT-136WW

Interface Block




Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	Wire-Wrap posts
Number of poles:	136
Air distance:	0,64 mm
Current rating:	3 A
Typical contact resistance:	<5 mΩ
Operating temperature range:	-30° up to +80°

Components specification:	CF158/06
---------------------------	----------

Compatible with

Compatible mating part 1:	CB-S-P-136WW
---------------------------	--------------

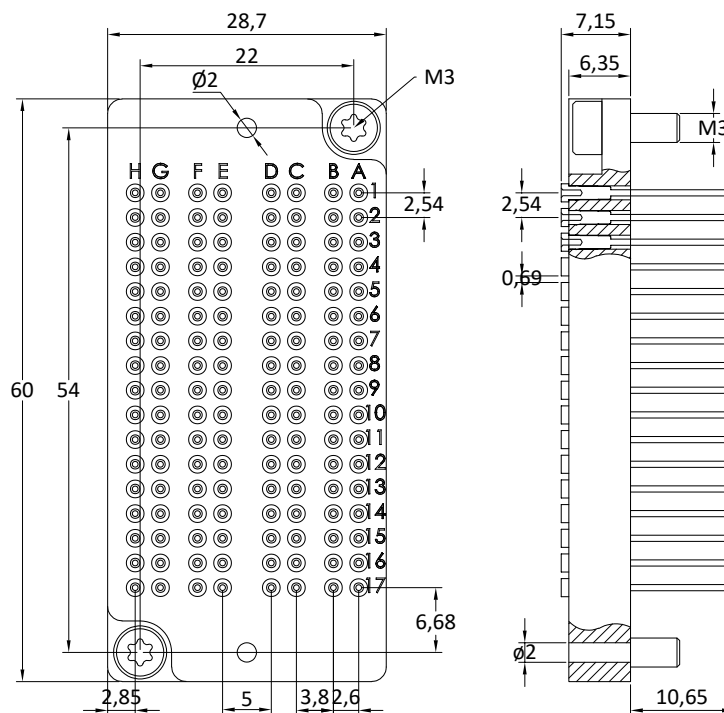

Ordering example:

Pointe côté châssis

Series	Type de contact	A wrapper
CB-	S-	FT-
136	WW	
Block type Signal	Nombre de contacts	

CB-SG-P-136WW

Interface Block




Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	Wire-Wrap posts
Number of poles:	136
Probes working stroke :	2,6 mm
Air distance:	0,64 mm
Spring force:	150 N
Current rating:	4 A
Typical contact resistance:	<10 mΩ
Operating temperature range:	-30° up to +80°

Components specification:	CP945T102B100G CR945-W
---------------------------	---------------------------

Compatible with

Compatible mating part 1:	CB-S-FT-136WW
---------------------------	---------------

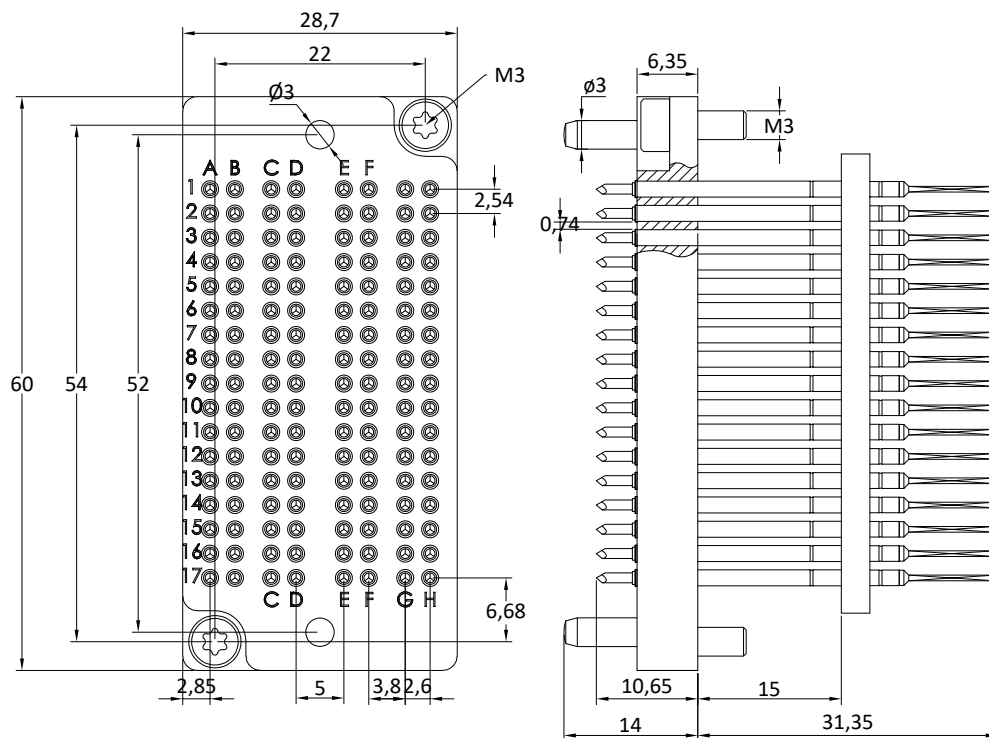

Ordering example:

Series	Type de contact	A wrapper
CB-	SG-	P-
136	WW	
Block type Signal guidé	Nombre de contacts	

CB-SG-FT-136WW

Interface Block




Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	Wire-Wrap posts
Number of poles:	136
Air distance:	0,64 mm
Current rating:	3 A
Typical contact resistance:	<5 mΩ
Operating temperature range:	-30° up to +80°

Components specification:	CF158/06
---------------------------	----------

Compatible with

Compatible mating part 1:	CB-SG-P-136WW
---------------------------	---------------

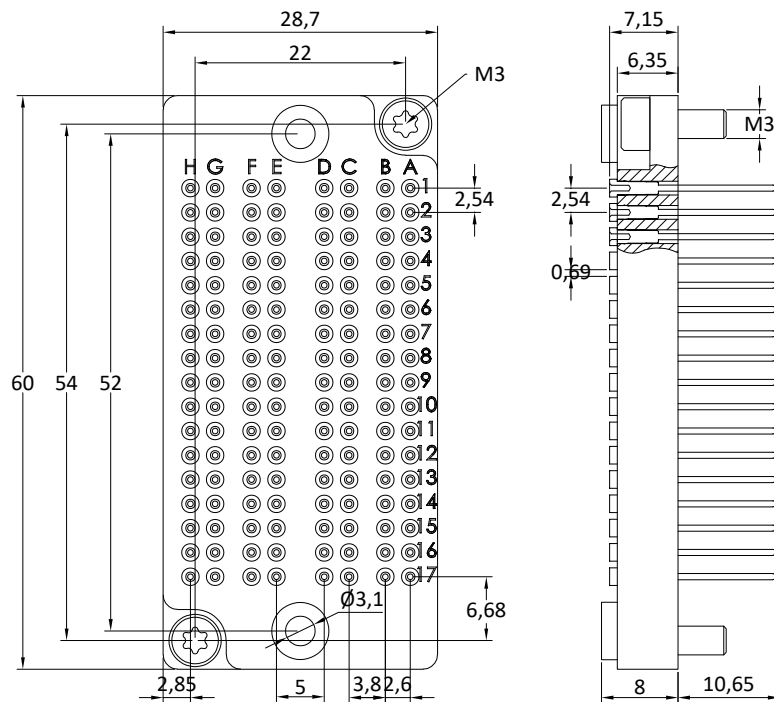


Ordering example:

Pointe côté châssis

Series	Type de contact	A wrapper
CB-	SG-	FT-
136	WW	
Block type Signal guidé	Nombre de contacts	

CB-S-P-085WW

Interface Block

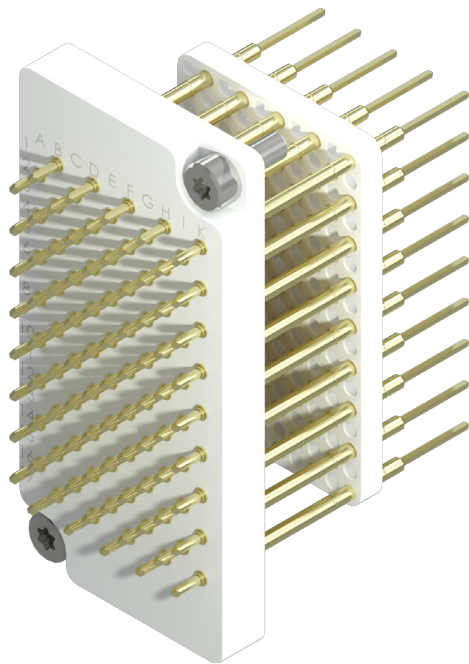


Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	Wire-Wrap posts
Number of poles:	85
Probes working stroke :	2,6 mm
Air distance:	1,69 mm
Spring force:	93,5 N
Current rating:	4 A
Typical contact resistance:	<10 mΩ
Operating temperature range:	-30° up to +80°

Components specification: CP945T102B100G
CR945-W

Compatible with

Compatible mating part 1: CB-S-FT-085WW

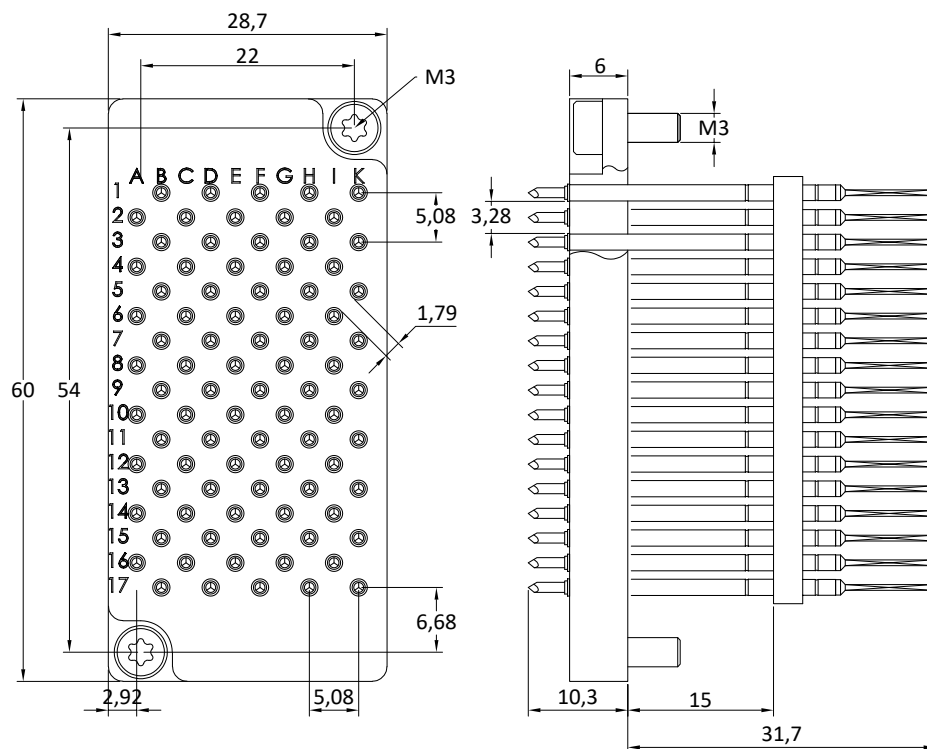

Ordering example:

Pointe côté châssis				
Series	Type de contact		A wrapper	
CB-	S-	P-	085	WW
Block type		Nombre de contacts		
Signal				

CB-S-FT-085WW

Interface Block




Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	Wire-Wrap posts
Number of poles:	85
Air distance:	1,69 mm
Current rating:	3 A
Typical contact resistance:	<5 mΩ
Operating temperature range:	-30° up to +80°

Components specification: CF158/06

Compatible with

Compatible mating part 1: CB-S-P-085WW

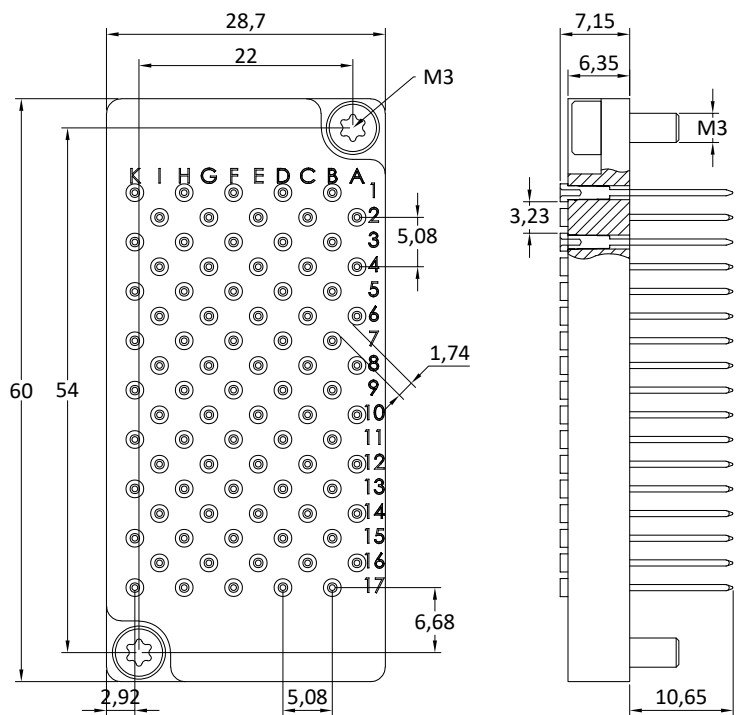

Ordering example:

Pointe côté châssis

Series	Type de contact	A wrapper
CB-	S-	FT-
		085
		WW
	Block type Signal	Nombre de contacts

CB-SG-P-085WW

Interface Block




Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	Wire-Wrap posts
Number of poles:	85
Probes working stroke :	2,6 mm
Air distance:	1,69 mm
Spring force:	93,5 N
Current rating:	4 A
Typical contact resistance:	<10 mΩ
Operating temperature range:	-30° up to +80°

Components specification:	CP945T102B100G
	CR945-W

Compatible with

Compatible mating part 1:	CB-S-FT-085WW
---------------------------	---------------

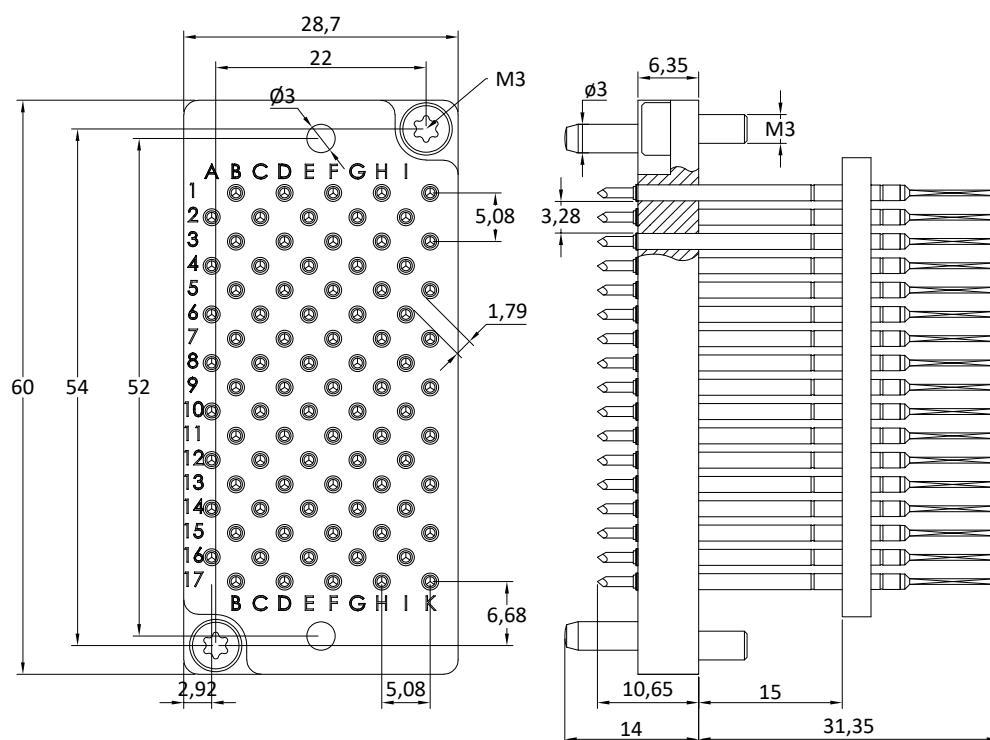

Ordering example:

Series	Block type	Type de contact	Signal guidé	A wrapper	Nombre de contacts
CB-	SG-	P-	085	WW	

CB-SG-FT-085WW

Interface Block




Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	Wire-Wrap posts
Number of poles:	85
Air distance:	1,69 mm
Current rating:	3 A
Typical contact resistance:	<5 mΩ
Operating temperature range:	-30° up to +80°

Components specification:	CF158/06
---------------------------	----------

Compatible with

Compatible mating part 1:	CB-SG-P-085WW
---------------------------	---------------

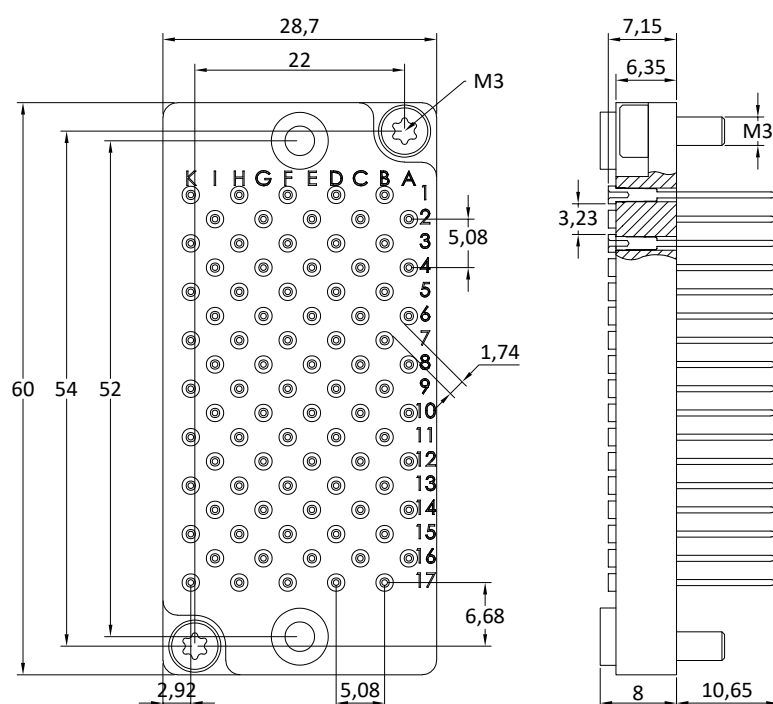

Ordering example:

Pointe côté châssis

Series	Type de contact	A wrapper
CB-	SG-	FT-
085	WW	
Block type Signal guidé	Nombre de contacts	

CB-HC-P-045SC

Interface Block

Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	Solder cup
Number of poles:	45
Probes working stroke :	4 mm
Air distance:	1,48 mm
Spring force:	67,5 N
Current rating:	30 A
Typical contact resistance:	<10 mΩ
Operating temperature range:	-30° up to +120°
Components specification:	HC150M LM 300 B 150 G CR150M-MR

Compatible with


Compatible mating part 1:	CB-HC-FT-045SC
---------------------------	----------------

Ordering example:

		Pointe côté châssis					
Series	Type de contact		A souder				
CB-	HC-	P-	045	SC			
		Block type	Nombre				
		Hight current	de contacts				

CB-HC-FT-045SC

Interface Block

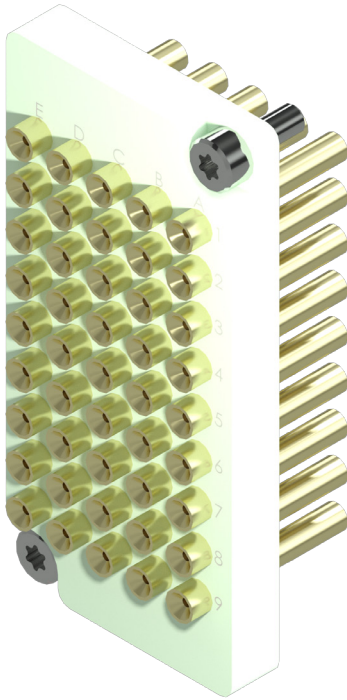


Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	Solder cup
Number of poles:	45
Air distance:	1,48 mm
Current rating:	30 A
Typical contact resistance:	<5 mΩ
Operating temperature range:	-30° up to +120°

Components specification: CF120S02F

Compatible with

Compatible mating part 1: CB-HC-P-045SC

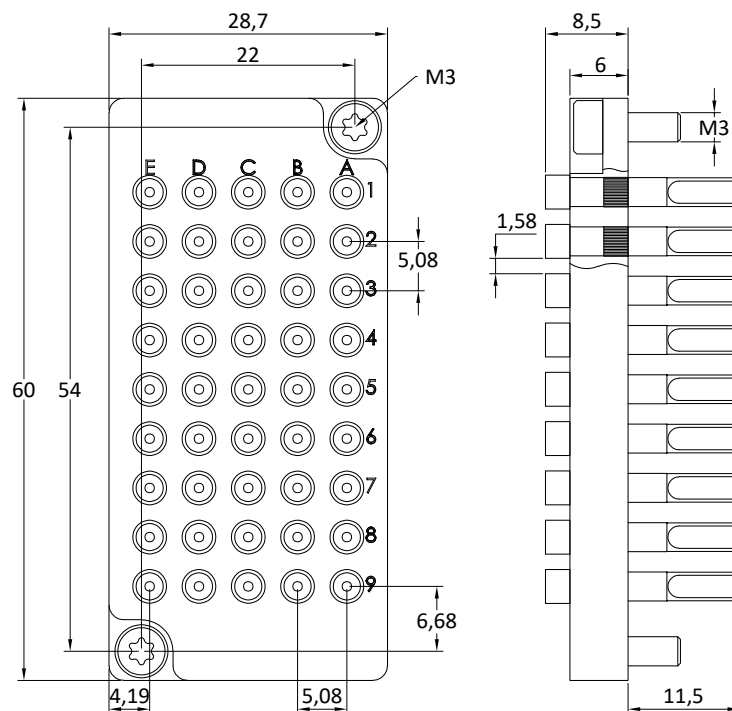

Ordering example:

Series	Pointe côté châssis		Type de contact	A souder
CB-	HC-	FT-	045	SC
Block type		Nombre de contacts		
Hight current				

CB-HCG-P-045SC

Interface Block

Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	Solder cup
Number of poles:	45
Probes working stroke :	4 mm
Air distance:	1,48 mm
Spring force:	67,5 N
Current rating:	30 A
Typical contact resistance:	<10 mΩ
Operating temperature range:	-30° up to +120°
Components specification:	HC120M LM 300 B 150 G CR113M-2R

Compatible with


Compatible mating part 1:	CB-HCG-FT-045SC
---------------------------	-----------------

Ordering example:

Pointe côté châssis				
Series	Type de contact	A souder		
CB-	HCG-	P-	045	SC
Block type		Nombre de contacts		
Hight current guidé				

CB-HCG-FT-045SC

Interface Block

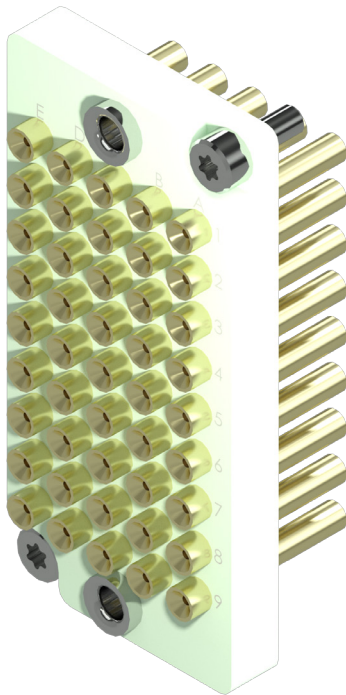


Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	Solder cup
Number of poles:	45
Air distance:	1,48 mm
Current rating:	30 A
Typical contact resistance:	<5 mΩ
Operating temperature range:	-30° up to +120°

Components specification:	CF120S02F
---------------------------	-----------

Compatible with

Compatible mating part 1:	CB-HCG-P-045SC
---------------------------	----------------

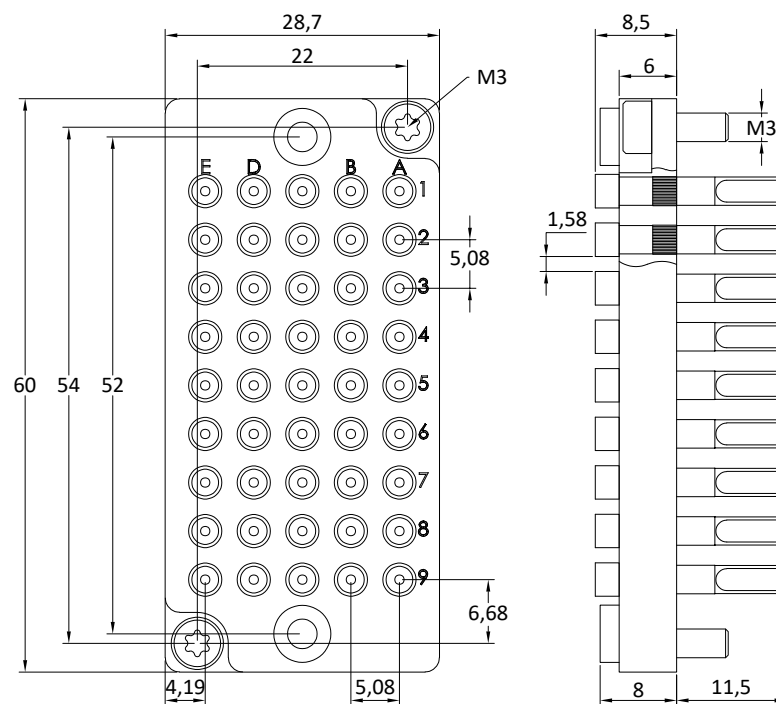


Ordering example:

Series	Type de contact	A souder
CB- HCG- FT- 045	SC	
Block type Hight current guidé	Nombre de contacts	

CB-HC-P-040WW

Interface Block

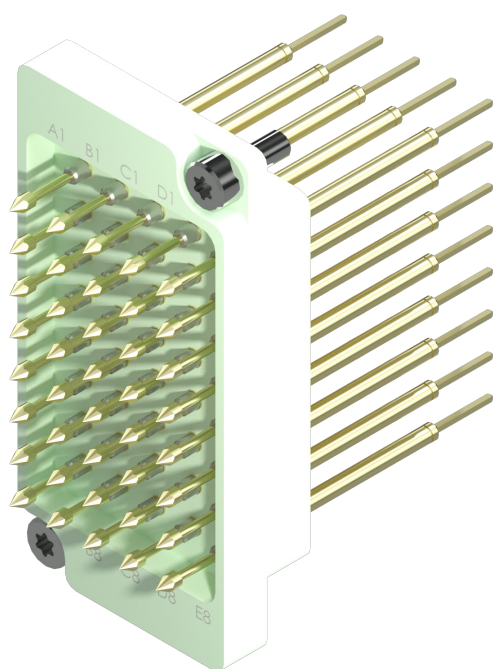


Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	Wire-Wrap posts
Number of poles:	40
Probes working stroke :	4 mm
Air distance:	2,88 mm
Spring force:	44 N
Current rating:	4 A
Typical contact resistance:	<10 mΩ
Operating temperature range:	-30° up to +80°

Components specification:	HC118 -2LM175B110G
	CR112-3

Compatible with

Compatible mating part 1:	CB-S-FT-040WW
---------------------------	---------------

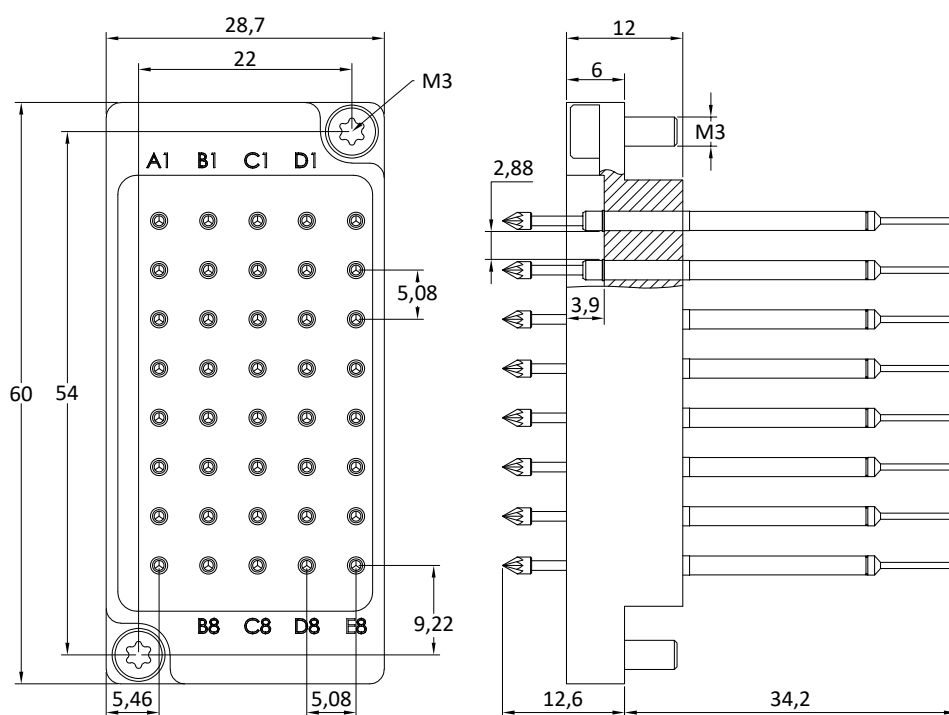


Ordering example:

Pointe côté châssis				
Series	Type de contact		A wrapper	
CB-	HC-	P-	040	WW
Block type		Nombre de contacts		
Hight current				

CB-S-FT-040WW

Interface Block

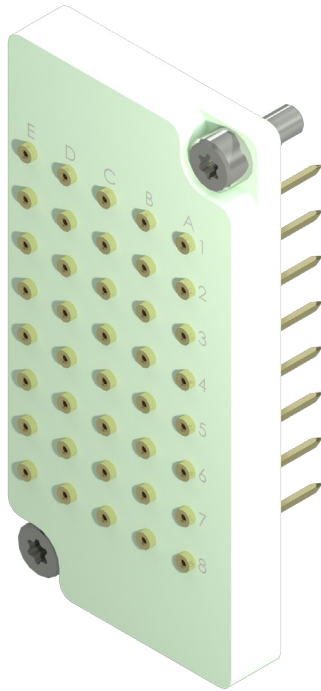


Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	Wire-Wrap posts
Number of poles:	40
Air distance:	3,18 mm
Current rating:	3 A
Typical contact resistance:	<5 mΩ
Operating temperature range:	-30° up to +80°

Components specification: CF158/06

Compatible with

Compatible mating part 1:	CB-S-P-040WW
Compatible mating part 2:	CB-HC-P-040WW

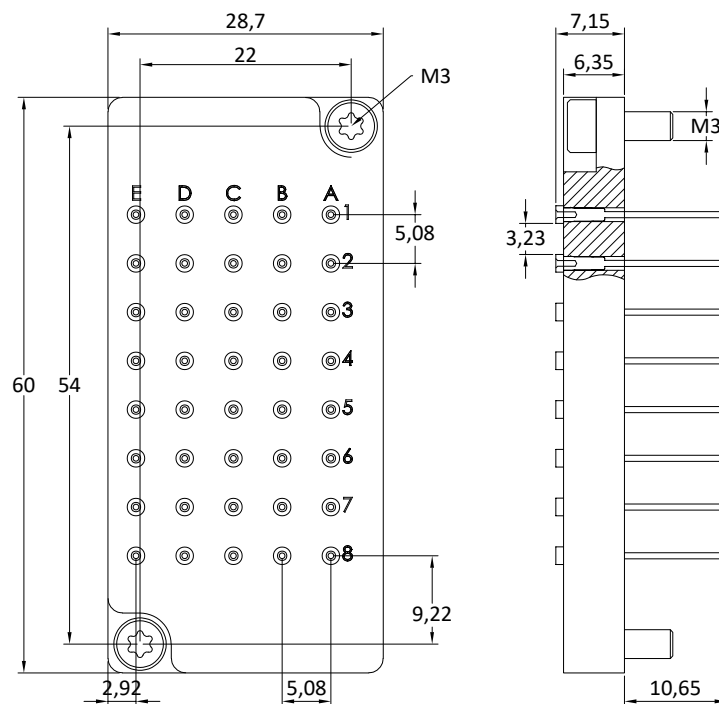


Ordering example:

Pointe côté châssis

Series	Type de contact	A wrapper
CB-	S-	FT-
		040
		WW
	Block type	Nombre de contacts
	Signal	

CB-SG-P-040WW

Interface Block

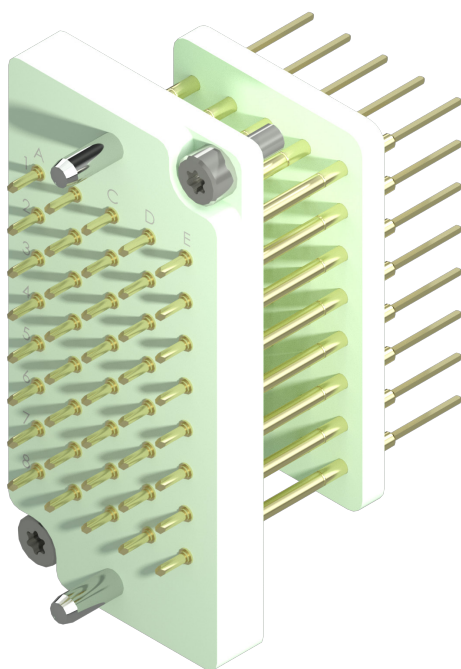


Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	Wire-Wrap posts
Number of poles:	40
Probes working stroke :	2,6 mm
Air distance:	3,18 mm
Spring force:	44 N
Current rating:	4 A
Typical contact resistance:	<10 mΩ
Operating temperature range:	-30° up to +80°

Components specification:	CP945T102B100G CR945-W
---------------------------	---------------------------

Compatible with

Compatible mating part 1:	CB-SG-FT-040WW
---------------------------	----------------

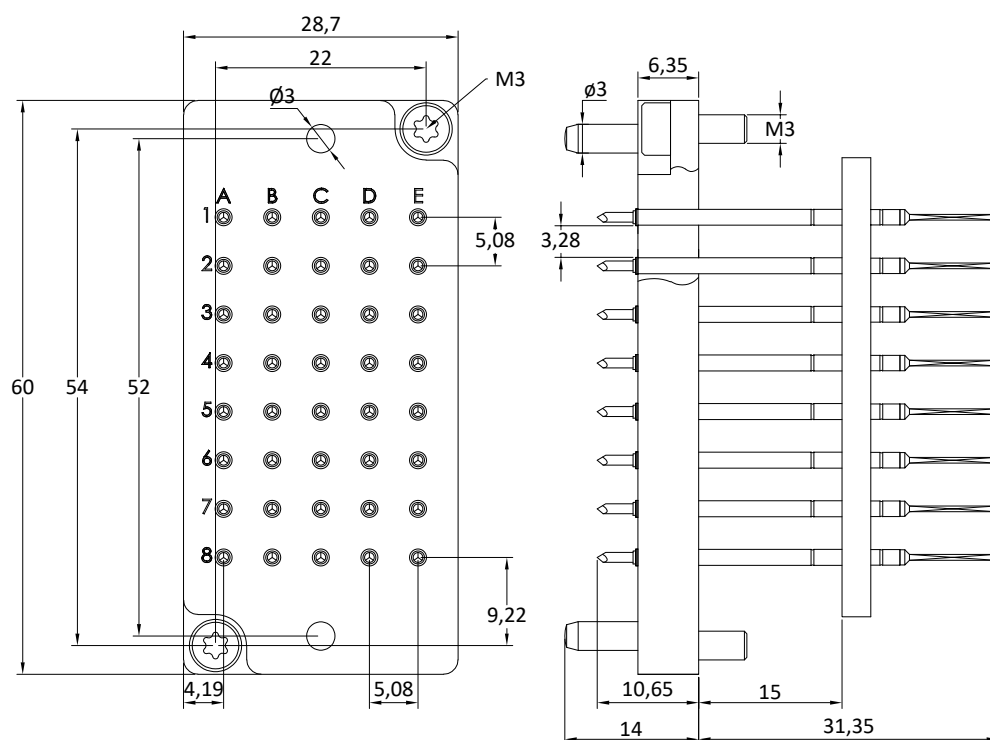


Ordering example:

Series	Pointe côté châssis	Type de contact	A wrapper
CB-	SG-	P-	040 WW
Block type Signal guidé		Nombre de contacts	

CB-HCG-P-040WW

Interface Block

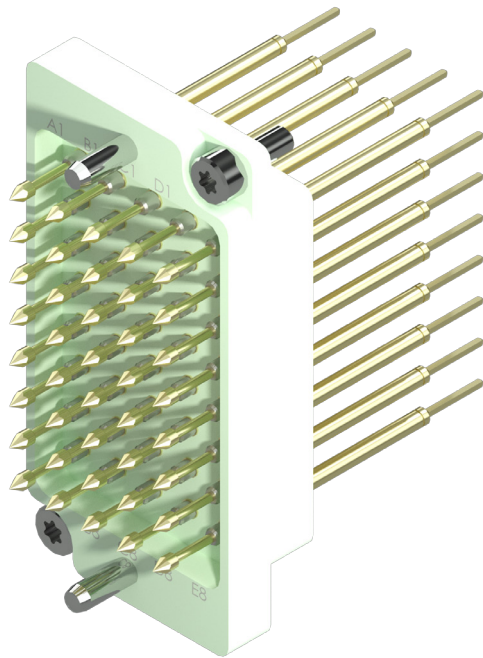


Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	Wire-Wrap posts
Number of poles:	40
Probes working stroke :	4 mm
Air distance:	2,88 mm
Spring force:	44 N
Current rating:	4 A
Typical contact resistance:	<10 mΩ
Operating temperature range:	-30° up to +80°
Components specification:	HC118 -2LM175B110G CR112-3

Compatible with

Compatible mating part 1:	CB-SG-FT-040WW
---------------------------	----------------

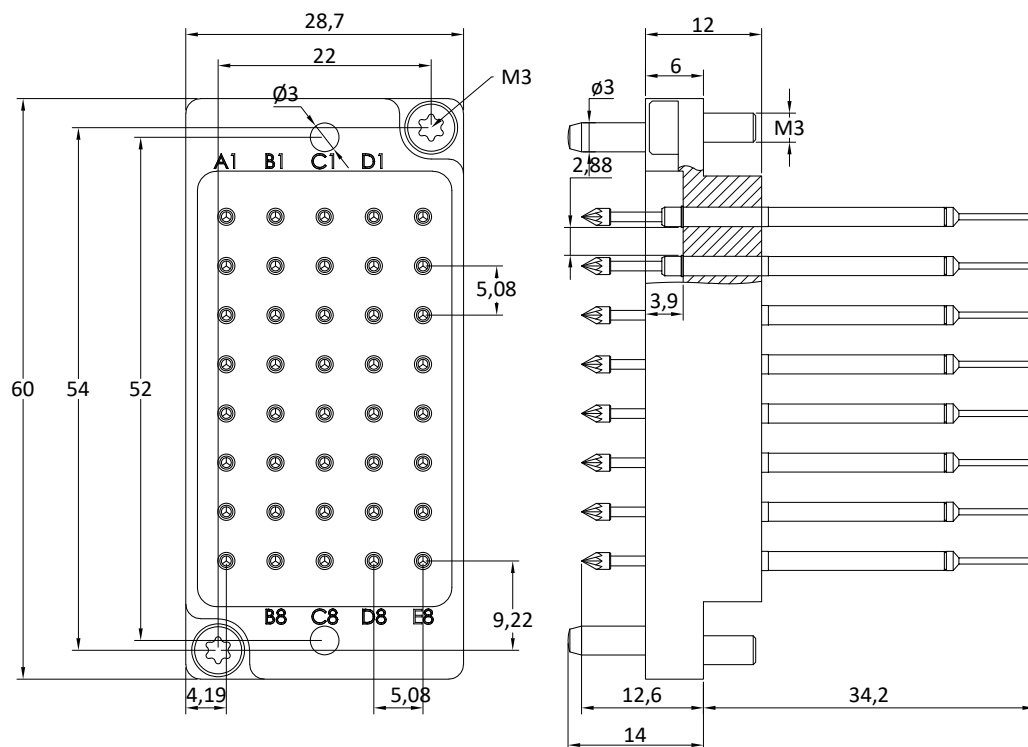


Ordering example:

Series	Type de contact	A wrapper
CB-	HCG- P-	040 WW
Block type Hight current guidé		Nombre de contacts

CB-SG-FT-040WW

Interface Block

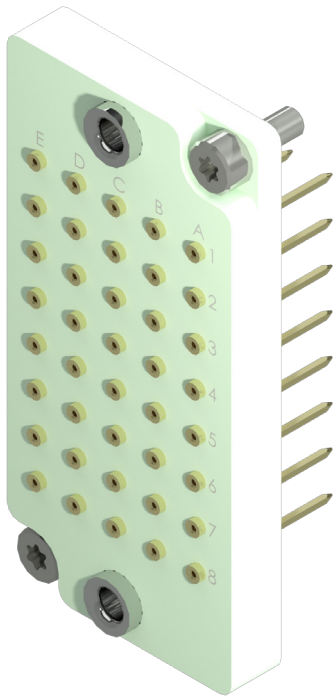


Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	Wire-Wrap posts
Number of poles:	40
Air distance:	3,18 mm
Current rating:	3 A
Typical contact resistance:	<5 mΩ
Operating temperature range:	-30° up to +80°

Components specification: CF158/06

Compatible with

Compatible mating part 1:	CB-SG-P-040WW
Compatible mating part 2:	CB-HCG-P-040WW

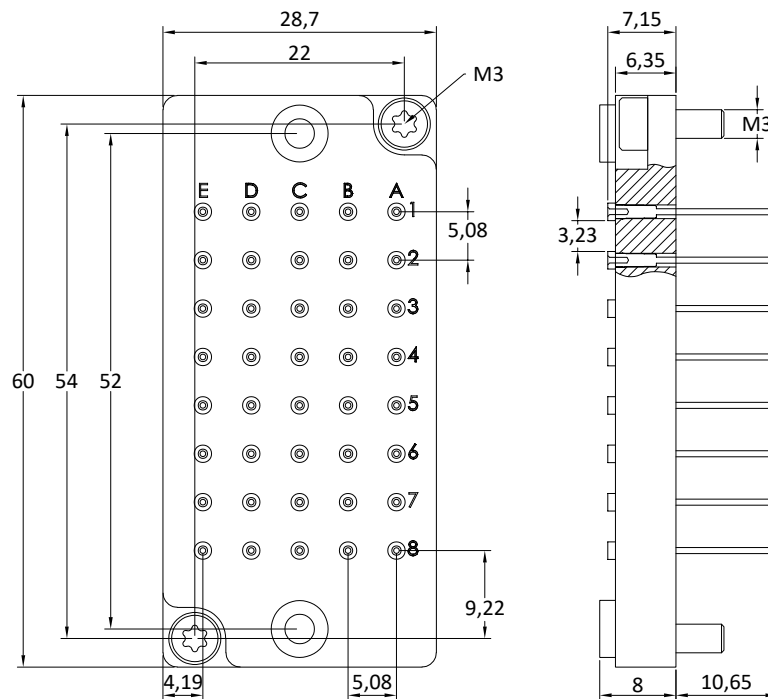

Ordering example:

Pointe côté châssis

Series	Type de contact		A wrapper	
CB-	SG-	FT-	040	WW
Block type Signal guidé		Nombre de contacts		

CB-HC-P-034SC

Interface Block

Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	Solder cup
Number of poles:	34
Probes working stroke :	4 mm
Air distance:	3 mm
Spring force:	51 N
Current rating:	20 A
Typical contact resistance:	<10 mΩ
Operating temperature range:	-30° up to +120°

Components specification: HCP 912M-2 B13 175 150 G
HCR 912MSZ

Compatible with


Compatible mating part 1: CB-HC-FT-034SC

Ordering example:

Series		Type de contact		A souder
CB-		HC- P-		SC
Block type		Nombre		
Hight current		de contacts		

CB-HC-FT-034SC

Interface Block

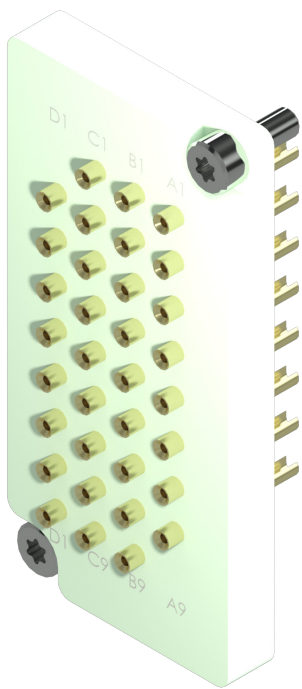


Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	Solder cup
Number of poles:	34
Air distance:	3 mm
Current rating:	20 A
Typical contact resistance:	<5 mΩ
Operating temperature range:	-30° up to +120°

Components specification: CF254/2AB215-2

Compatible with

Compatible mating part 1: CB-HC-P-034SC

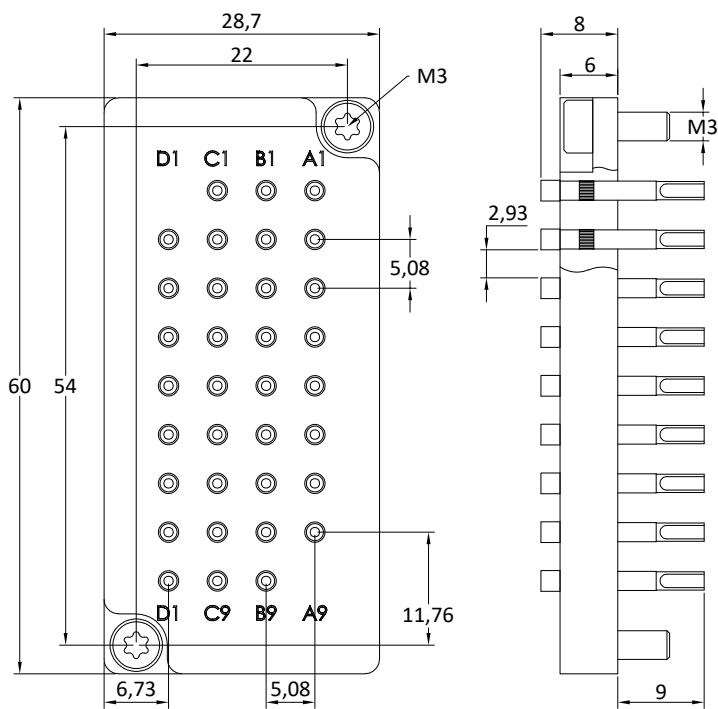

Ordering example:

Pointe côté châssis

Series	Type de contact	A souder
CB-	HC-	FT-
034	SC	
Block type Hight Current		Nombre de contacts

CB-HC-P-024SC

Interface Block

Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	Solder cup
Number of poles:	24
Probes working stroke :	4 mm
Air distance:	2,4 mm
Spring force:	52,8 N
Current rating:	30 A
Typical contact resistance:	<10 mΩ
Operating temperature range:	-30° up to +120°

Components specification:	HC120M LM 300 B 220 G CR113M-2R
---------------------------	------------------------------------

Compatible with


Compatible mating part 1:	CB-HC-FT-024SC
---------------------------	----------------

Ordering example:

Series		Type de contact		A souder
CB- HC-		P-	024	SC
Block type Hight current		Nombre de contacts		

CB-HC-FT-024SC

Interface Block

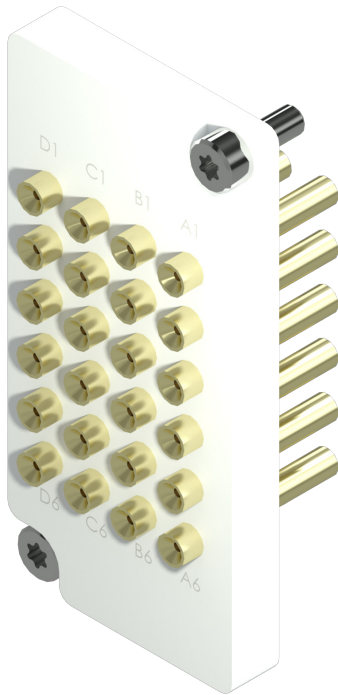


Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	Solder cup
Number of poles:	24
Air distance:	2,4 mm
Current rating:	30 A
Typical contact resistance:	<5 mΩ
Operating temperature range:	-30° up to +120°

Components specification:	CF120S02F
---------------------------	-----------

Compatible with

Compatible mating part 1:	CB-HC-P-024SC
---------------------------	---------------

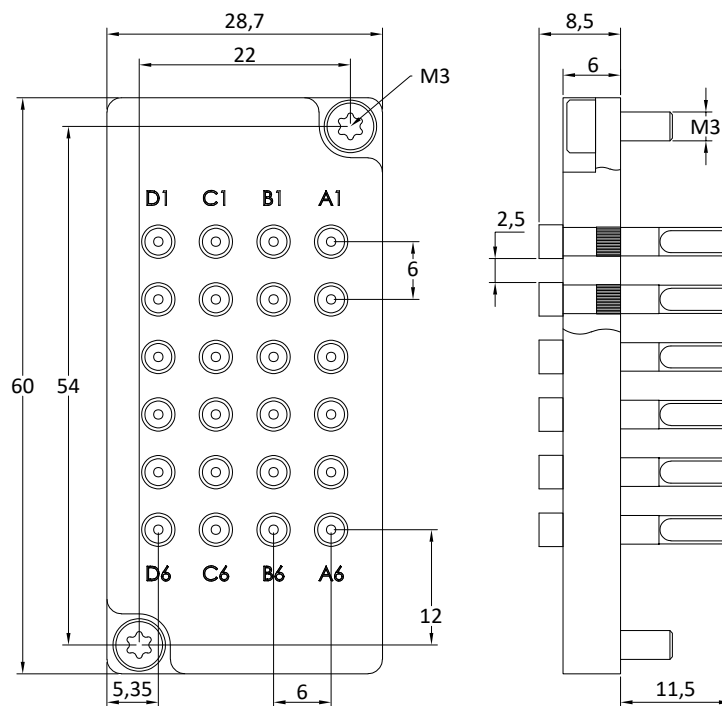

Ordering example:

Pointe côté châssis				
Series	Type de contact		A souder	
CB-	HC-	FT-	024	SC
Block type Hight current		Nombre de contacts		

CB-HCG-P-024SC

Interface Block

Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	Solder cup
Number of poles:	24
Probes working stroke :	4 mm
Air distance:	2,4 mm
Spring force:	52,8 N
Current rating:	30 A
Typical contact resistance:	<10 mΩ
Operating temperature range:	-30° up to +120°
Components specification:	HC120M LM 300 B 220 G CR113M-2R

Compatible with


Compatible mating part 1:	CB-HCG-FT-024SC
---------------------------	-----------------

Ordering example:

Series		Type de contact		A souder
CB-	HC-	P-	045	SC
Block type Hight current		Nombre de contacts		

CB-HCG-FT-024SC

Interface Block

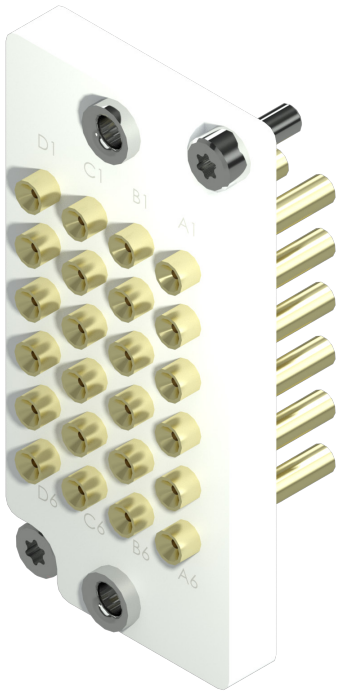


Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	Solder cup
Number of poles:	24
Air distance:	2,4 mm
Current rating:	30 A
Typical contact resistance:	<5 mΩ
Operating temperature range:	-30° up to +120°

Components specification:	CF120S02F
---------------------------	-----------

Compatible with

Compatible mating part 1:	CB-HCG-P-024SC
---------------------------	----------------

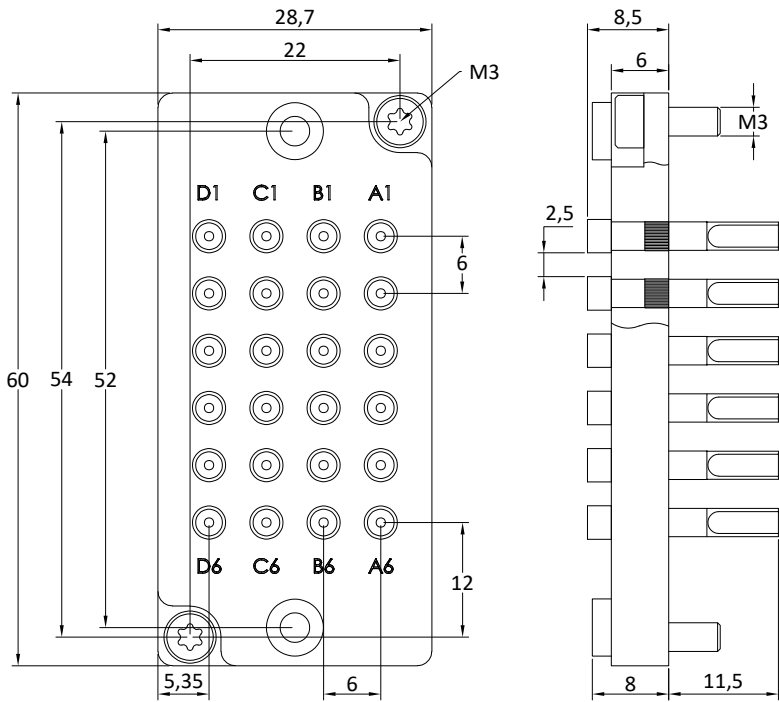

Ordering example:

Series	Type de contact	A souder
CB- HCG- FT- 024 SC		
Block type Hight current guidé	Nombre de contacts	

CB-HC-P-008M3

Interface Block

Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	M3
Number of poles:	8
Probes working stroke :	4,4 mm
Air distance:	7 mm
Spring force:	40 N
Current rating:	50 A
Typical contact resistance:	<10 mΩ
Operating temperature range:	-30° up to +120°
Components specification:	HC 150M LM 300 B 500 G CR 150M-MR

Compatible with


Compatible mating part 1:	CB-HC-FT-008M3
---------------------------	----------------

Ordering example:

Series		Type de contact		A visser
CB-		HC- P-		M3
		Block type Hight current	008 Nombre de contacts	

CB-HC-FT-008M3

Interface Block

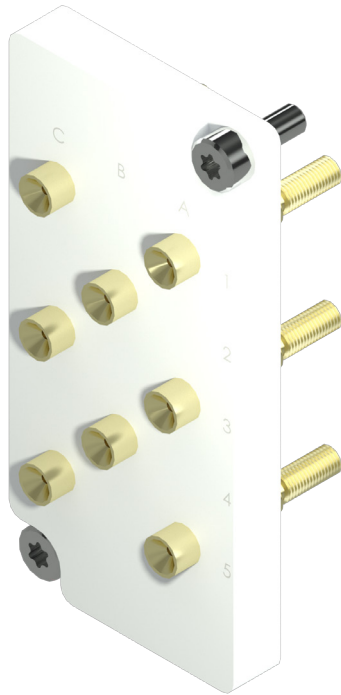


Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	M3
Number of poles:	8
Air distance:	7 mm
Current rating:	50 A
Typical contact resistance:	<5 mΩ
Operating temperature range:	-30° up to +120°

Components specification: CF150/3A430-M3

Compatible with

Compatible mating part 1: CB-HC-P-008SC

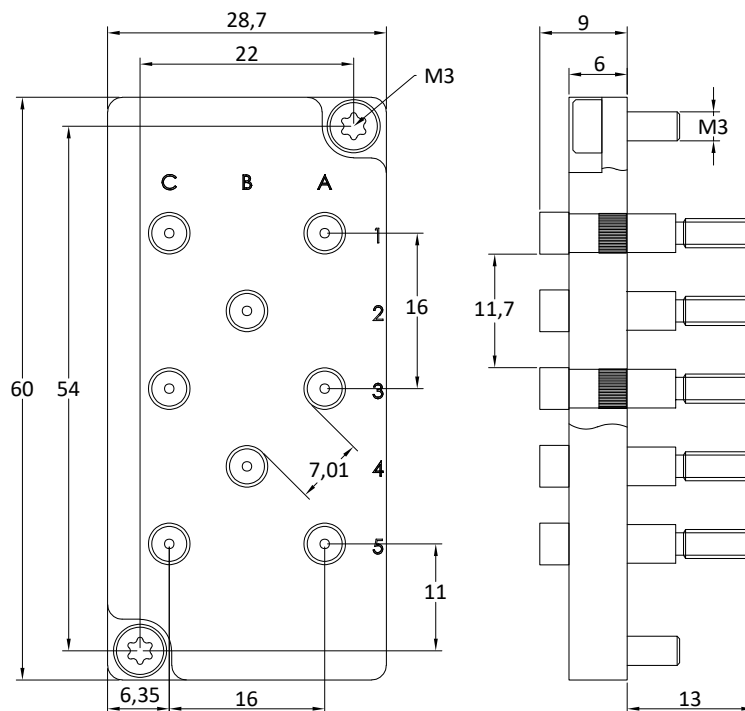

Ordering example:

Pointe côté châssis				
Series	Type de contact			A visser
CB-	HC-	FT-	008	M3
Block type Hight current			Nombre de contacts	

CB-HC-P-004M3

Interface Block

Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	M3
Number of poles:	4
Probes working stroke :	4,4 mm
Air distance:	9,1 mm
Spring force:	20 N
Current rating:	50 A
Typical contact resistance:	<10 mΩ
Operating temperature range:	-30° up to +120°

Components specification:	HC 150M LM 300 B 500 G CR 150M-MR
---------------------------	--------------------------------------

Compatible with

Compatible mating part 1:	CB-HC-FT-004M3
---------------------------	----------------

Ordering example:

Series		Type de contact		A visser
CB-		HC-		M3
		P-	004	
		Block type Hight current		Nombre de contacts

CB-HC-FT-004M3

Interface Block




Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	M3
Number of poles:	4
Air distance:	9,1 mm
Current rating:	50 A
Typical contact resistance:	<5 mΩ
Operating temperature range:	-30° up to +120°

Components specification: CF150/3A430-M3

Compatible with

Compatible mating part 1: CB-HC-P-004M3

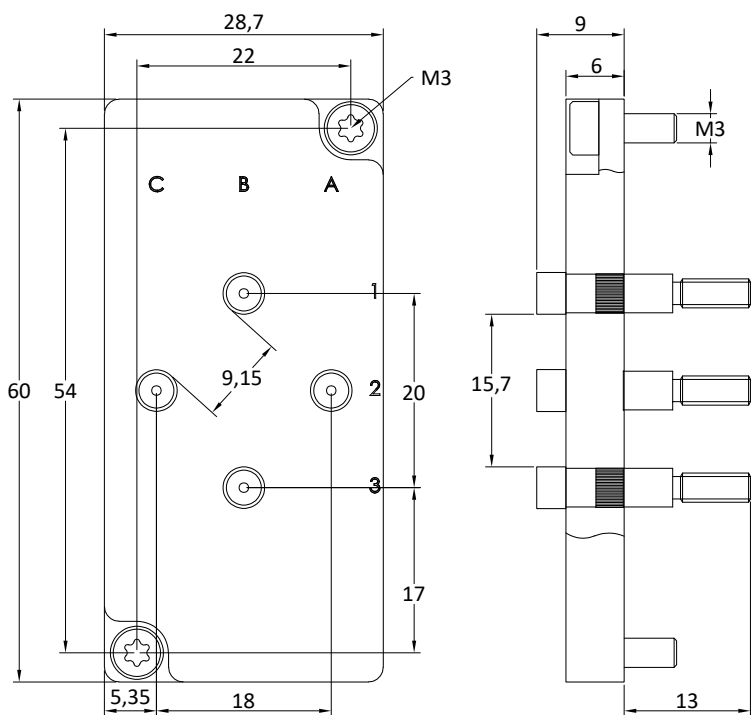

Ordering example:

Pointe côté châssis				
Series	Type de contact			A visser
CB-	HC-	FT-	004	M3
Block type Hight current			Nombre de contacts	

CB-HC-P-002M3

Interface Block

Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	M3
Number of poles:	4
Probes working stroke :	4,4 mm
Air distance:	15,7 mm
Spring force:	10 N
Current rating:	50 A
Typical contact resistance:	<10 mΩ
Operating temperature range:	-30° up to +120°
Components specification:	HC 150M LM 300 B 500 G CR 150M-MR

Compatible with


Compatible mating part 1:	CB-HC-FT-002M3
---------------------------	----------------

Ordering example:

Series	Type de contact	A visser
CB-	HC- P- 002	M3
	Block type Hight current	Nombre de contacts

CB-HC-FT-002M3

Interface Block

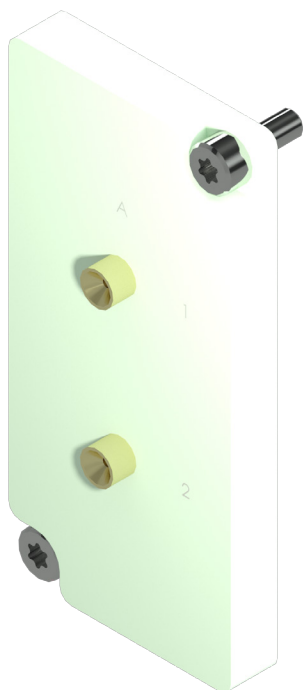


Technical Data

Working distance:	15,1 ±0,5 mm
Connection:	M3
Number of poles:	4
Air distance:	15,7 mm
Current rating:	50 A
Typical contact resistance:	<5 mΩ
Operating temperature range:	-30° up to +120°

Components specification: CF150/3A430-M3


Compatible with

Compatible mating part 1: CB-HC-P-002M3

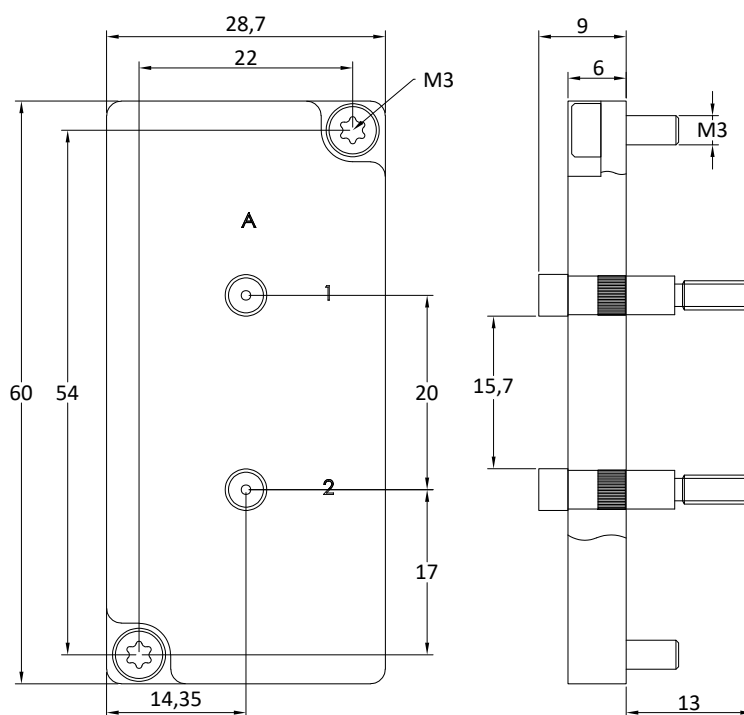

Ordering example:

Pointe côté châssis				
Series	Type de contact			A visser
CB-	HC-	FT-	002	M3
Block type Hight current		Nombre de contacts		



www.cotelec.fr



infos@cotelec.fr