



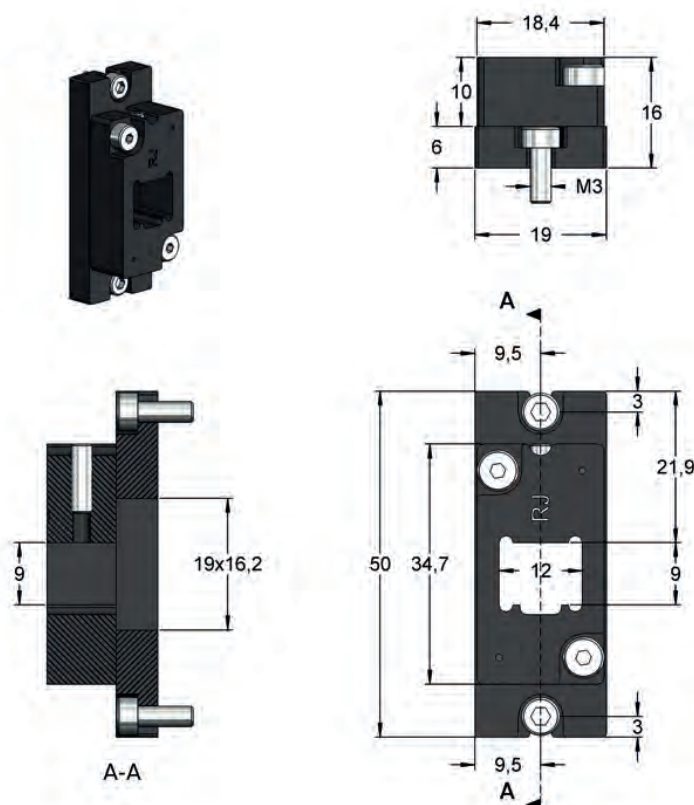

CC-RJ-SUPPORT

Holding Device for Test Connector RJ11 / RJ45 / RJ50

Due to the centered seat of the test connector the holding device allows a parallel movement of the test connector and its connection.

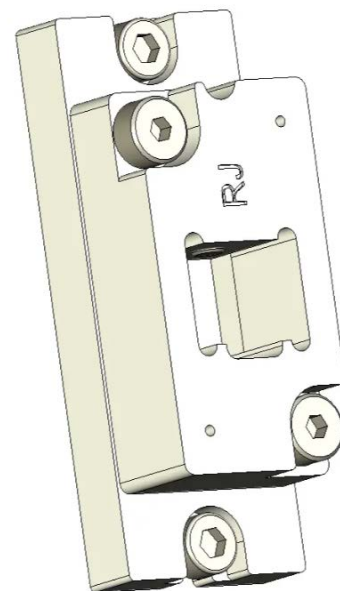

→ Floating-mounting of test connectors of $\pm 0,4$ mm in x- and y-direction

→ A torsion angle of up to $1.8^\circ \pm 0.2^\circ$ is possible

→ The holding device has a life cycle of more than 500.000 mechanical movements

→ The holding device is fixed only by two screws at the upper and lower ends

→ The test connector is attached to the holding device using only one locking screw

Both, the cylinder screws and the threaded pin require a hex wrench SW2,5 mm.