

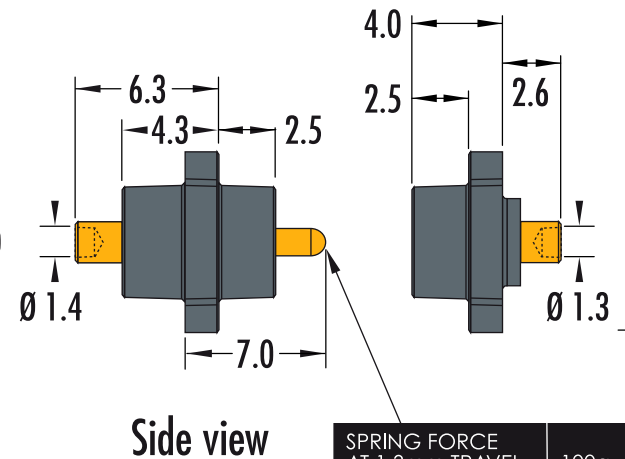
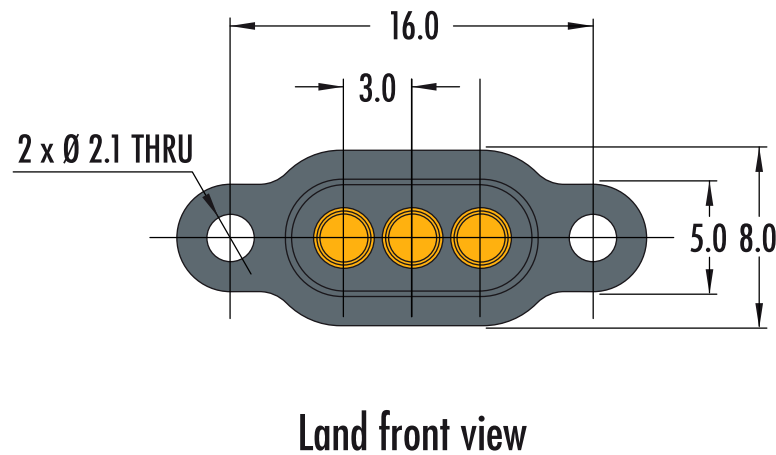


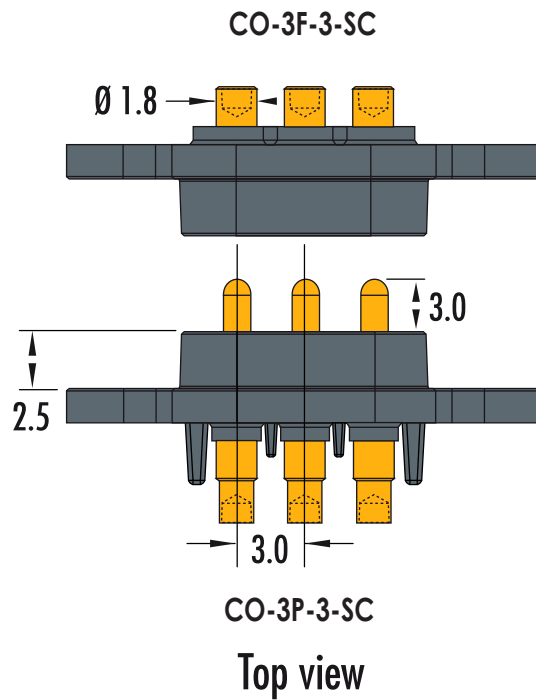

SPRING FORCE AT 1.3mm TRAVEL	100g
COMBINED SPRING FORCE (x3)	300g

Spring contact: CO3PISTON
Contact land: CO3KT

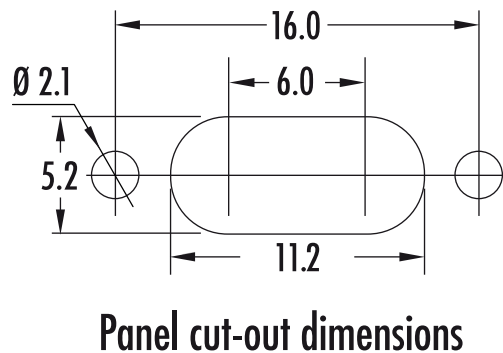

PART NUMBER		CO-3F-3-SC CO-3P-3-SC			
SIZE	SCALE	PLASTIC TYPE		TOLERANCES LINEAR .x = ± 0.2mm .xx = ± 0.10mm .xxx = ± 0.025mm SURFACE ANGULAR ± 1°	UNLESS OTHERWISE SPECIFIED 1. DIMENSIONS ARE IN MM 2. DIMENSIONAL LIMITS APPLY AFTER PLATING / COATING 3. REMOVE ALL BURRS AND BREAK EDGES .25 MAX 4. MACHINE FILLET RADIUS .25 MAX 5. MACHINED SURFACES FLAT WITHING 0.08 mm/mm 6. NON-MACHINED SURFACES FLAT WITHIN 0.25 mm/mm 7. DIAMETERS ON COMMON CL TO BE CONCENTRIC WITHIN 0.13 8. PERPENDICULAR SURFACES TO BE SQUARE WITHIN .13 mm/mm 9. REFERENCE () DIMENSIONS HAVE NO TOLERANCES
A4	3:1	POLYCARBONATE			
RoHS Compliant?				☒	
ENGINEER		CHECKED BY		DATE 29/01/14	
				DRAWN IN ACCORDANCE WITH ANSI STANDARDS	