


Available Tip Styles

Material	Tip Style	ϕ mm
B	A 	0,74 1,52
B S	B 	0,74
B	F 	0,74 1,52
B	D 	0,74 1,02 1,22
B	H 	0,74 1,02 1,22
B	T 	1,52
B	V 	0,74 1,02 1,52

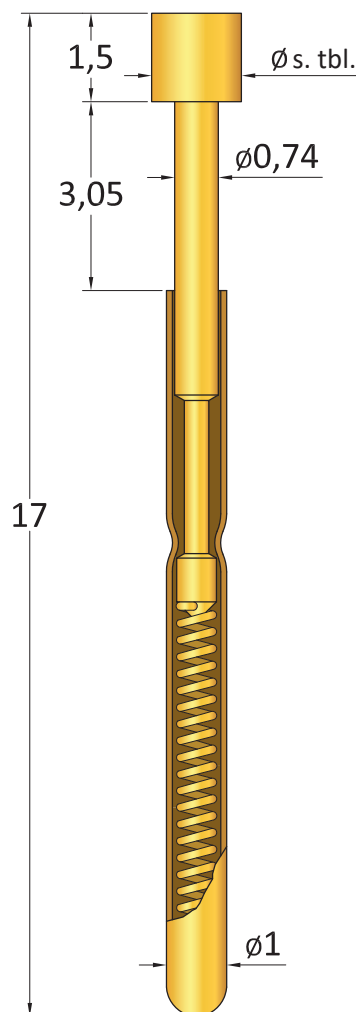

Technical Data

Recommended minimum centers:	1,91 mm
Recommended working stroke:	2,40 mm
Maximum stroke:	3,00 mm
Current rating:	3,0 - 4,0 A
Typical contact resistance:	<20 m Ω
Operating temperature range:	-50° up to +100°

Materials




Plunger:	BeCu or Steel, nickel or gold plated
Barrel:	Nickel-silver or Brass, gold plated
Spring:	Music wire, gold plated
Receptacle:	Nickel-silver or Brass, gold plated

Spring Force (g $\pm 20\%$)

Spring force:	100 g
Alternative:	80 g

Hole size for receptacle

Drills for press ring as a stop:	$\phi 1,32$ - $\phi 1,33$
Drills for press ring insert:	$\phi 1,39$ - $\phi 1,40$

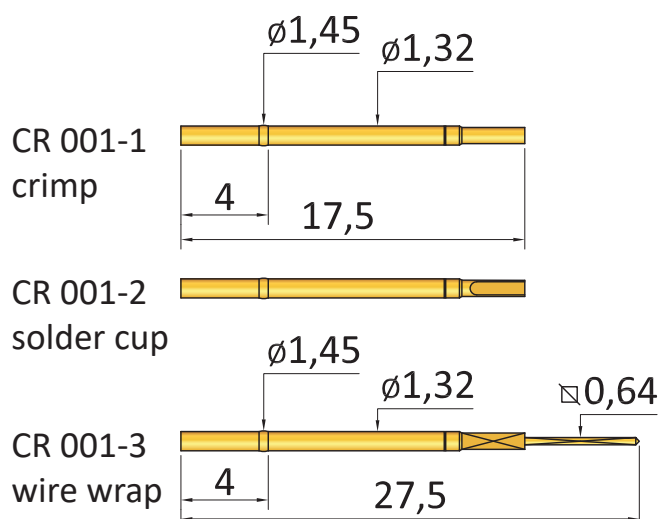

Ordering example:

Series	Tip ϕ mm	Spring Force			
CP 001	F	152	B	100	G
			Tip Style	Material	Plating
				B=BeCu S=Steel	G=Gold N=Nickel