


Available Tip Styles

Material	Tip Style	Ø mm
B	A	1,65 2,54
B S	B	1,30
B P	F	1,30 2,54
B	D	2,03 2,54
B S	E	2,54
B S	HS	1,00
B S	H	1,65 2,54
B	HB	2,54 4,00
B S	T	2,54
S	SW	1,30
S	K	2,54
B S	I	2,54
B S	U	1,30 2,54
B S	Z	2,54

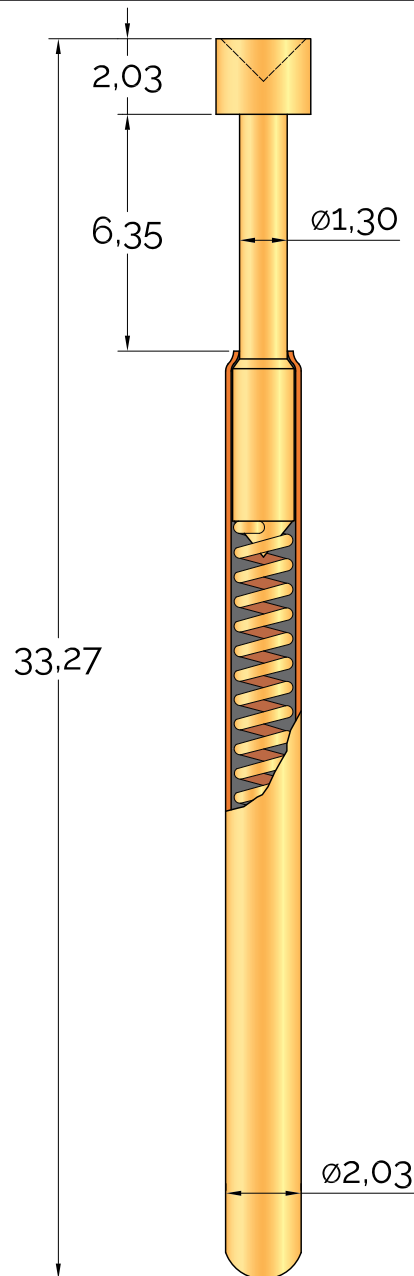

Technical Data

Recommended minimum centers:	3,18 mm
Recommended working travel:	4,30 mm
Maximum travel:	6,35 mm
Current rating:	5,0 A
Typical contact resistance:	<20 mΩ
Operating temperature standard:	-50° up to +100°

Materials



Plunger:	BeCu or Steel, nickel or gold plated
Barrel:	Nickel-silver or Brass, gold plated
Spring:	Music wire, silver or gold plated
Receptacle:	Nickel-silver or Brass, gold plated

Spring Force (g $\pm 20\%$)

Preload:	60 g
Spring force:	120 g
Alternative:	200 g 300 g

Hole size for receptacle

Drills for press ring as stop:	Ø2,34 - Ø2,35
Drills for press ring insert:	Ø2,40 - Ø2,45

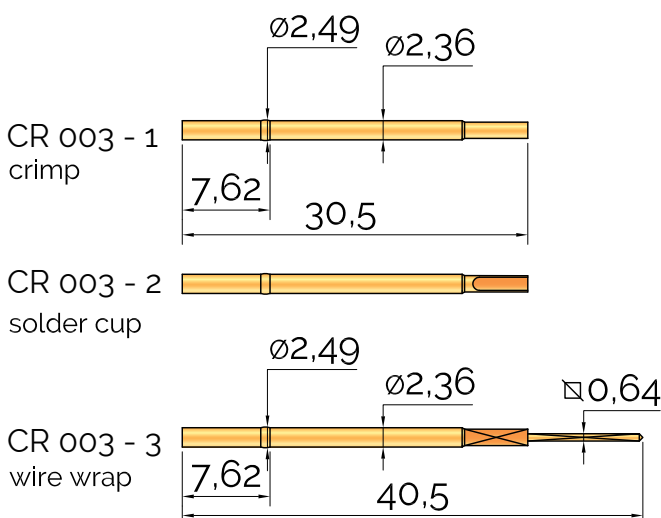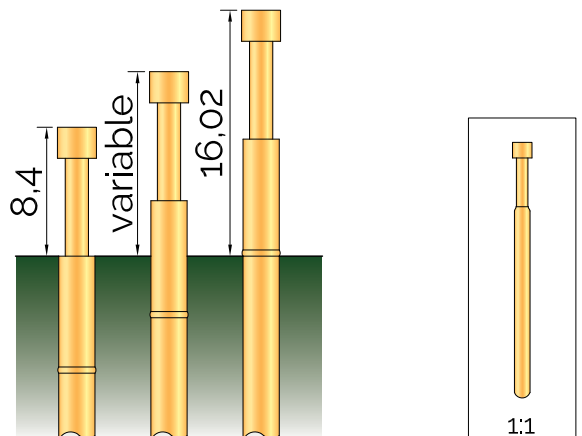

Ordering example:

Series	Tip Style	Tip Ø mm	Material	Spring Force	Plating
CP 003	HS	100	S	200	G
			B= BeCu S= Steel P= Plastic		G= Gold N= Nickel