
















## Available Tip Styles

Material	Tip Style	ø mm
B	A 	1,30 2,54
B S	B 	1,30
B P	F 	1,30 2,54
B	D 	2,03 2,54
B S	E 	2,54
B	HS 	1,00
B	H 	1,30 2,54
B	HB 	2,54 4,00
B	T 	2,54
S	SP 	1,30
B	K 	1,30 2,54
B S	I 	2,54
B S	V 	1,30 2,54
B S	Z 	2,54



## Technical Data

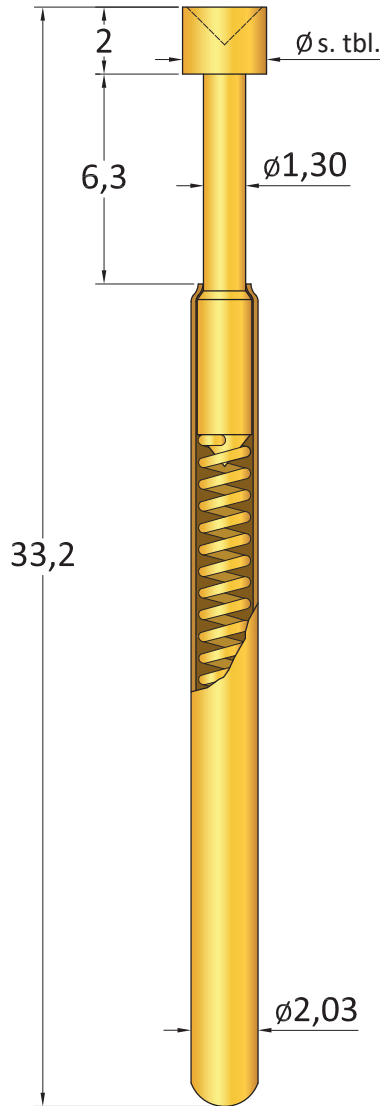Recommended minimum centers:	3,18 mm
Recommended working stroke:	4,30 mm
Maximum stroke:	6,30 mm
Current rating:	5,0 A
Typical contact resistance:	<20 mΩ
Operating temperature range:	-50° up to +100°

## Materials




Plunger:	BeCu or Steel, nickel or gold plated
Barrel:	Nickel-silver or Brass, gold plated
Spring:	Music wire, gold plated
Receptacle:	Nickel-silver or Brass, gold plated

## Spring Force ( g ±20%)

Spring force:	120 g
Alternative:	200 g 300 g

## Hole size for receptacle

Drills for press ring as a stop:	ø2,36 - ø2,37
Drills for press ring insert:	ø2,40 - ø2,45

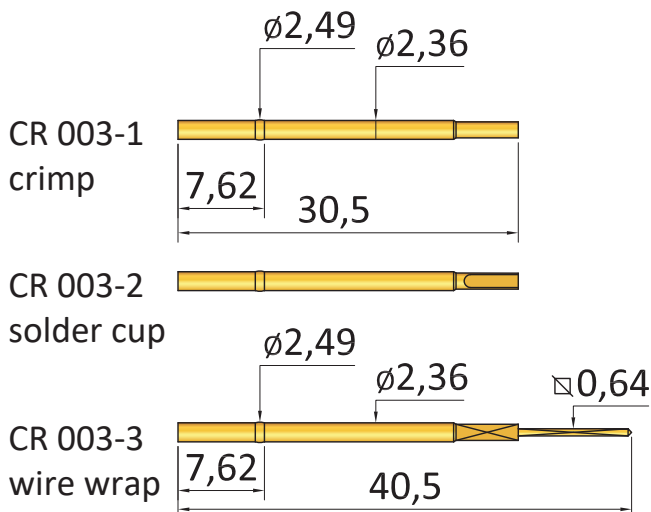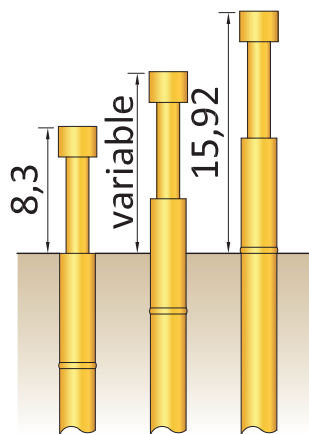

## Ordering example:

Series	Tip ø mm	Spring Force
CR 003	A 254	B 120
	Tip Style	Material
		Plating
		G=Gold
		N=Nickel

B=BeCu  
 S=Steel  
 P=Plastic