


Available Tip Styles

Material	Tip Style	ø mm
B	A 	3,96
B S	B 	2,10
B	F 	2,10 3,96
B	D 	2,10 3,96
B S	E 	2,10 3,96
B	BJ 	2,10
B S	H 	2,10 3,96
S	NX 	2,10
B	HB 	3,96
B S	T 	3,96
B S	LM 	2,10 2,79
S	SP 	2,10
S	SW 	2,10
B S	V 	2,10 3,96

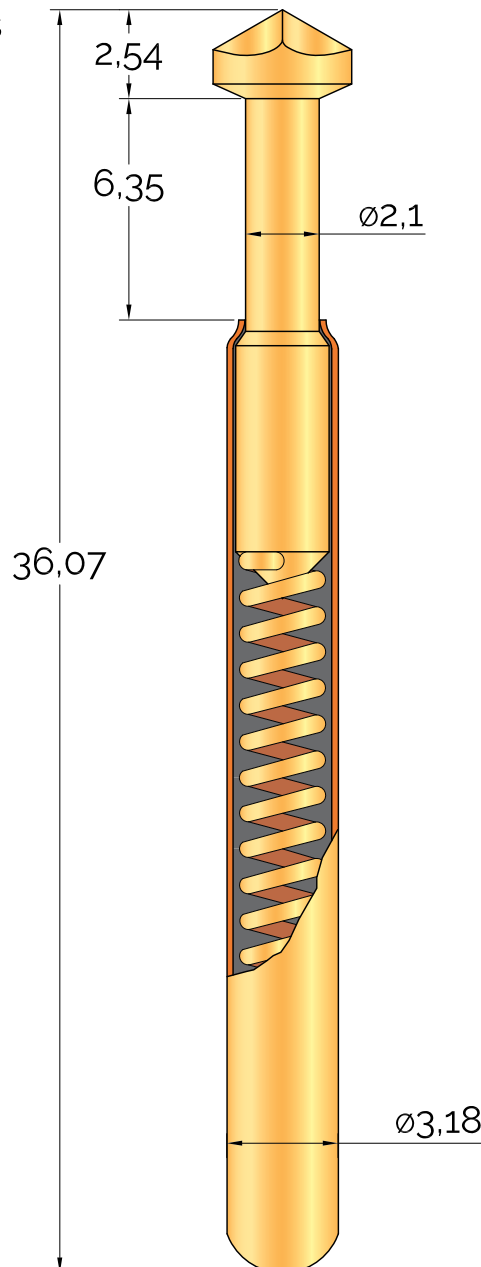

Technical Data

Recommended minimum centers:	4,75 mm
Recommended working travel:	4,30 mm
Maximum travel:	6,35 mm
Current rating:	10,0 A
Typical contact resistance:	<20 mΩ
Operating temperature standard:	-50° up to +100°

Materials



Plunger:	BeCu or Steel, nickel or gold plated
Barrel:	Nickel-silver or Brass, gold plated
Spring:	Music wire, silver or gold plated
Receptacle:	Nickel-silver or Brass, gold plated

Spring Force (g $\pm 20\%$)

Preload:	80 g
Spring force:	400 g
Alternative:	200 g 500 g 600 g

Hole size for receptacle

Drills for press ring as stop:	ø3,54 - ø3,55
Drills for press ring insert:	ø3,58 - ø3,63

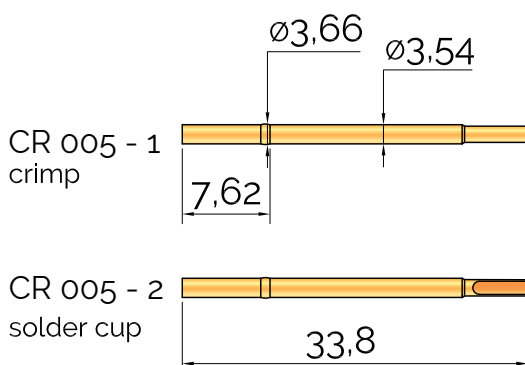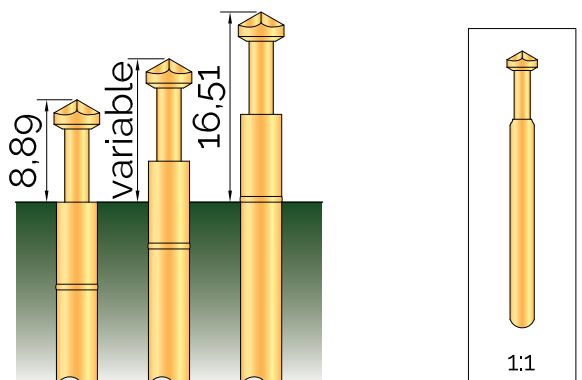

Ordering example:

Series	Tip ø mm	Spring Force		
CP 005	H	396	B	200
				G
	Tip Style	Material	Plating	
		B= BeCu	G= Gold	
		S= Steel	N= Nickel	