


Available Tip Styles

Material	Tip Style	ϕ mm
B	A 	0,60 1,40
B S	B 	0,60
B	F 	0,60 1,40
B	D 	0,60 1,02 1,22
B	E 	0,60 1,22
B	H 	0,60 1,02 1,22
B	T 	1,22
B	LM 	0,60
S	SP 	0,60
B	V 	0,60 1,02 1,22

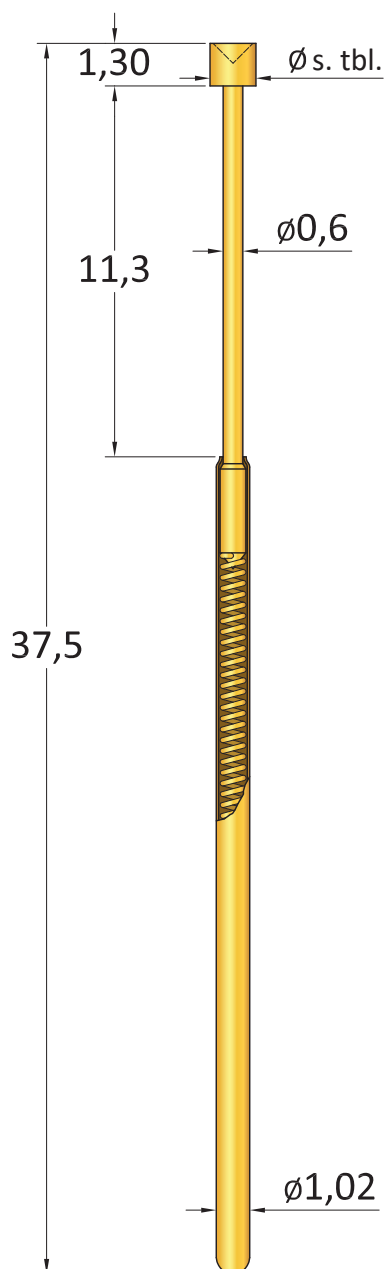

Technical Data

Recommended minimum centers:	1,91 mm
Recommended working stroke:	8,00 mm
Maximum stroke:	11,00 mm
Current rating:	3,0 A
Typical contact resistance:	<20 m Ω
Operating temperature range:	-50° up to +100°

Materials





Plunger:	BeCu or Steel, nickel or gold plated
Barrel:	Nickel-silver or Brass, gold plated
Spring:	Music wire, gold plated
Receptacle:	Nickel-silver or Brass, gold plated

Spring Force (g $\pm 20\%$)

Spring force:	100 g
Alternative:	150 g 200 g

Hole size for receptacle

Drills for press ring as a stop:	$\phi 1,32$ - $\phi 1,33$
Drills for press ring insert:	$\phi 1,39$ - $\phi 1,40$

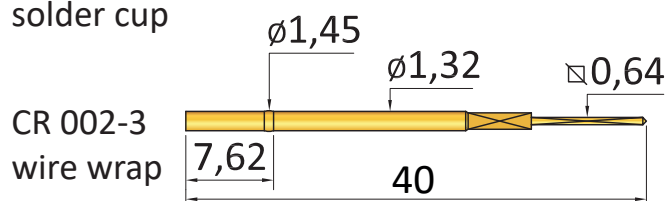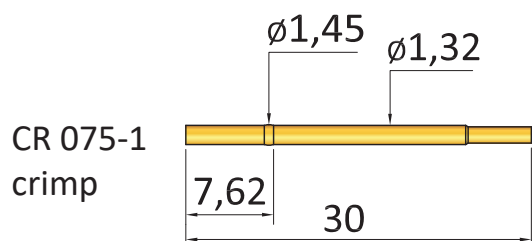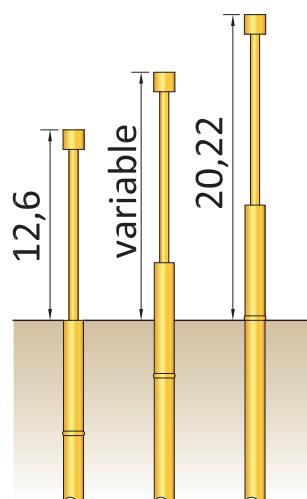

Ordering example:

Series	Tip ϕ mm	Spring Force
CP 035	A	140
	B	100
	G	
	N	

Tip Style

Material

B=BeCu
S=Steel

Plating

G=Gold
N=Nickel