


Material	Tip Style	ø mm
B	A 	0,90 1,52
B S	B 	0,90
B	U 	0,90 1,52
B	D 	0,90 1,27 1,52
B S	E 	0,90 1,52
B S	HS 	0,50 0,60
B S	H 	0,90 1,52
S	-5 	0,60 0,90
B	É 	1,52
B S	u ~ 	1,52
S	Ä Ü 	0,90
B S	Ú 	0,90 1,27 1,52
B S	Y 	1,40
B	-Ä7 	2,30


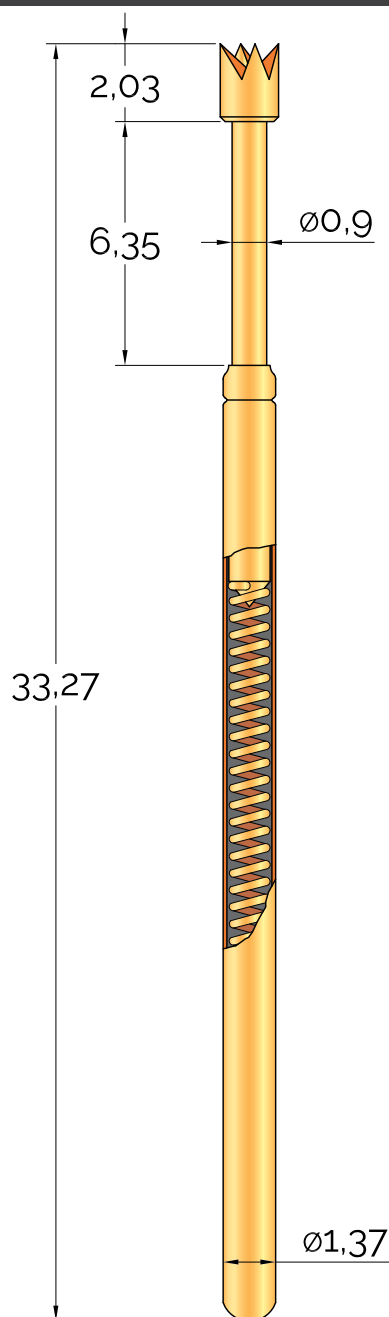


Recommended minimum centers:	2,54 mm
Recommended working travel:	4,30 mm
Maximum travel:	6,35 mm
Current rating:	2,0 - 3,0 A
Typical contact resistance:	<20 mΩ
Operating temperature standard:	-50° up to +100°

Plunger:	BeCu or Steel, nickel or gold plated
Barrel:	Nickel-silver or Brass, gold plated
Spring:	Music wire, silver or gold plated
Receptacle:	Nickel-silver or Brass, gold plated

Preload:	50 g
Spring force:	200 g
Alternative:	50 g
	100 g
	150 g
	300 g

Drills for press ring as stop:	Ø1,67 - Ø1,68
Drills for press ring insert:	Ø1,70 - Ø1,75

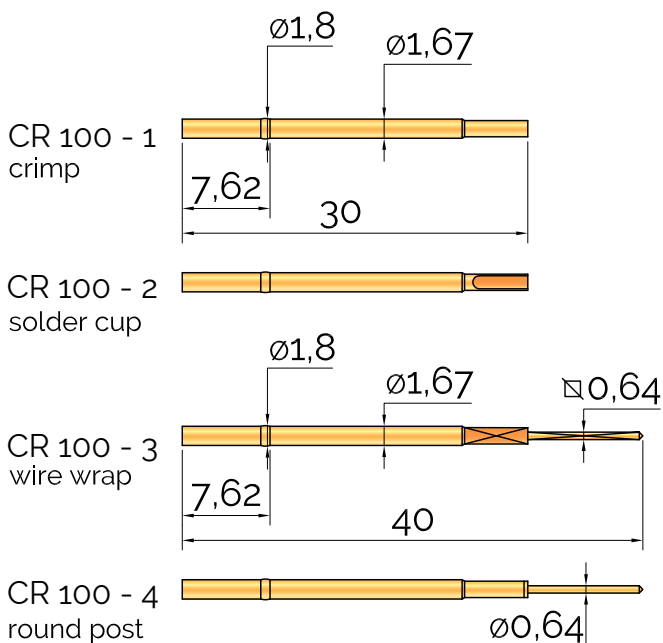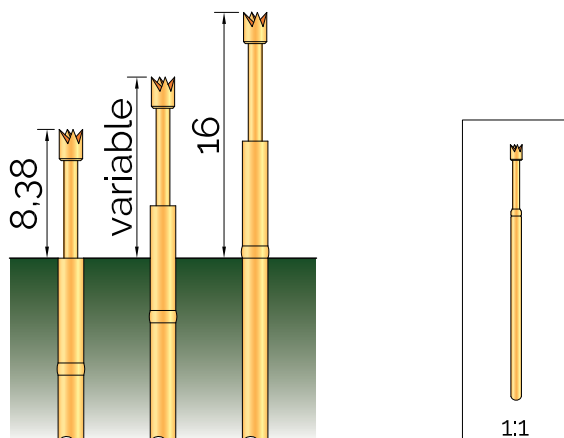

Series	Tip ø mm		Spring Force		
CP 100	D	127	B	200	G
Tip Style		Material B= BeCu S= Steel		Plating G= Gold N= Nickel	