


# GLP 25

## Available Tip Styles

| Material | Tip Style | ø mm                 |
|----------|-----------|----------------------|
| B        | 01        | 0,90<br>1,52         |
| B<br>S   | 02        | 0,90                 |
| B<br>P   | 03        | 0,90<br>1,52         |
| B        | 04        | 0,90<br>1,27<br>1,52 |
| B<br>S   | 05        | 0,90<br>1,52         |
| B        | 07        | 0,50<br>0,60         |
| B        | 08        | 0,90<br>1,52         |
| S        | 09        | 0,60<br>0,90         |
| B        | 10        | 1,52<br>4,50         |
| B        | 11        | 1,52<br>4,50         |
| B        | 13        | 1,52<br>1,70         |
| S        | 14        | 0,90                 |
| B        | 19        | 1,80                 |
| B<br>S   | 21        | 0,90<br>1,27<br>1,52 |
| B        | 22        | 1,52<br>2,00         |
| B        | 24        | 0,50                 |
| B<br>S   | 25        | 1,40                 |
| B        | 27        | 0,50<br>0,60         |
| B        | 30        | 0,90                 |
| B        | 88        | 1,52<br>2,00         |
| S        | 97        | 0,90                 |

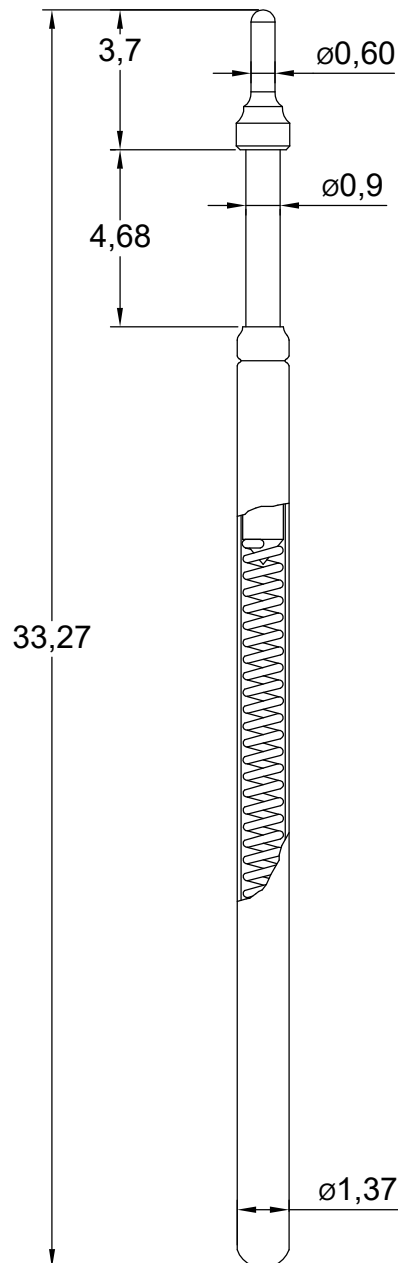

## Technical Data

|                                 |                  |
|---------------------------------|------------------|
| Recommended minimum centers:    | 5,0 mm           |
| Recommended working stroke:     | 4,30 mm          |
| Maximum stroke:                 | 6,35 mm          |
| Current rating:                 | 2,0 - 3,0 A      |
| Typical contact resistance:     | <20 mΩ           |
| Operating temperature standard: | -50° up to +100° |

## Materials


|             |                                      |
|-------------|--------------------------------------|
| Plunger:    | BeCu or Steel, nickel or gold plated |
| Barrel:     | Nickel-silver or Brass, gold plated  |
| Spring:     | Music wire, gold plated              |
| Receptacle: | Nickel-silver or Brass, gold plated  |

## Spring Force ( g ±20%)

|               |                                 |
|---------------|---------------------------------|
| Spring force: | 200 g                           |
| Alternative:  | 60 g<br>100 g<br>150 g<br>300 g |

## Hole size for receptacle

|                                |               |
|--------------------------------|---------------|
| Drills for press ring as stop: | ø1,67 - ø1,68 |
| Drills for press ring insert:  | ø1,70 - ø1,75 |

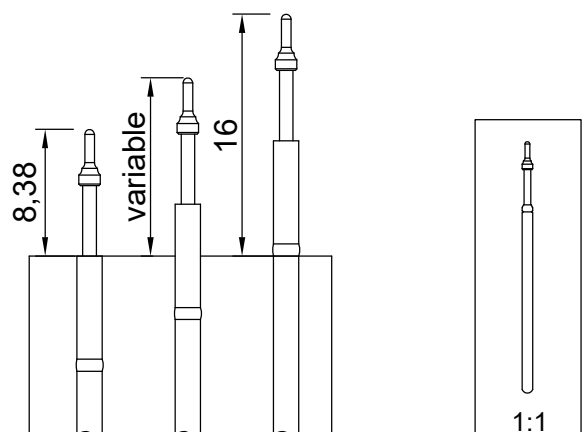

## Ordering example:

| Series | Tip Style | Spring Force |
|--------|-----------|--------------|
| GLP 25 | B         | 55           |
|        | 060       | 150          |
|        |           | G            |
|        | Material  | Tip ø mm     |
|        | B = Be-Cu |              |
|        |           | Plating      |
|        |           | G = Gold     |



This drawing and its specifications are property of Tecon srl and cannot be reproduced, copied, used or given to third parties, in whole or in part, without its written permission. All rights are protected according to law.