








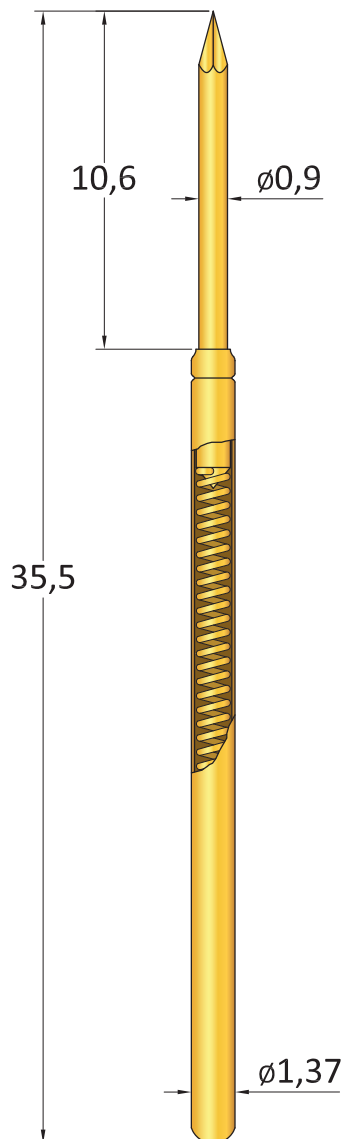


Available Tip Styles

Material	Tip Style	ϕ mm
B S	B 	0,90
B	F 	0,90 1,52
B	E 	0,90 1,52
B	H 	0,90 1,52
B	T 	0,90 1,52
S	SP 	0,90
S	SW 	0,90
B	V 	0,90 1,52
S	S 	0,90



Technical Data

Recommended minimum centers:	2,54 mm
Recommended working stroke:	4,30 mm
Maximum stroke:	6,35 mm
Current rating:	2,0 - 3,0 A
Typical contact resistance:	<20 m Ω
Operating temperature range:	-50° up to +100°

Materials



Plunger:	BeCu or Steel, nickel or gold plated
Barrel:	Nickel-silver or Brass, gold plated
Spring:	Music wire, gold plated
Receptacle:	Nickel-silver or Brass, gold plated

Spring Force (g $\pm 20\%$)

Spring force:	200 g
Alternative:	100 g 150 g 300 g

Hole size for receptacle (see page 38)

Drills for press ring as a stop:	$\phi 1,67$ - $\phi 1,68$
Drills for press ring insert:	$\phi 1,70$ - $\phi 1,75$

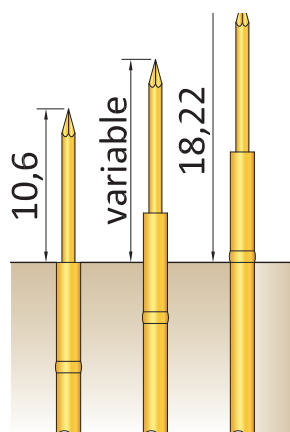

Ordering example:

Series	Tip ϕ mm	Spring Force		
CP 100L	SP	090	S	200
	Tip Style		Material	Plating
			B=BeCu S=Steel	G=Gold N=Nickel G+=Gold Plus