


Available Tip Styles

Mat.	Tip Style	Ø Tip	Tip height	Ø Collar
B	F	0,65 0,80 1,00	2,00	2,00 2,50 3,00
B	A	1,00 2,00 3,00		
B S	B	1,00		
B	F	1,00 2,00 3,00		
B	D	1,00 2,00 3,00		
B S	E	1,80 2,00		
B S	H	2,00 2,50 3,00		
B	HB	3,00 3,50		
B S	T	2,00		
B S	LM	1,00 1,80 2,00		
B S	V	1,00 1,30 1,52		
B S	Y	1,40		
B	HSC	2,30		

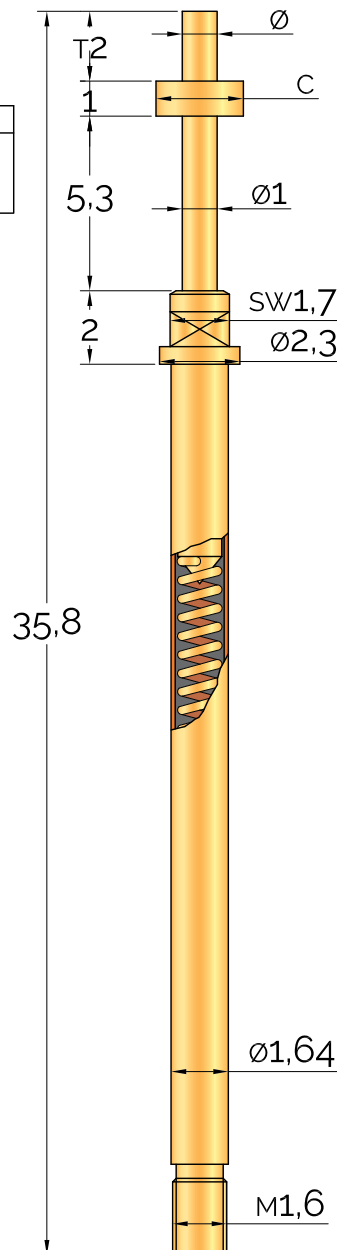

Technical Data

Recommended minimum centers:	2,54 mm
Recommended working travel:	4,00 mm
Maximum travel:	5,00 mm
Current rating:	5,0 - 8,0 A
Typical contact resistance:	<20 m Ω
Operating temperature standard:	-100° up to +200°

Materials



Plunger:	BeCu, gold plated
Barrel:	Brass, gold plated
Spring:	Music wire, silver or gold plated
Receptacle:	Brass, gold plated

Spring Force (g ±20%)

Preload:	70 g
Spring force:	200 g
Alternative:	300 g

Hole size for receptacle

Drills:	Ø2,00
---------	-------

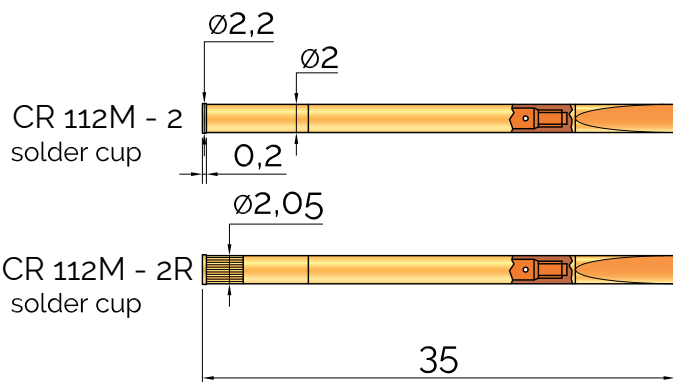

Ordering example:

Series	Tip Ø mm	Ø collar	Spring Force	
CP 112M	F	100	T2	C250
	Tip Style	Tip height	Material	Plating
			B= BeCu	G= Gold N= Nickel

Ordering example:

Series	Tip Ø mm	Spring Force	
CP 112M	D	300	B
	Tip Style	Material	Plating
		B= BeCu S= Steel	G= Gold S= Silver