


CP1/L1575

ICT/FCT Standard Probes $\geq 1,91$ mm / ≥ 75 mil

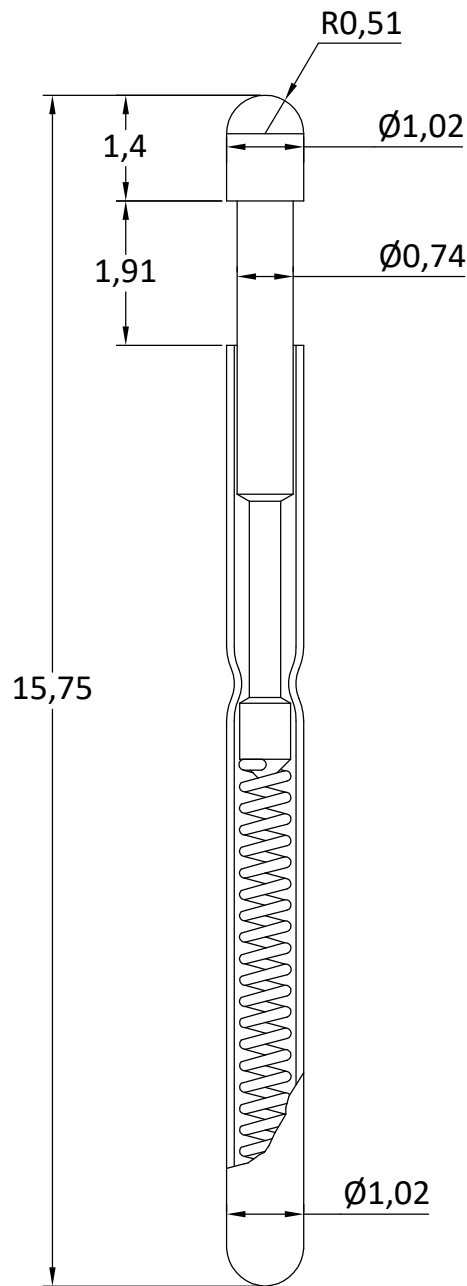

Technical Data

Recommended minimum centers:	1,91 mm
Recommended working stroke:	1,27 mm
Current rating:	3,0 A
Typical contact resistance:	<20 mΩ
Operating temperature standard:	-50° up to +100°

Materials


Plunger:	BeCu or Steel, nickel or gold plated
Barrel:	Nickel-silver or Brass, gold plated
Spring:	Music wire, gold plated
Receptacle:	Nickel-silver or Brass, gold plated

Spring Force (g $\pm 20\%$)

Spring force:	140 g
Alternative:	70 g

Hole size for receptacle

Drills for press ring as stop:	$\varnothing 1,32 - \varnothing 1,33$
Drills for press ring insert:	$\varnothing 1,39 - \varnothing 1,40$

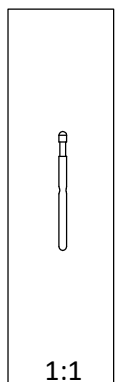

Ordering example:

Series		Tip $\varnothing$ mm		Spring Force		Special Designation
CP 1	D	102	B	140	G	L1575
Tip Style		Material		Plating		
		B= BeCu		G= Gold		



This drawing and its specifications are property of Tecon srl and cannot be reproduced, copied, used or given to third parties, in whole or in part, without its written permission. All rights are protected according to law.