


CP 364

Short Travel and Battery Probe $\geq 6,50$ mm / ≥ 260 mil

Available Tip Styles

Material	Tip Style	ø mm
B	F 	3,00 4,00 6,00
B	J 	4,00
B	BJ 	4,00
B	HS 	1,50 3,00
B	H 	4,00 6,00 8,00
B	U 	3,00 4,00

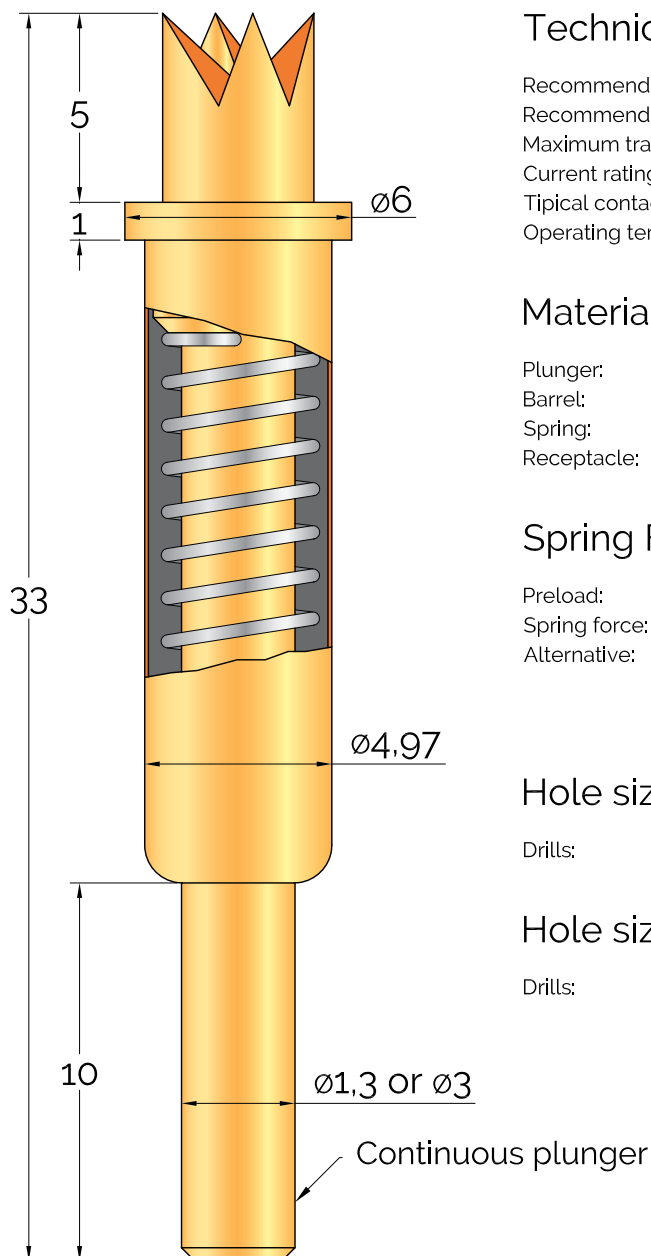

Technical Data

Recommended minimum centers:	6,50 mm
Recommended working travel:	4,00 mm
Maximum travel:	5,00 mm
Current rating:	20,0 A
Typical contact resistance:	<20 mΩ
Operating temperature standard:	-50° up to +100°

Materials

Plunger:	Brass or BeCu, nickel or gold plated
Barrel:	Brass, gold plated
Spring:	Music wire, silver or gold plated
Receptacle:	Brass, gold plated

Spring Force (g $\pm 20\%$)






Preload:	50 g
Spring force:	150 g
Alternative:	300 g 400 g 800 g

Hole size without receptacle

Drills:	ø4,97
---------	-------

Hole size with receptacle

Drills:	ø5,59 - ø5,60
---------	---------------

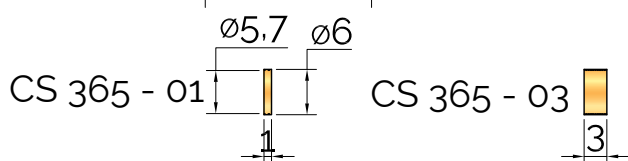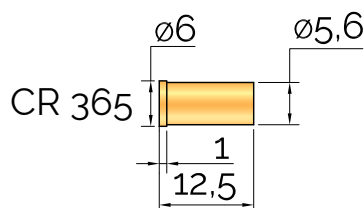

Ordering example

Series	Tip ø mm	Spring Force
CP 364	F	600
	B	800
	G	
	N	

Tip Style

Material
B= BeCu

Plating
G= Gold
N= Nickel