


Available Tip Styles

Material	Tip Style	ø mm
P	A 	3,00

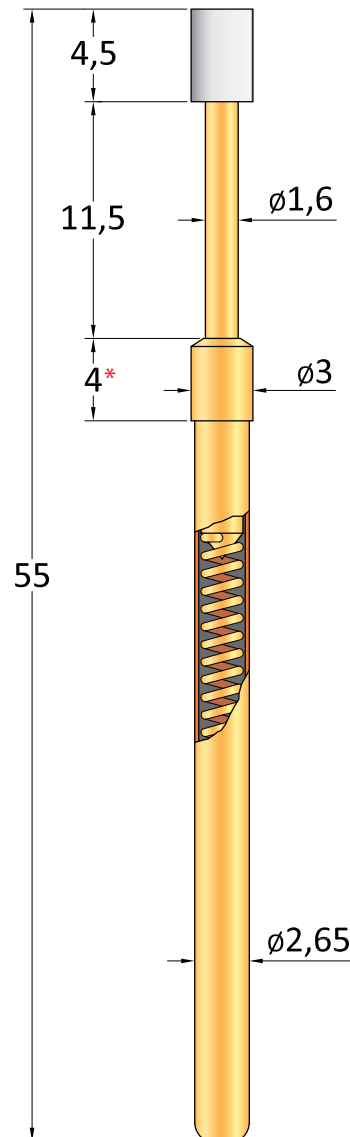

* Collar Height	Total Leng
2	55
4	55

Technical Data

Recommended minimum centers:	4,00 mm
Recommended working stroke:	9,20 mm
Maximum stroke:	11,50 mm
Current rating:	5,0 - 8,0 A
Typical contact resistance:	<30 mΩ
Operating temperature standard:	-50° up to +100°

Materials

Plunger:	BeCu or Steel, nickel or gold plated
Barrel:	Brass, gold plated
Spring:	Stainless steel
Receptacle:	Brass, gold plated

Spring Force (g $\pm 20\%$)



Preload:	50 g
Spring force:	500 g

Hole size without receptacle


Drills:	ø2,64 - ø2,65
---------	---------------

Hole size with receptacle


Drills:	ø2,99 - ø3,00
---------	---------------

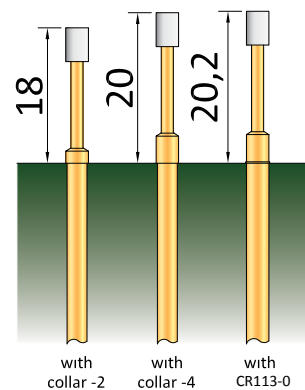

CR113 - 0
crimp

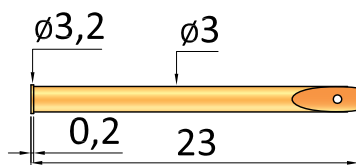

CS113-01



CS113-03



CS113-02



CS113-05



Ordering example:

Series	Tip style	Material P= Plastic	Plating G=Gold N=Nickel
CP 416	-4	A	300
	Collar Height	Tip ø mm	Spring Force