


CP 710

Twist proof Probe

Available Tip Styles

Mat.	Tip Style	ø mm
B	50	1,50 2,00 3,00

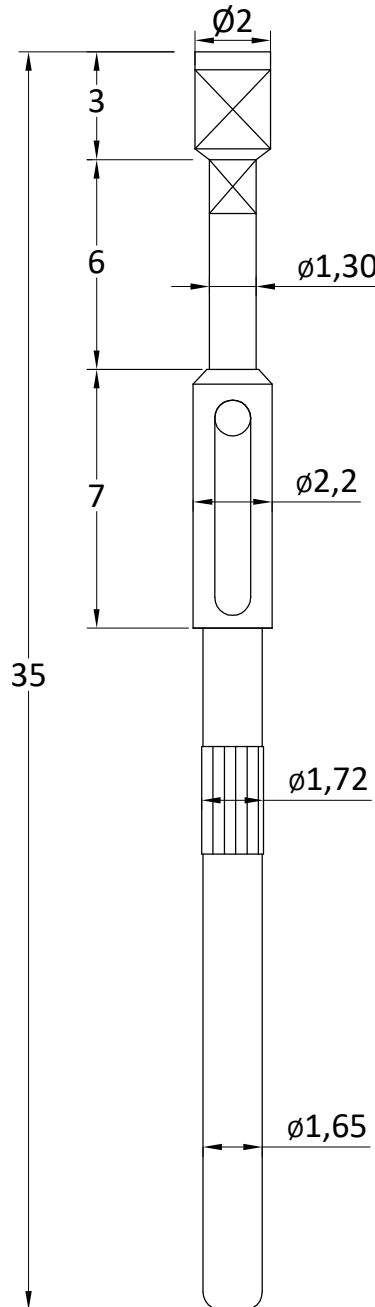

Technical Data

Recommended minimum centers:	2,54 mm
Recommended working stroke:	4,00 mm
Maximum stroke:	5,00 mm
Current rating:	5,0 A
Typical contact resistance:	<20 mΩ
Operating temperature standard:	-50° up to +100°

Materials

Plunger:	BeCu or Steel, nickel or gold plated
Barrel:	Brass, gold plated
Spring:	Music wire, gold plated
Receptacle:	Brass, gold plated

Spring Force (g ±20%)




Spring force:	150 g
Alternative:	300 g

Hole size without receptacle

Drills:	ø1,66 - ø1,67
---------	---------------

Hole size with receptacle

Drills:	ø1,99 - ø2,00
---------	---------------

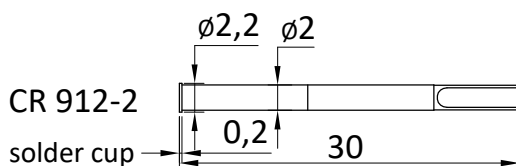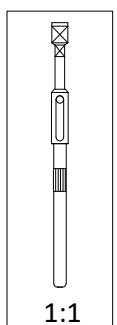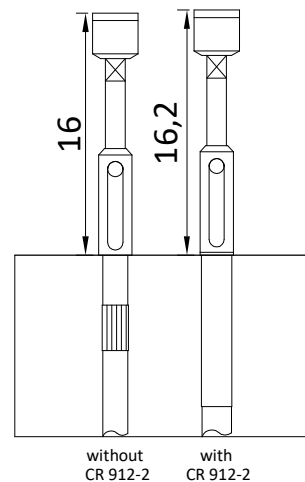

Ordering example:

Series	Tip ø mm	Spring Force			
CP 710	P	200	S	150	G
	Tip Style		Material		Plating
			B= BeCu S= Steel		G= Gold N= Nickel



This drawing and its specifications are property of Tecon srl and cannot be reproduced, copied, used or given to third parties, in whole or in part, without its written permission. All rights are protected according to law.