


Available Tip Styles

Mat.	Tip Style	$\varnothing$ mm
B	P	1,50
S		2,00
		3,00

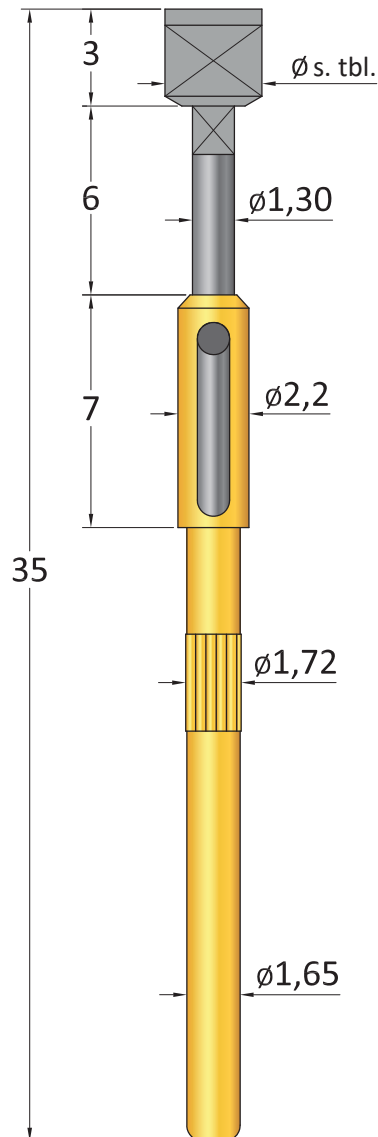

Technical Data

Recommended minimum centers:	2,54 mm
Recommended working stroke:	4,00 mm
Maximum stroke:	5,00 mm
Current rating:	5,0 A
Typical contact resistance:	<20 m Ω
Operating temperature range:	-50° up to +100°

Materials

Plunger:	BeCu or Steel, nickel or gold plated
Barrel:	Brass, gold plated
Spring:	Music wire, gold plated
Receptacle:	Brass, gold plated

Spring Force (g $\pm 20\%$)



Spring force:	150 g
Alternative:	300 g

Hole size without receptacle


Drills:	$\varnothing 1,66$ - $\varnothing 1,67$
---------	---

Hole size with receptacle

Drills:	$\varnothing 1,99$ - $\varnothing 2,00$
---------	---

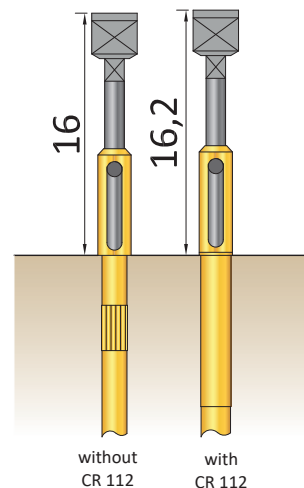

CR 112-2
solder cup

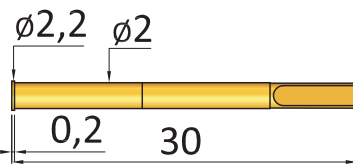

Ordering example:

Series	Tip $\varnothing$ mm	Spring Force		
CP 710	P	300	S	150
				N
	Tip Style		Material	Plating
			B=BeCu	G=Gold
			S=Steel	N=Nickel