


Available Tip Styles

Material	Tip Style	ϕ mm
B	F 	2,50 4,00 6,50
B	D 	3,00 4,00
B	H 	3,00 4,00
B	HB 	4,00

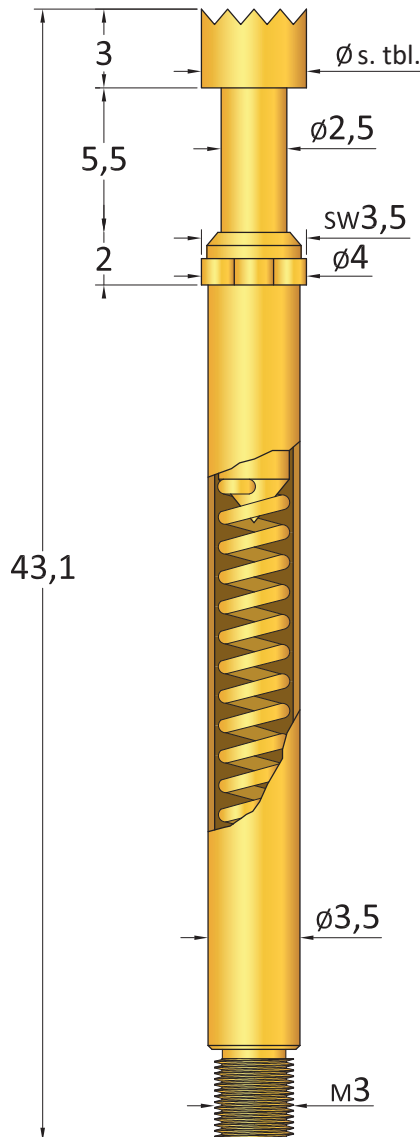

Technical Data

Recommended minimum centers:	5,08 mm
Recommended working stroke:	4,40 mm
Maximum stroke:	5,50 mm
Current rating:	10,0 - 12,0 A
Typical contact resistance:	<20 m Ω
Operating temperature range:	-50° up to +100°

Materials

Plunger:	BeCu, nickel or gold plated
Barrel:	Brass, gold plated
Spring:	Music wire, gold plated
Receptacle:	Brass, gold plated

Spring Force (g $\pm 20\%$)




Spring force:	300 g
Alternative:	500 g

Hole size without receptacle

Drills:	$\phi 3,49$ - $\phi 3,50$
---------	---------------------------

Hole size with receptacle

Drills:	$\phi 3,99$ - $\phi 4,00$
---------	---------------------------

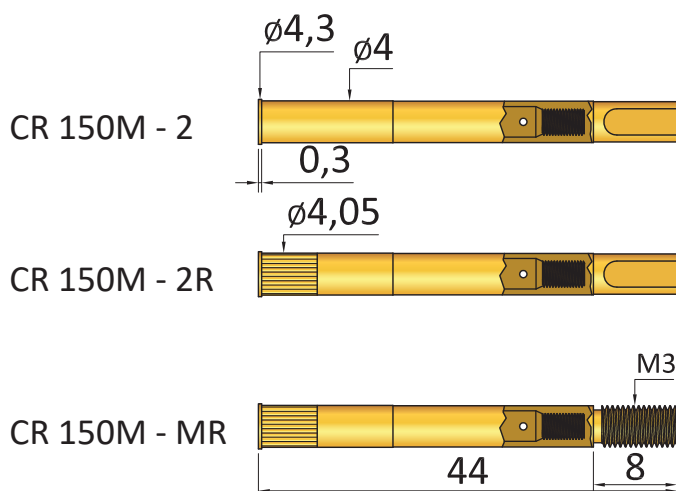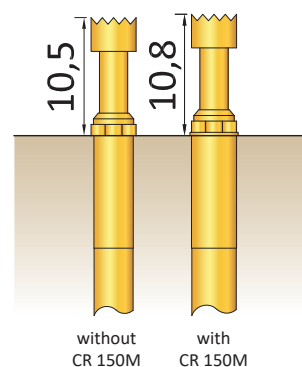

Ordering example:

Series	Tip ϕ mm	Spring Force			
CP 854M	H	400	B	300	G
Tip Style		Material	Plating		
		B=BeCu	G=Gold N=Nickel		