


Available Tip Styles

Material	Tip Style	ø mm
B	A	1,30 1,80 2,00
B S	B	1,30
B	U	1,30 1,80 2,00
B	D	1,30 1,80 2,00
B S	E	1,80 2,00
B S	H	1,30 1,80 2,00
B	HB	2,00
B S	T	2,00
B S	LM	1,30 1,80 2,00
S	SP	1,30
B S	Ú	1,30 1,80 1,52
B S	Y	1,30 1,80 1,52
B	Ä7	2,30

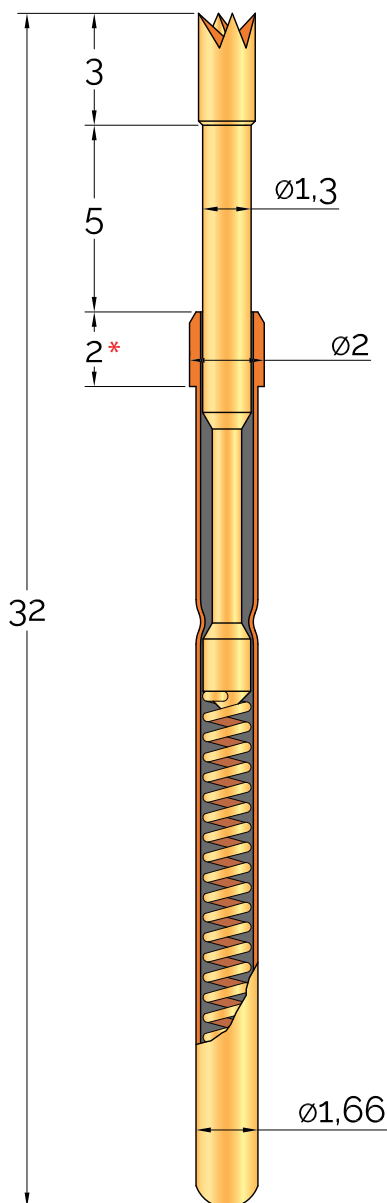

Technical Data

Recommended minimum centers:	2,54 mm
Recommended working travel:	4,00 mm
Maximum travel:	5,00 mm
Current rating:	5,0 - 8,0 A
Typical contact resistance:	<20 mΩ
Operating temperature standard:	-50° up to +100°

Materials

Plunger:	BeCu or Steel, nickel or gold plated
Barrel:	Nickel-silver or Brass, gold plated
Spring:	Music wire, silver or gold plated
Receptacle:	Nickel-silver or Brass, gold plated

Spring Force (g $\pm 20\%$)

Preload:	60 g
Spring force:	200 g
Alternative:	100 g 150 g 250 g 300 g


Hole size without receptacle

Drills:	Ø1,66
---------	-------

Hole size with receptacle

Drills for press ring as stop:	Ø2,00 (see page 58)
--------------------------------	---------------------

* Collar height	Total length	Available different collar heights to adapt the placing of probe and to insert spacers to get the optional height.
2	32	
3	33	
5	35	
7	37	
10	40	

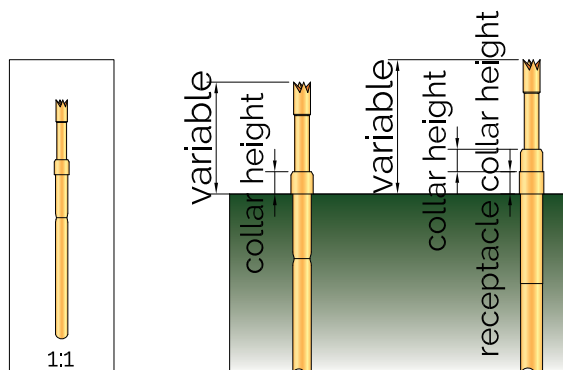

Ordering example:

Series	Tip ø mm	Spring Force	
CP 912	H	200	G
	Tip Style	Material B= BeCu S= Steel	Plating G= Gold N= Nickel