




CR075WL

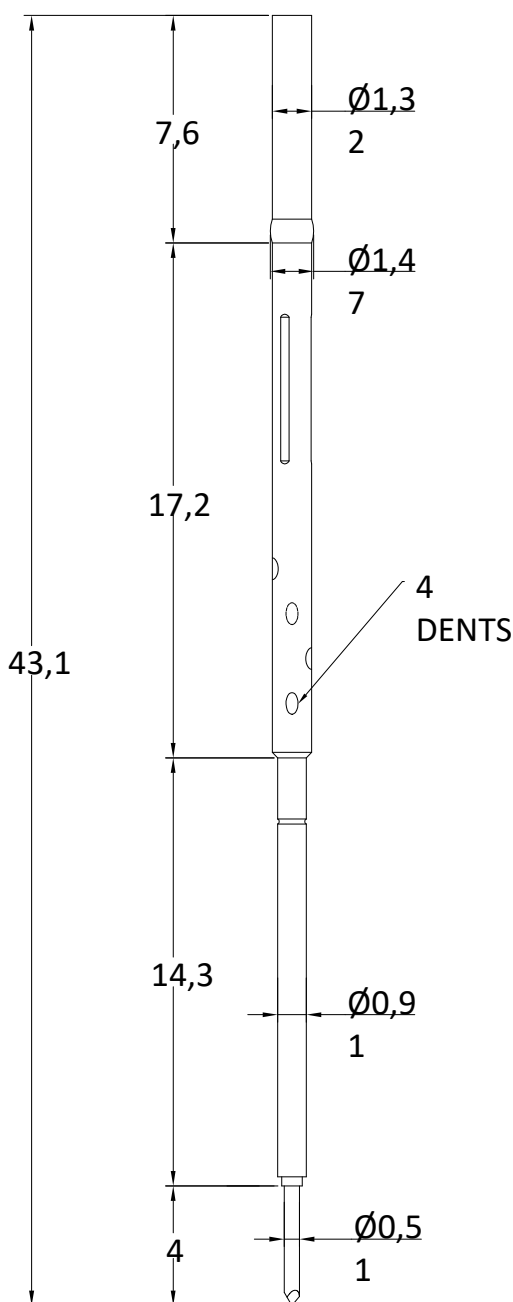

Technical Data

Recommended working stroke:	2,50 mm
Maximum stroke:	4,00 mm
Current rating:	2,0 - 3,0 A
Typical contact resistance:	<20 m Ω
Operating temperature standard:	-50° up to +100°

Materials

Plunger:	BeCu, gold plated
Ball:	Steel, gold plated
Spring:	Steel, gold plated
Receptacle:	Nickel-silver or Brass, gold plated

Spring Force (g $\pm 20\%$)

Spring force:	100 g
---------------	-------

