


Available Tip Styles

Mat.	Tip Style	ø mm	Tip Height	ø Collar
B	FAS	0,65 0,80 1,00	2,00	2,00 2,50 3,00
B	A	1,00 2,00 3,00		
B	S	1,00		
B	F	1,00 2,00 3,00		
B	D	1,00 2,00 3,00		
B	E	1,80 2,00		
B	H	2,00 2,50 3,00		
B	HB	3,00 3,50		
B	T	1,00 2,00		
B	LM	1,00 2,00 3,00		
B	V	1,00 2,00 3,00		
B	Y	1,00		
B	HSC	1,20 1,80		

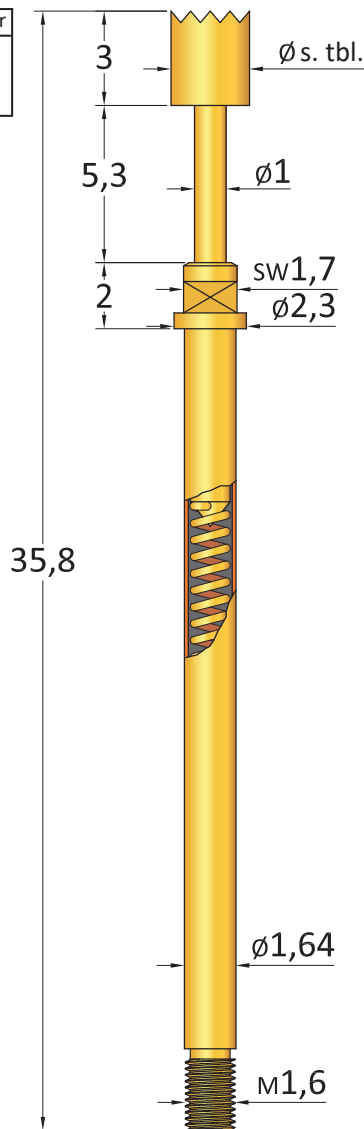

Technical Data

Recommended minimum centers:	2,54 mm
Recommended working stroke:	4,00 mm
Maximum stroke:	5,00 mm
Current rating:	5,0 - 8,0 A
Typical contact resistance:	<20 mΩ
Operating temperature range:	-50° up to +100°

Materials




Plunger:	BeCu, nickel or gold plated
Barrel:	Brass, gold plated
Spring:	Music wire, gold plated
Receptacle:	Brass, gold plated

Spring Force (g $\pm 20\%$)

Spring force:	200 g
Alternative:	300 g

Hole size for receptacle

Drills:	ø1,99 - ø2,00
---------	---------------

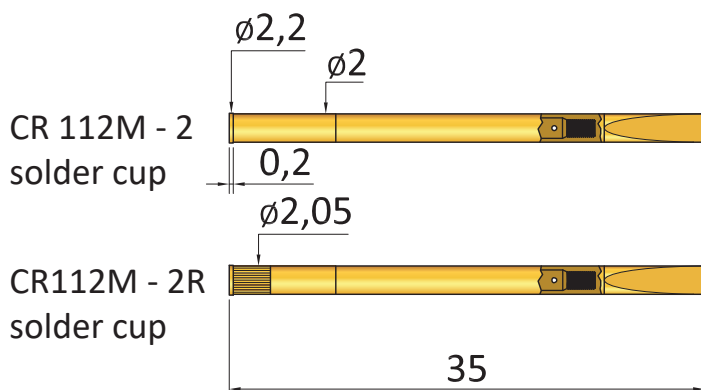

Ordering example:

Series	Tip Style	Tip ø mm	Material	Spring Force	Plating
CP 112M	H	250	B	200	G
			B=BeCu		G=Gold N=Nickel