


Available Tip Styles

Material	Tip Style	ø mm
B	F	2,30
		4,00
		6,50
B	D	3,00
		4,00
B	H	3,00
		4,00
B	HB	4,00

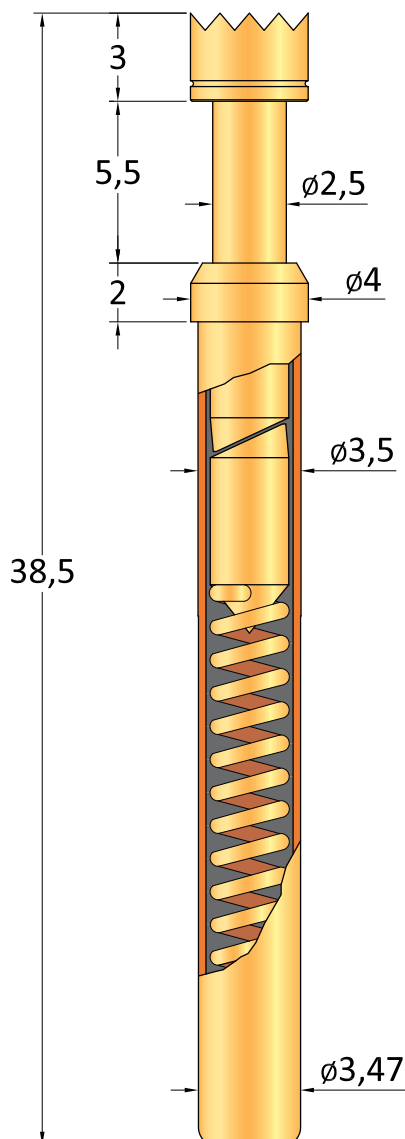

Technical Data

Recommended minimum centers:	5,08 mm
Recommended working stroke:	4,40 mm
Maximum stroke:	5,50 mm
Current rating:	50,0 A
Typical contact resistance:	<10 mΩ
Operating temperature standard:	-50° up to +100°

Materials

Plunger:	BeCu, gold plated
Barrel:	Brass, gold plated
Spring:	Music wire, gold plated
Receptacle:	Brass, gold plated

Spring Force (g $\pm 20\%$)




Preload:	80 g
Spring force:	300 g
Alternative:	500 g

Hole size without receptacle

Drills: $\varnothing 3,49 - \varnothing 3,50$

Hole size with receptacle

Drills: $\varnothing 3,99 - \varnothing 4,00$

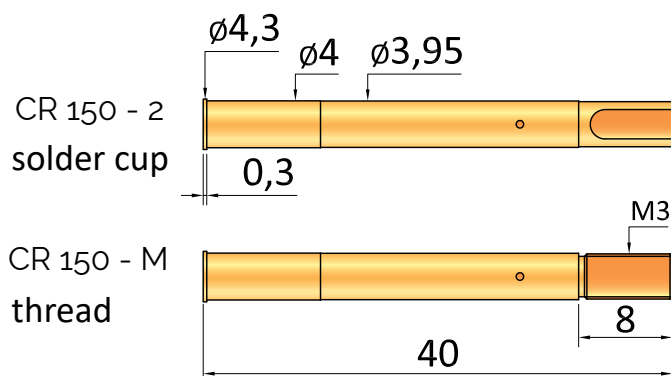

Ordering example:

Series	Tip ø mm	Spring Force		
HC 150	HB	400	B	300
	Tip Style		Material	Plating
			B= BeCu	G= Gold
			S= Steel	S= Silver
			P= Plastic	