
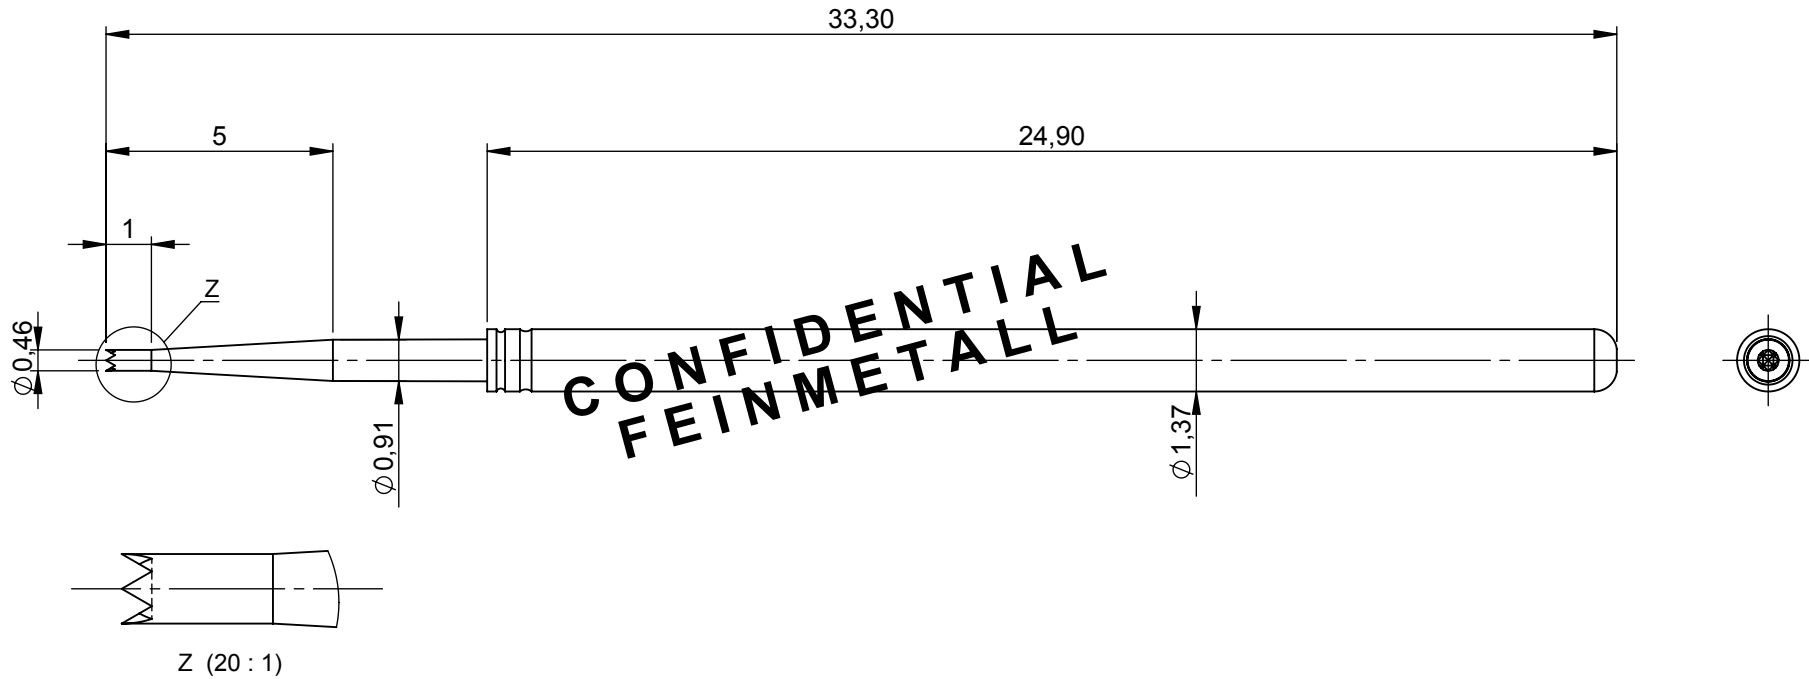


Standardkolben
standard plunger



Bemerkungen/Notes:

Mechanische Spezifikation/Mechanical Specification

Preload: 40cN
Nominal Force: 100cN $\pm 20\%$
Nominal Travel: 4.3mm
Maximum Travel: 6.4mm



Alle Maße sind in mm angegeben,
Measurements are given in mm

Product type				Material				Coating			
Barrel				Bronze				Gold (Au)			
Plunger				Beryllium copper				Gold (Au)			
Spring				Spring steel				Silver (Ag)			
ISO16016 NOTE, PROPRIETARY AND CONFIDENTIAL: Any information contained in this drawing is our sole property and is under copyright protection. It may be used exclusively in connection with a business relationship with us, and must neither be copied nor otherwise reproduced nor made available to third parties without our prior written permission. Any violation will give rise to damage claims and is a criminal offense. FEINMETALL GMBH											
						ISO 8015, ISO 2768-mH		Linear Dimensions < 0,5mm Radius and Chamfer < 0,5mm Angular Dimension < 10°		± 0,02mm ± 0,05mm ± 0,5° Sheet: 1 of: 1	
				Scale: 6:1		Material: Standard: Preliminary product:		Coating: Surface: mm²			
				Product type: Spring Contact Probe							
				Product name: F10006B046G100							
				Product No.: 1000710						Index: E	
				Project:							
				Replaces: F58564B046G130						Replaced by:	