

**FM Choice**

Basic Contact Probes

F10006B150G200IK04

Item number 1013033

**General**

Design	Basic Contact Probe
Type/family	F100
Pitch (mm/mil)	2,54 / 100
Temperature [C°]	-45°C...+100°C
Additional definition	IK04

Electrical specifications

Continuous current (A)	5.00
Typical contact resistance (mOhm)	20.00

Mechanical specifications

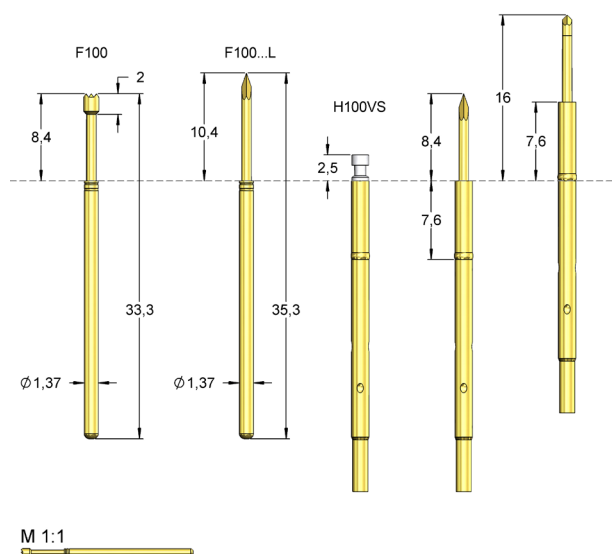
Preload (cN)	80.00
Spring force (cN)	200.00
Nominal travel (mm)	4.30
Maximum travel (mm)	6.40
Pointing accuracy +/- (mm)	0.08

Dimensions

Total length (mm)	33.70
Projection height (mm)	8.40
Tip style diameter (mm)	1.50
Barrel diameter (mm)	1.37

Family drawing

All measurements are in mm.

**Materials & surfaces**

Tip style	06
Tip style material	Beryllium cooper
Tip style plating	Gold
Plunger material	Cooper
Plunger plating	Gold
Barrel material	Bronze
Barrel plating	Gold
Spring material	Spring steel
Spring plating	Silver

Accessories

Tool for receptacle	FEWZ-100EV
---------------------	------------