

**FM Choice**

Basic Contact Probes

F10033S090L200HPL

Item number 1020073

**General**

Design	Basic Contact Probe
Type/family	F100HP
Pitch (mm/mil)	2,54 / 100
Temperature [C°]	-45°C...+100°C
Additional definition	HPL

Electrical specifications

Continuous current (A)	5.00
Typical contact resistance (mOhm)	40.00

Mechanical specifications

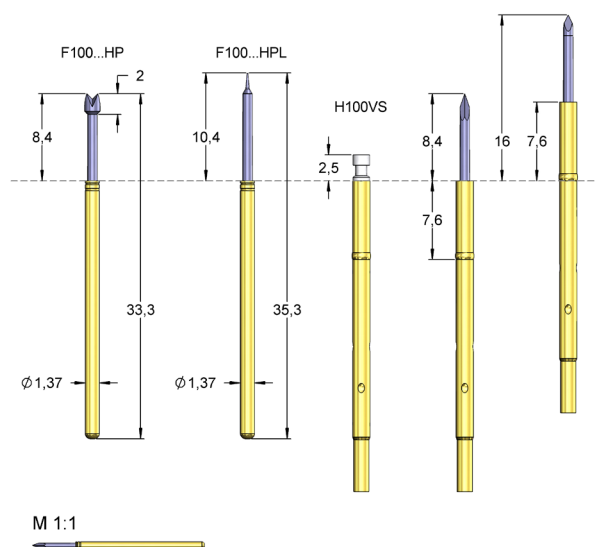
Preload (cN)	130.00
Spring force (cN)	200.00
Nominal travel (mm)	4.30
Maximum travel (mm)	6.40
Pointing accuracy +/- (mm)	0.08

Dimensions

Total length (mm)	35.30
Projection height (mm)	10.40
Tip style diameter (mm)	0.90
Barrel diameter (mm)	1.37

Family drawing

All measurements are in mm.

**Materials & surfaces**

Tip style	33
Tip style material	Steel
Tip style plating	Longtime Gold
Plunger material	Steel
Plunger plating	Longtime Gold
Barrel material	Bronze
Barrel plating	Gold
Spring material	Spring steel
Spring plating	Silver

Accessories

Tool for receptacle	FEWZ-100EV
---------------------	------------