



Basic Contact Probes

F11106B090G040

Order code 1001218

General

Design	Basic Contact Probe
Family	F111
Pitch [mm/mil]	1.27 / 50
Temperature [C°]	-45°C...+80°C

Electrical specifications

Continuous current [A]	3.00
Typical contact resistance [mOhm]	20.00

Mechanical specifications

Preload [cN]	20.00
Spring force [cN]	40.00
Nominal travel [mm]	2.00
Maximum travel [mm]	2.80
Pointing accuracy +/- [mm]	0.09

Dimensions


Total length [mm]	16.50
Projection height [mm]	4.00
Tip style diameter [mm]	0.90
Barrel diameter [mm]	0.69

Materials & surfaces

Tip style	06
Plunger material	Beryllium copper
Plunger plating	Gold
Barrel material	Bronze
Barrel plating	Gold
Spring material	Spring steel
Spring plating	Silver

Family drawing

All measurements are in mm.

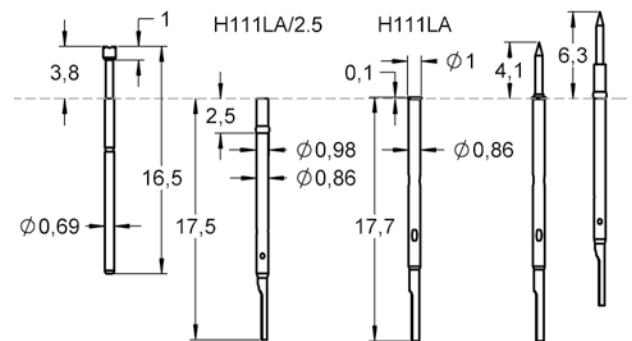

Accessories

Tool for receptacle	FEWZ-511E0
Tool for probe	1003576-FDWZ-050
Other	1035075-H111CRS1, 1024435-H111LA/2.5, 1003523-H111LA2, 1003472-H111LA1, 1004591-H111WR2

Tip style 1

