



Switch Probes

F48506B200G300

Order code 1019876

General

Design	Basic Contact Probe
Family	F485-NO
Pitch [mm/mil]	3.50 / 138
Temperature [C°]	-45°C...+100°C

Electrical specifications

Continuous current [A]	10.00
Typical contact resistance [mOhm]	20.00
Switch type	NO (Off-On-Off)
Switch travel [mm]	2.50
Switch travel 2 [mm]	3.50
Continuous current 2 [A]	1.00

Mechanical specifications


Preload [cN]	80.00
Spring force [cN]	300.00
Nominal travel [mm]	4.00
Maximum travel [mm]	5.00
Pointing accuracy +/- [mm]	0.08
Thread	M2.5X0.35
Tool size [mm]	2.6

Dimensions

Total length [mm]	44.80
Projection height [mm]	10.00
Tip style diameter [mm]	2.00
Barrel diameter [mm]	2.65
Collar diameter [mm]	3.20
Press ring diameter [mm]	3.20

Family drawing

All measurements are in mm.

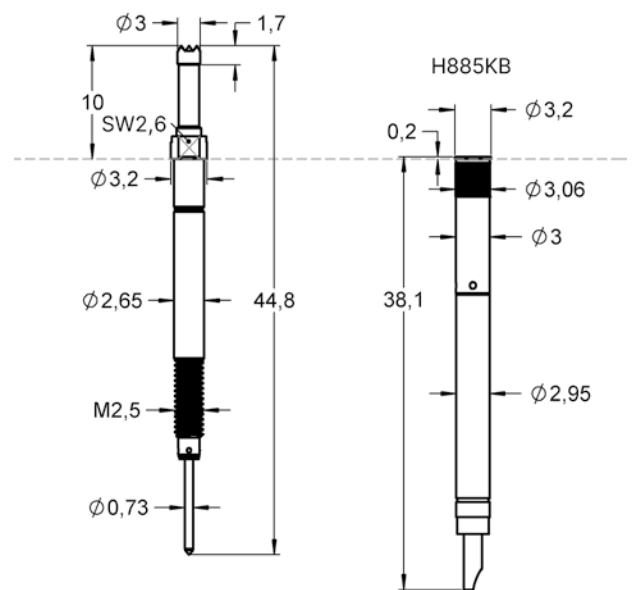

Materials & surfaces

Tip style	06
Plunger material	Beryllium copper
Plunger plating	Gold
Barrel material	Brass
Barrel plating	Gold
Spring material	Spring steel
Spring plating	Silver

Accessories

Tool for receptacle	FEWZ-774E0
Tool for probe	1007628-FWZ886S2, 1007474-FWZ886S1
Other	1037131-H885KBAT, 1036356-H885KBIS, 1003080-H885KB, 1003079-H885IS, 1002935-H885KB-5

Tip style 1

