



Basic Threaded Probes

F73212B180G300

Order code 1011450

General

Design	Basic Contact Probe
Family	F732
Pitch [mm/mil]	2.54 / 100
Temperature [C°]	-45°C...+100°C

Electrical specifications

Continuous current [A]	5.00
Typical contact resistance [mOhm]	20.00

Mechanical specifications

Preload [cN]	60.00
Spring force [cN]	300.00
Nominal travel [mm]	4.00
Maximum travel [mm]	5.00
Pointing accuracy +/- [mm]	0.08
Thread	M1.6
Tool size [mm]	1.7

Dimensions


Total length [mm]	35.70
Projection height [mm]	10.30
Tip style diameter [mm]	1.80
Barrel diameter [mm]	1.65
Collar diameter [mm]	2.30
Press ring diameter [mm]	2.30

Materials & surfaces

Tip style	12
Plunger material	Beryllium copper
Plunger plating	Gold
Barrel material	Brass
Barrel plating	Gold
Spring material	Spring steel
Spring plating	Silver

Family drawing

All measurements are in mm.

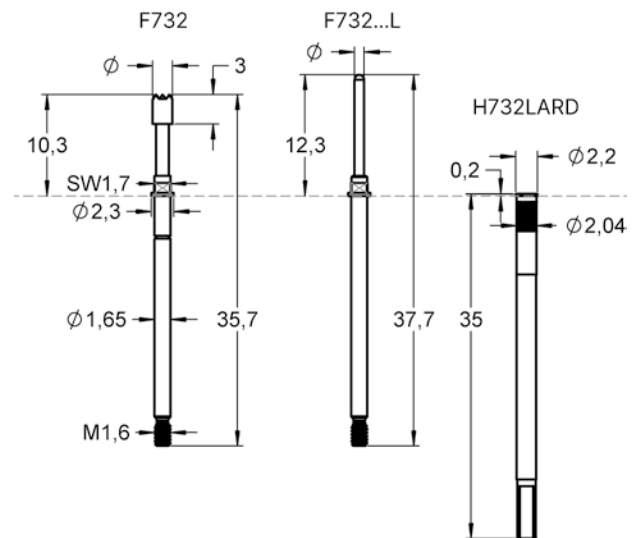

Accessories

Tool for receptacle	FEWZ-772E0
Tool for probe	1015305-FWZ732S2, 1029808-FWZ732S2T, 1001681-FWZ732
Other	1003076-H732LAS1

Tip style 1

