



Basic Contact Probes

F76807S090L130

Order code 1001611

General

Design	Basic Contact Probe
Family	F768
Pitch [mm/mil]	1.27 / 50
Temperature [C°]	-45°C...+80°C

Electrical specifications

Continuous current [A]	3.00
Typical contact resistance [mOhm]	20.00

Mechanical specifications

Preload [cN]	50.00
Spring force [cN]	130.00
Nominal travel [mm]	3.20
Maximum travel [mm]	4.00
Pointing accuracy +/- [mm]	0.07

Dimensions


Total length [mm]	37.00
Projection height [mm]	13.60
Tip style diameter [mm]	0.90
Barrel diameter [mm]	0.79

Materials & surfaces

Tip style	07
Plunger material	Steel
Plunger plating	Longtime Gold
Barrel material	Bronze
Barrel plating	Gold
Spring material	Spring steel
Spring plating	Silver

Family drawing

All measurements are in mm.

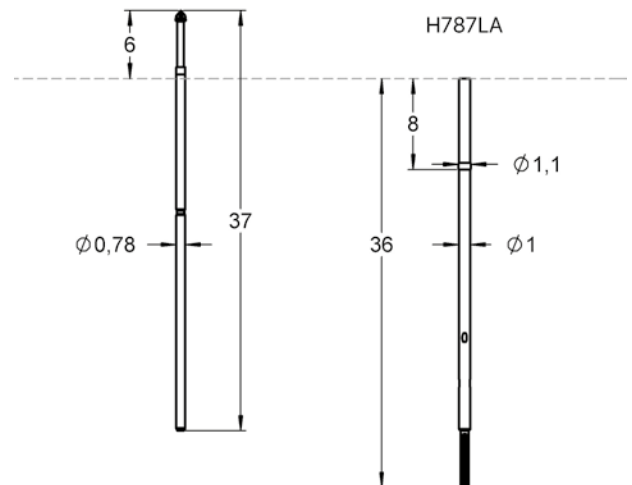

Accessories

Tool for probe	1003576-FDWZ-050
Other	1001853-H787AE, 1001861-H787LI, 1001860-H787LA, 1001854-H787CR

Tip style 1

