



Basic Contact Probes

F77206B200G150E15

Order code 1008918

General

Design	Basic Contact Probe
Family	F772
Pitch [mm/mil]	2.54 / 100
Temperature [C°]	-45°C...+80°C
Additional definition	EXX

Electrical specifications

Continuous current [A]	5.00
Typical contact resistance [mOhm]	25.00

Mechanical specifications

Preload [cN]	20.00
Spring force [cN]	150.00
Nominal travel [mm]	4.00
Maximum travel [mm]	5.00
Pointing accuracy +/- [mm]	0.08

Dimensions


Total length [mm]	37.00
Projection height [mm]	15.00
Tip style diameter [mm]	2.00
Barrel diameter [mm]	1.66
Collar diameter [mm]	2.04
Press ring diameter [mm]	2.04

Materials & surfaces

Tip style	06
Plunger material	Beryllium copper
Plunger plating	Gold
Barrel material	Nickel silver
Barrel plating	Gold
Spring material	Spring steel
Spring plating	Silver

Family drawing

All measurements are in mm.

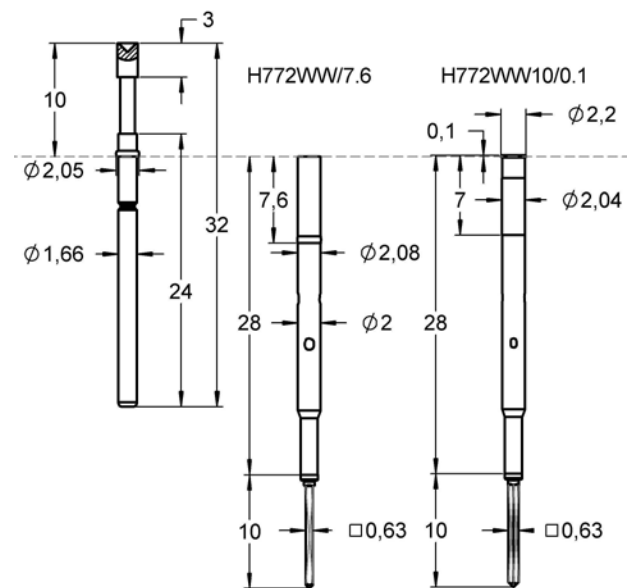

Accessories

Tool for receptacle	FEWZ-772
Other	1007939-H772LAHC, 1043720-H772WW6.5-0.1, 1036005-H772LA-7.6, 1035995-H772WW-7.6, 1035994-H772CR-7.6

Tip style 1

