

**FM Choice**

Basic Contact Probes

F77312B300G150

Item number 1001523

**General**

Design	Basic Contact Probe
Type/family	F773
Pitch (mm/mil)	3,50 / 138
Temperature [C°]	-45°C...+100°C

Electrical specifications

Continuous current (A)	10.00
Typical contact resistance (mOhm)	25.00

Mechanical specifications

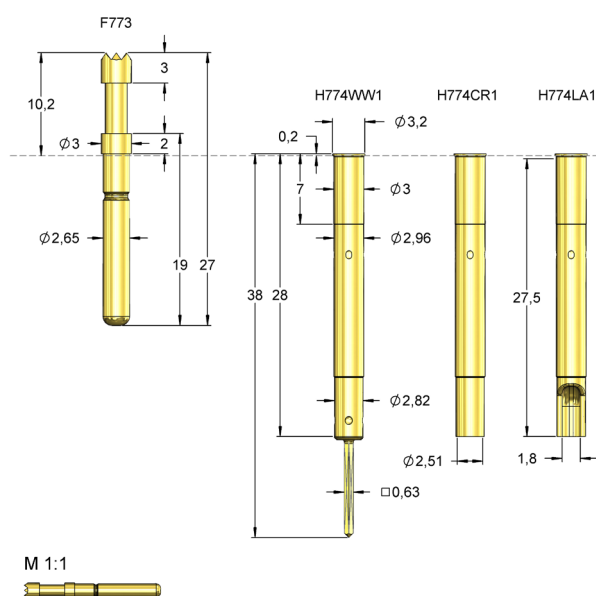
Preload (cN)	50.00
Spring force (cN)	150.00
Nominal travel (mm)	4.00
Maximum travel (mm)	5.00
Pointing accuracy +/- (mm)	0.10

Dimensions

Total length (mm)	27.00
Projection height (mm)	10.00
Tip style diameter (mm)	3.00
Barrel diameter (mm)	2.65
Collar diameter (mm)	3.00
Press ring diameter (mm)	3.00

Family drawing

All measurements are in mm.

**Materials & surfaces**

Tip style	12
Tip style material	Beryllium cooper
Tip style plating	Gold
Plunger material	Cooper
Plunger plating	Gold
Barrel material	Bronze
Barrel plating	Gold
Spring material	Spring steel
Spring plating	Silver