



Basic Contact Probes

# F78833S060L165

Order code 1001551

## General

|                  |                     |
|------------------|---------------------|
| Design           | Basic Contact Probe |
| Family           | F788                |
| Pitch [mm/mil]   | 1.27 / 50           |
| Temperature [C°] | -45°C...+80°C       |

## Electrical specifications

|                                   |       |
|-----------------------------------|-------|
| Continuous current [A]            | 2.00  |
| Typical contact resistance [mOhm] | 20.00 |

## Mechanical specifications

|                            |        |
|----------------------------|--------|
| Preload [cN]               | 30.00  |
| Spring force [cN]          | 165.00 |
| Nominal travel [mm]        | 6.40   |
| Maximum travel [mm]        | 7.00   |
| Pointing accuracy +/- [mm] | 0.10   |

## Dimensions


|                         |       |
|-------------------------|-------|
| Total length [mm]       | 43.00 |
| Projection height [mm]  | 12.00 |
| Tip style diameter [mm] | 0.60  |
| Barrel diameter [mm]    | 0.78  |

## Materials & surfaces

|                  |               |
|------------------|---------------|
| Tip style        | 33            |
| Plunger material | Steel         |
| Plunger plating  | Longtime Gold |
| Barrel material  | Bronze        |
| Barrel plating   | Gold          |
| Spring material  | Spring steel  |
| Spring plating   | Silver        |

## Family drawing

All measurements are in mm.

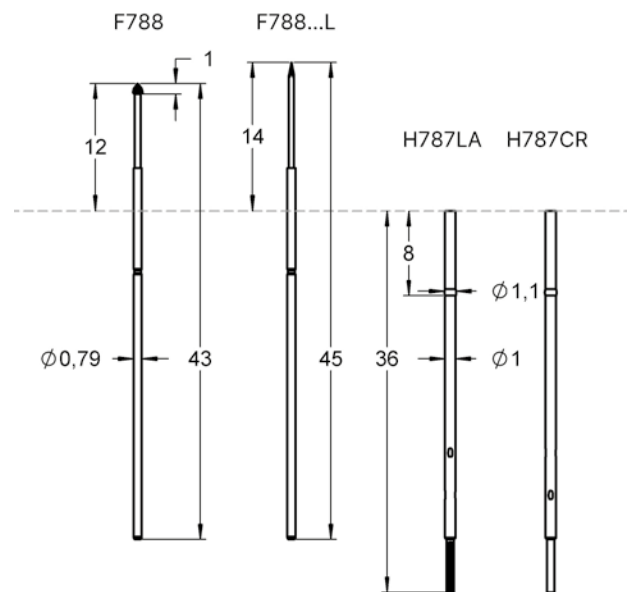

## Accessories

|                |                                                                         |
|----------------|-------------------------------------------------------------------------|
| Tool for probe | 1003576-FDWZ-050                                                        |
| Other          | 1001853-H787AE,<br>1001861-H787LI,<br>1001860-H787LA,<br>1001854-H787CR |

## Tip style 1

