



## Switch Probes

# F87517B180G135

Order code 1003088

### General

Design	Basic Contact Probe
Family	F875-NO
Pitch [mm/mil]	2.54 / 100
Temperature [C°]	-45°C...+100°C

### Electrical specifications

Continuous current [A]	5.00
Typical contact resistance [mOhm]	65.00
Switch travel [mm]	1.50
Continuous current 2 [A]	1.00

### Mechanical specifications

Preload [cN]	30.00
Spring force [cN]	135.00
Nominal travel [mm]	4.00
Maximum travel [mm]	5.00
Pointing accuracy +/- [mm]	0.08
Thread	M1.6
Tool size [mm]	1.7

### Dimensions


Total length [mm]	50.60
Projection height [mm]	10.20
Tip style diameter [mm]	1.80
Barrel diameter [mm]	1.65
Collar diameter [mm]	2.30
Press ring diameter [mm]	2.30

### Materials & surfaces

Tip style	17
Plunger material	Beryllium copper
Plunger plating	Gold
Barrel material	Brass
Barrel plating	Gold
Spring material	Spring steel
Spring plating	Silver

### Family drawing

All measurements are in mm.

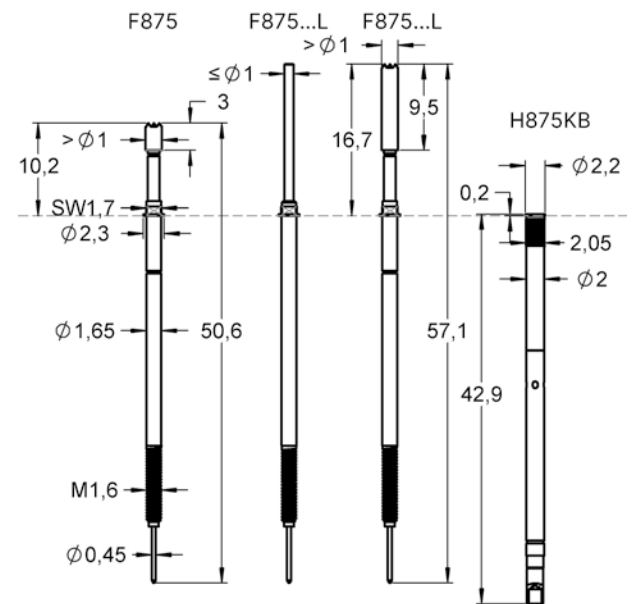

### Accessories

Tool for probe	1015305-FWZ732S2, 1029808-FWZ732S2T
Other	1001866-H875, 1001867-H875-5, 1002997-H875KB-5, 1004479-H875KB, 1006559-H875RD

Tip style 1

