



Switch Probes

F87517K180U080

Order code 1007930

General

Design	Basic Contact Probe
Family	F875-NO
Pitch [mm/mil]	2.54 / 100
Temperature [C°]	-45°C...+100°C

Electrical specifications

Continuous current [A]	5.00
Typical contact resistance [mOhm]	65.00
Switch travel [mm]	1.50
Continuous current 2 [A]	1.00

Mechanical specifications


Preload [cN]	10.00
Spring force [cN]	80.00
Nominal travel [mm]	4.00
Maximum travel [mm]	5.00
Pointing accuracy +/- [mm]	0.08
Thread	M1.6
Tool size [mm]	1.7

Dimensions

Total length [mm]	50.60
Projection height [mm]	10.20
Tip style diameter [mm]	1.80
Barrel diameter [mm]	1.65
Collar diameter [mm]	2.30
Press ring diameter [mm]	2.30

Family drawing

All measurements are in mm.

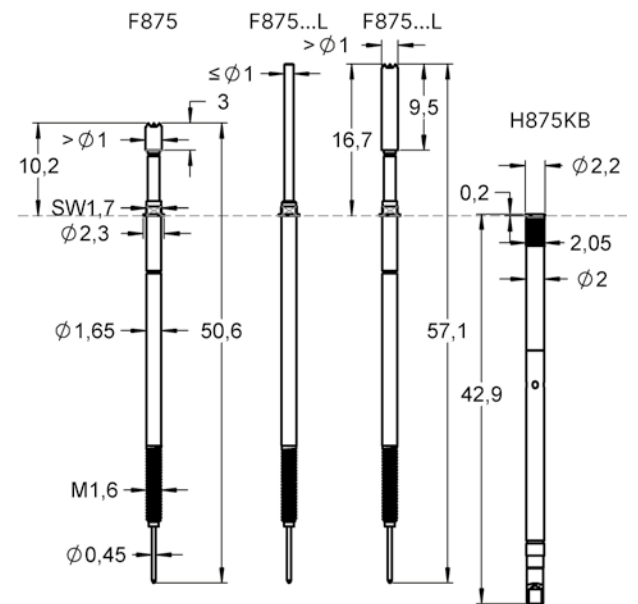

Materials & surfaces

Tip style	17K
Tip style material	Plastic
Tip style plating	Uncoated
Plunger material	Brass
Plunger plating	Gold
Barrel material	Brass
Barrel plating	Gold
Spring material	Spring steel
Spring plating	Silver

Accessories

Tool for probe	1015305-FWZ732S2, 1029808-FWZ732S2T
Other	1001866-H875, 1001867-H875-5, 1002997-H875KB-5, 1004479-H875KB, 1006559-H875RD

Tip style 1

