



Switch Probes

F87917K180U200

Order code 1017115

General

Design	Basic Contact Probe
Family	F879-NO
Pitch [mm/mil]	2.54 / 100
Temperature [C°]	-45°C...+100°C

Electrical specifications

Continuous current [A]	3.00
Typical contact resistance [mOhm]	65.00
Switch travel [mm]	2.60
Continuous current 2 [A]	1.00

Mechanical specifications


Preload [cN]	50.00
Spring force [cN]	200.00
Nominal travel [mm]	4.00
Maximum travel [mm]	5.00
Pointing accuracy +/- [mm]	0.08
Thread	M2X0.25
Tool size [mm]	1.7

Dimensions

Total length [mm]	24.50
Projection height [mm]	9.00
Tip style diameter [mm]	1.80
Barrel diameter [mm]	1.65
Collar diameter [mm]	2.30
Press ring diameter [mm]	2.30

Family drawing

All measurements are in mm.

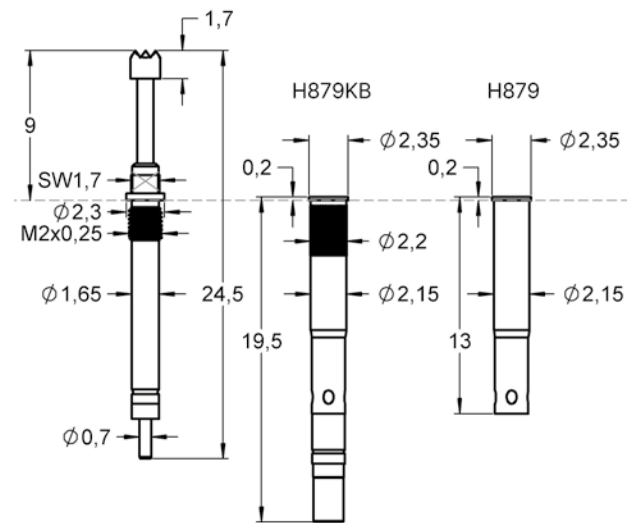

Materials & surfaces

Tip style	17
Tip style material	Plastic
Tip style plating	Uncoated
Plunger material	Beryllium copper
Plunger plating	Gold
Barrel material	Brass
Barrel plating	Gold
Spring material	Spring steel
Spring plating	Silver

Accessories

Tool for receptacle	FEWZ-772E0
Tool for probe	1015305-FWZ732S2, 1029808-FWZ732S2T
Other	1017237-H879, 1017092-H879KB

Tip style 1

