



Switch Probes

F88517K230U200SM

Order code 1004337

General

Design	Basic Contact Probe
Family	F885-NO
Pitch [mm/mil]	3.50 / 138
Temperature [C°]	-45°C...+100°C
Additional definition	SM

Electrical specifications

Continuous current [A]	10.00
Typical contact resistance [mOhm]	50.00
Switch travel [mm]	1.70
Continuous current 2 [A]	1.00

Mechanical specifications


Preload [cN]	70.00
Spring force [cN]	200.00
Nominal travel [mm]	4.00
Maximum travel [mm]	5.00
Pointing accuracy +/- [mm]	0.08
Thread	M2.5
Tool size [mm]	2.6

Dimensions

Total length [mm]	44.80
Projection height [mm]	10.00
Tip style diameter [mm]	2.30
Barrel diameter [mm]	2.65
Collar diameter [mm]	3.20
Press ring diameter [mm]	3.20

Family drawing

All measurements are in mm.

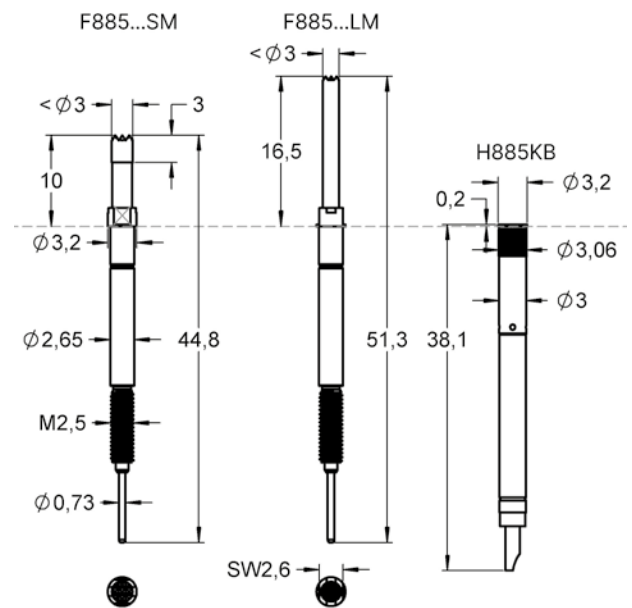

Materials & surfaces

Tip style	17K
Tip style material	Plastic
Tip style plating	Uncoated
Plunger material	Beryllium copper
Plunger plating	Gold
Barrel material	Brass
Barrel plating	Gold
Spring material	Spring steel
Spring plating	Silver

Accessories

Tool for probe	1001683-FWZ885,
	1009781-FWZ885T
Other	1003080-H885KB,
	1037131-H885KBAT,
	1036356-H885KBIS,
	1003079-H885IS, 1002935-H885KB-5

Tip style 1

