



Switch Probes

F88717K200U150

Order code 1027072

General

Design	Basic Contact Probe
Family	F887-NO
Pitch [mm/mil]	4.00 / 157
Temperature [C°]	-45°C...+100°C

Electrical specifications

Continuous current [A]	10.00
Typical contact resistance [mOhm]	40.00
Switch travel [mm]	1.70

Mechanical specifications


Preload [cN]	60.00
Spring force [cN]	150.00
Nominal travel [mm]	4.00
Maximum travel [mm]	5.00
Pointing accuracy +/- [mm]	0.10
Thread	M3X0.35
Tool size [mm]	2.5

Dimensions

Total length [mm]	25.00
Projection height [mm]	9.00
Tip style diameter [mm]	2.00
Barrel diameter [mm]	2.46
Collar diameter [mm]	3.50
Press ring diameter [mm]	3.50

Family drawing

All measurements are in mm.

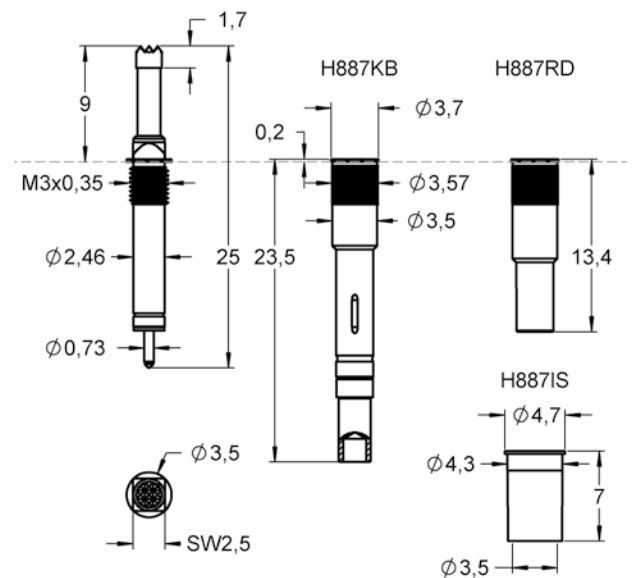

Materials & surfaces

Tip style	17K
Tip style material	Plastic
Tip style plating	Uncoated
Plunger material	Beryllium copper
Plunger plating	Gold
Barrel material	Brass
Barrel plating	Gold
Spring material	Spring steel
Spring plating	Silver

Accessories

Tool for probe	1001687-FWZVF4, 1006748-FWZVF4T
Other	1037130-H887KBAT, 1031734-H887KB20, 1011006-H887IS, 1001758-H887KB, 1004903-H887RD

Tip style 1

