

### Grid:


≥ 4,75 mm

≥ 187 Mil

Installation height with KS: 16,5 mm (.650)/variable

Recommended stroke: 4,4 mm (.173)

## Mounting and functional dimensions

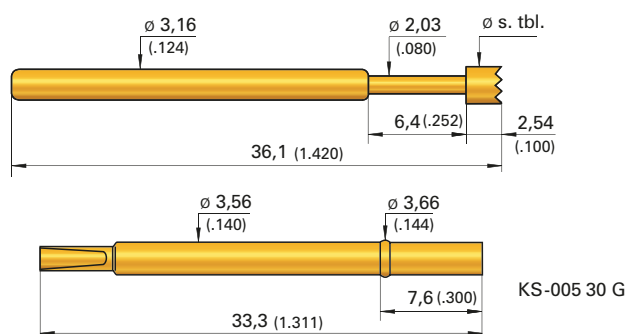


## Available tip styles

Material		Tip style	Plating	Further versions	
				$\varnothing$	$\varnothing$ (inch)
2	01		$\varnothing$ 2,03 (.080)	A	
2	03		$\varnothing$ 3,96 (.156)	A	
2	06		$\varnothing$ 3,96 (.156)	A	

### Collar height and installation height

To adjust the installation height, receptacles with a press-ring (end designation "G") are used. The installation height can be adjusted by assembling the collar lower in the mounting hole.



### Mechanical data

**Working stroke:** 4,4 mm (.173)

**Maximum stroke:** 6,35 mm (.250)

**Spring force at work. stroke:** 2,0 N (7.2oz)

**Alternative:** 3,0 N (10,8oz); 5,0 N (18.1oz)

### Materials

**Plunger:** Steel, gold-plated

**Barrel:** Nickel-silver or Bronze, gold-plated

**Spring:** Steel, gold-plated

**Receptacle:** Nickel-silver, gold-plated

### Electrical data

**Current rating:** 6 - 8 A

**R<sub>i</sub> typical:** < 20 m $\Omega$

### Mounting hole size

**With collar or press-ring as a collar-stop in CEM1 and FR4:**  $\varnothing$  3,53 - 3,54 mm (.1378 - .1399)

**When pressing the press-ring into the Mounting hole in CEM1 and FR4:**  $\varnothing$  3,58 - 3,63 mm (.1409 - .1429)

### Operating temperature

**Standard:** -40° up to +80° C

## Ordering example

Series	Tip material 2 = Steel	Tip style	Tip diameter (1/100 mm)	Plating A = Gold	Spring force (dN)	Collar height (mm)
Test probe:	G K S	0 0 5	2 0 6	3 9 6	A	3 0 0 0
Receptacle with press-ring:	K S - 0 0 5 3 0 G					