

Grid:

≥ 1,00 mm


≥ 40 Mil

Installation height: 10,5/13,0/16,0 mm (.413/ .512/ .630)


Recommended stroke: 5,5 mm (.217)

Mounting and functional dimensions

without receptacle

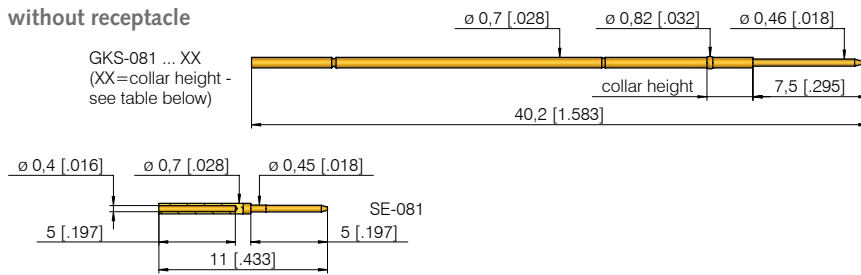


with receptacle

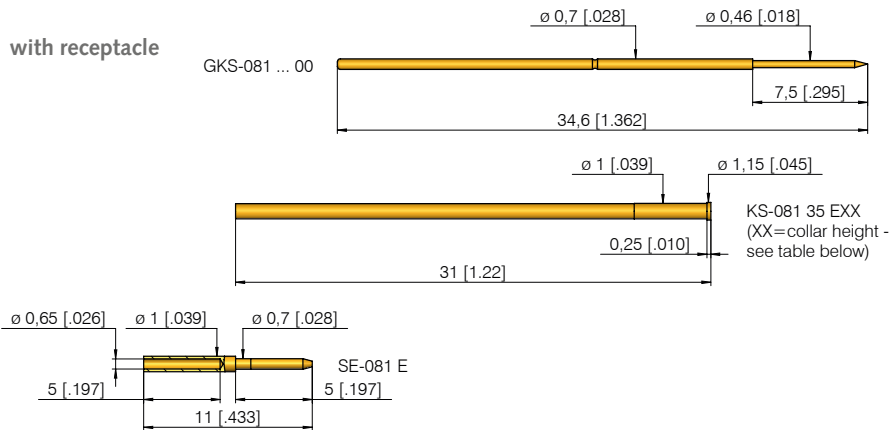

Collar height and installation height

To adjust the installation height, test probes and receptacles with various collar heights are available.

Collar height	Installation height
03	10,5 mm (.413)
05	13,0 mm (.512)
08	16,0 mm (.630)



Mechanical data

Working stroke: 5,5 mm (.217)

Maximum stroke: 7,5 mm (.295)

Spring force at work. stroke: 0,8 N (2.9oz)

Electrical data

Current rating: 3 A

R_i typical: < 30 mΩ

Operating temperature

Standard: -40° up to +80° C

Materials

Plunger: BeCu or steel, gold-plated

Barrel: Brass, gold-plated

Spring: Steel, gold-plated

Receptacle: Brass, gold-plated

Mounting hole size

with receptacle: Ø 0,98 - 0,99 mm (.0386 - .0390)

without receptacle: Ø 0,70 - 0,71 mm (.0276 - .0280)

Note:

The receptacle can be used from grid size 1,27 mm (50 Mil) upward.

Ordering example

	Series	Tip material 2 = Steel 3 = BeCu	Tip style	Tip diameter (1/100 mm)	Plating A = Gold	Spring force (dN)	Collar height (mm)
Test probe for use without receptacle:	G K S	0 8 1	3	5 4	0 5 0	A	0 8 0 3
Test probe for use with receptacle:	G K S	0 8 1	3	5 4	0 5 0	A	0 8 0 0
Receptacles:	K S - 0 8 1 3 5 E 03	K S - 0 8 1 3 5 E 05	K S - 0 8 1 3 5 E 08				
Plug for direct connection to probe (GKS):	S E - 0 8 1						
Plug for receptacle:	S E - 0 8 1 E						

Available tip styles

Material		Tip style	Plating	Further versions	
				Ø	Ø (inch)
3	51		Ø 0,50 (.020)	A	
3	54		Ø 0,50 (.020)	A	
2	91		Ø 0,50 (.020)	A	