

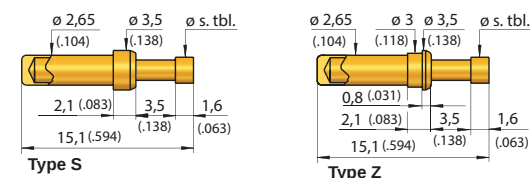


Grid:
 $\geq 4,00 \text{ mm}$
 $\geq 160 \text{ Mil}$

Installation height: 7,3 / 9,0 mm (.287 / .354)
 Recommended stroke: 2,8 mm (.110)

Mounting and functional dimensions

GKS-913

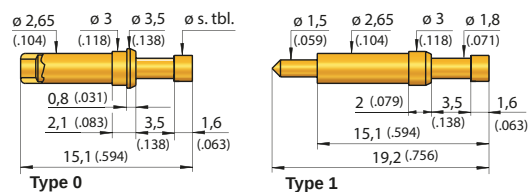

for Type 0, S, Z res. 0C, SC, ZC

Mechanical data

Working stroke: 2,8 mm (.110)
Maximum stroke: shown on table on the right
Spring force at work. stroke: 1,5 N (5.4oz)
Alternative: 0,8 N (2.9oz); 2,5 N (9.0oz)

Operating temperature

Standard: -40° up to +80° C
***** with spec. designation "C":** -100° up to +200° C (1,5 N)

Electrical data

Current rating: 5 - 8 A (24 A ****)
R_i typical: < 20 mΩ (*** < 100 mΩ)

Materials

Plunger: Brass or BeCu, gold- or rhodium-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated or stainless steel **** (C)
Receptacle: Brass, gold-plated

Mounting hole size

in materials CEM1 and FR4:
with receptacle: $\varnothing$ 2,98 - 2,99 mm (.1173 - .1177)
without receptacle: $\varnothing$ 2,65 mm (.1043)

Available tip styles

Material	Tip style	Plating	Further versions	
			$\varnothing$	$\varnothing$ (inch)
1 02		A	3,50	(.138)
3 03		A		
3 05		A		
3 06*		A		
3 06		A	3,50 R 2,30 R	(.138) (.091)
3 08		R		
3 58**		R		

Collar height and installation height

The installation height of the tip is defined by the collar height.

Type 0, S, Z / 0C, SC, ZC			
Collar height	Tip style	Install. height without KS in mm	max. stroke mm
02	02/05/06/08	7,2 (.283)	3,5 (.138)
02	06 180*	7,2 (.283)	3,2 (.126)
02	58**	8,8 (.346)	3,3 (.130)

Type 1 / 1C			
Collar height	Tip style	Install. height without KS in mm	max. stroke mm
02	02/05/06/08	7,1 (.280)	3,5 (.138)
02	06 180*	7,1 (.280)	3,2 (.126)
02	58**	8,7 (.343)	3,3 (.130)

**** For applications up to 24 Amps: HSS-520 (M), see page 87.

Note:

Screw-in version GKS-913 M shown on page 127.

Note (Type C probes are recommended for soldering):

Version

- 0C End of probe barrel open, danger of solder flux entering the probe
- 1C End of probe barrel with solder terminal
- SC End of probe barrel closed; can be soldered into PCB
- ZC End of probe barrel closed; can be soldered into PCB

Warning: Probes should be soldered with great care. Ensure the inside of the barrel is not exposed to high temperatures, because this could destroy the spring.

The KS-913 35 receptacle can only be combined with the probe types 0, S, Z, 0C, SC and ZC.

Ordering example

Series Tip material Tip style Tip diameter (1/100 mm) Plating Spring force (dN) Collar height (mm) Type

1 = Brass
3 = BeCu A = Gold

Test probe:

G K S 9 1 3 3 0 8 2 3 0 R 1 5 0 2 0

Receptacles:

K S - 9 1 3 3 5