


HC2516

Pointe de Puissance Renforcée Série 25 à Visser (100,0 A), Tête Sphérique de Diamètre 9,00 mm, Revêtement Argent, Pression 1,733 Grs

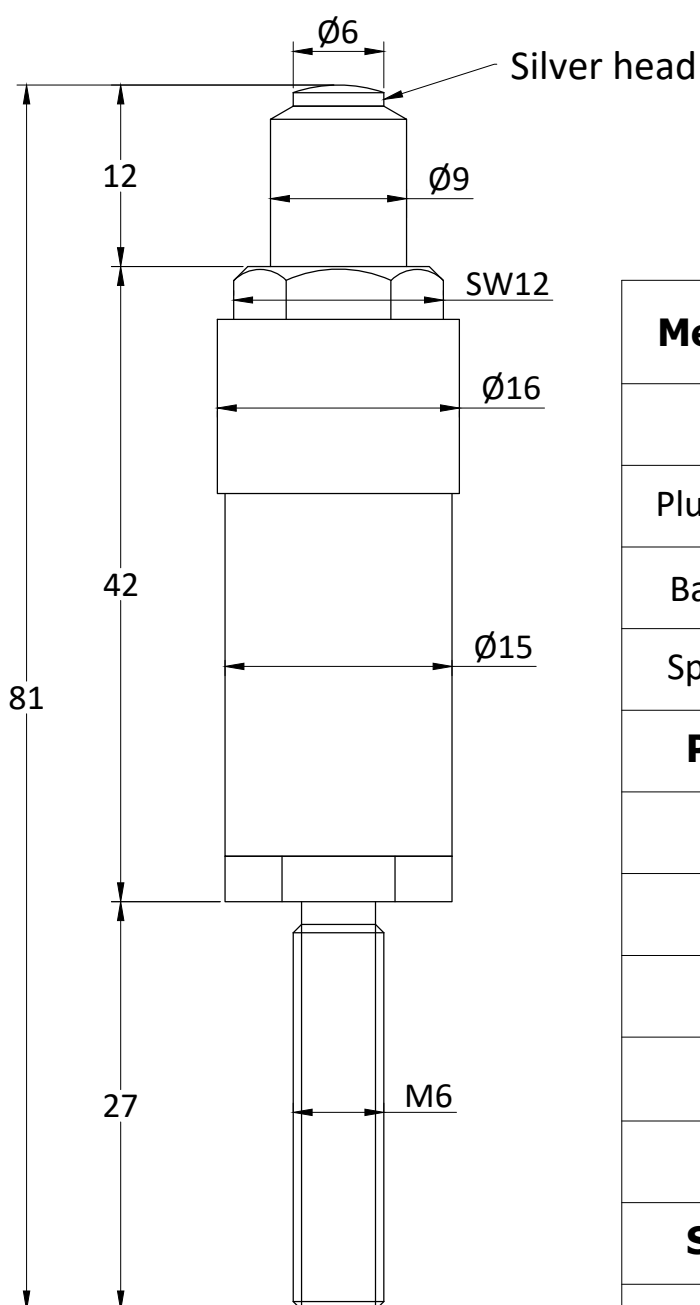

Mechanical Technical Data

	Material	Plating
Plunger	Brass	Silver
Barrel	Brass	Silver
Spring	Inox	/

Physical Technical Data

Total travel	12 mm
Work travel	7 mm

Electrical Data

Nominal R	< 1 mOhm
Current rating	100 A

Spring force (g ± 20%)

Spring force: 1700g
