



## High Current Probes

# HCF77246B200G300

Order code 1013176

### General

|                  |                     |
|------------------|---------------------|
| Design           | Basic Contact Probe |
| Family           | HCF772              |
| Pitch [mm/mil]   | 2.54 / 100          |
| Temperature [C°] | -45°C...+200°C      |

### Electrical specifications

|                                   |       |
|-----------------------------------|-------|
| Continuous current [A]            | 20.00 |
| Typical contact resistance [mOhm] | 10.00 |

### Mechanical specifications

|                            |        |
|----------------------------|--------|
| Preload [cN]               | 50.00  |
| Spring force [cN]          | 300.00 |
| Nominal travel [mm]        | 4.00   |
| Maximum travel [mm]        | 5.00   |
| Pointing accuracy +/- [mm] | 0.08   |

### Dimensions


|                          |       |
|--------------------------|-------|
| Total length [mm]        | 32.30 |
| Projection height [mm]   | 10.50 |
| Tip style diameter [mm]  | 2.00  |
| Barrel diameter [mm]     | 1.66  |
| Collar diameter [mm]     | 2.00  |
| Press ring diameter [mm] | 2.00  |

### Materials & surfaces


|                  |                  |
|------------------|------------------|
| Tip style        | 46               |
| Plunger material | Beryllium copper |
| Plunger plating  | Gold             |
| Barrel material  | Brass            |
| Barrel plating   | Gold             |
| Spring material  | High-grade steel |
| Spring plating   | Uncoated         |

### Family drawing

All measurements are in mm.

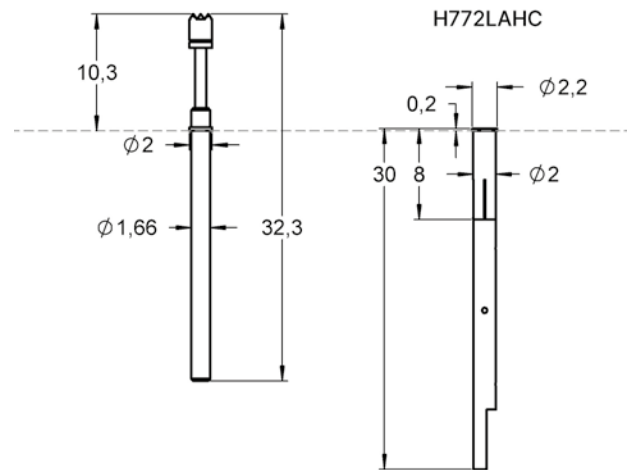

### Thermal Rise of Contact Probe vs. Current

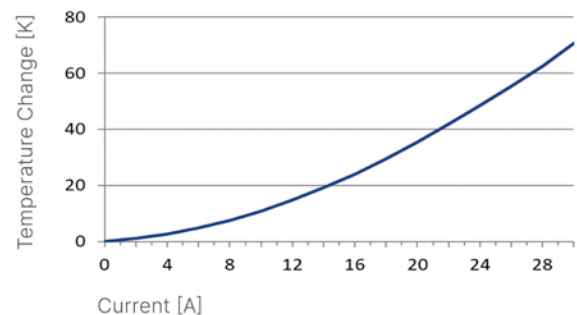

### Accessories

|                     |                  |
|---------------------|------------------|
| Tool for receptacle | FEWZ-772         |
| Tool for probe      | 1003566-FDWZ-100 |
| Other               | 1007939-H772LAHC |

Tip style 1

